

- BF271 Screw Type
- BF281 Quick Terminal Type

## 6 Circuits ATP Fuse Block Module

Modular Design with Fuse Blown Indication LEDs

# 1


- Build your own fuse block
  - Cascade with another BF271 to become 12P Block
  - Cascade with BF272 to become 6P Block with Negative Bus Bar
- 60 pieces assorted label stickers set included
- Storage for 2 spare fuses
- LED indication of blown fuses

Instructions for building your own ATP fuse block:

### A. 6 Circuits Fuse Block with Negative Bus Bar (BF271 + BF272)

**A-1** Remove the side base of BF271

**A-2** Cascade BF271 & BF272 as illustrated

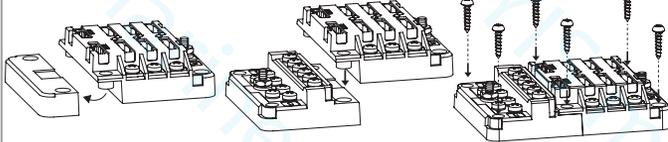

### B. 12 Circuits Fuse Blocks (BF271 + BF271)

**B-1**

**B-2** Cascade 2 BF271 (the one without stud on the left)


- ① Remove nut & washer
- ② Remove rubber cover
- ③ Remove stud with screw driver
- ④ Remove side base of another BF271 (as shown in A-1)

- ① Use another stud to screw tightly (M4, included in bag)
- ② Cover rubber cover back

※ Repeat Steps **A** & **B** to cascade as many fuse blocks you like. (note: total amperage rating cannot exceed 100A for the whole block)

## Specifications

- Voltage Rating | DC 32V Max
- Amp Rating per Branch | 30A (Screw Terminals) / 20A (Quick Terminals)
- Max Cumulative Amp | 100A per block
- Terminal Stud Size | M5(3/16")
- Branch Terminal | M4(5/32") Screw(BF27X) / 0.25" Quick Terminal(BF28X)

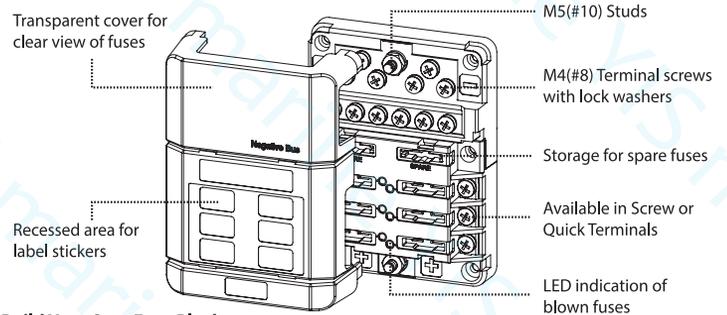

### Build Your Own Fuse Blocks:

6P Fuse Block

12P Fuse Block



6P Fuse Block with Negative Bus Bar

12P Fuse Block with Negative Bus Bar

