

Normal Cigarette Lighter Plugs

with AGC/JMC Fuses




Bendable Car Cigarette Plug with Switch and Fuse

AP120

PATENTED
TW



- Replaceable AGC/JMC Fuses
- Bendable with multiple angle positions ($\pm 60^\circ$)
- Built-in On-Off Switch
- LED power indicator
- Latching collar that latches onto retainers in cigarette lighter sockets
- Designed for both Size A ($\varnothing 21.0\text{mm}$) & Size B ($\varnothing 22.0\text{mm}$) Sockets
- Amp Rating : 10A
- Patented : TW No. P-053789
- CE

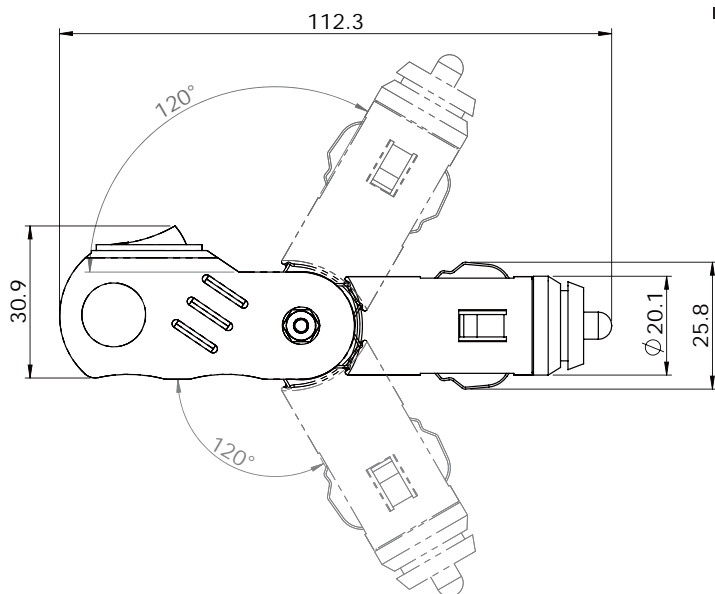

http://www.yismarine.com/en/product/AP120-Bendable-Car-Cigarette-Plug-with-Switch/Cigarette_Lighter_Plug-AP120.html

Related Product



F-AGC
AGC(3AG) Fuses
Fast-acting glass-tube fuses



F-JMC
JMC Fuses Fast-acting glass-tube fuses

Wiring for AP Series

Most of our AP products can be sold pre-wired, please refer to the following coding table for ordering details:

Coding Guide for pre-wired AP Cigarette Lighter Plugs

AP111□□ □□ - □□# - □□"
(1) (2) (3) (4)

(1) Cord Types	(2) Lead Process	(3) Wire Gauge	(4) Wire Length
1 Straight Cord – 2C	C Cut	□□# AWG #	□□" Length in inches
2 Coil Cord (Ribbon)	T Tinned/Stripped	□□mm Φ in mm (for cord type 3 & 4 only)	□□cm Length in cm
3 Round Cord (choose one below)	Q 0.250"Female Quick Connect Terminal		□□' Length in feet
3A Double Conductors	P DC Plug (180°) (choose one below)		□□m Length in meters
3B Single Shielded			
4 Coil Cord/ Round (choose one below)	P1 2.1 x 5.5mm		
4A Double Conductors	P2 2.5 x 5.5mm		
4B Single Shielded	P3 1.3 x 3.5mm		
5 Electronic Cord (choose one below)	P4 3 x 6.3mm		
5A UL1015	R DC Plug (90°) (choose one below)		
5B UL1007	R1 2.1 x 5.5mm		
6 Internal Hook-up (2 x 0.75mm)	R2 2.5 x 5.5mm		
	R3 1.3 x 3.5mm		
	R4 3 x 6.3mm		
	S Cigarette Lighter Socket (choose one below)		
	S1 AS201(Assembled)		
	S2 AS208(Molded)		
	J DC Jack (choose one below)		
	J1 2.1 x 5.5mm		
	J2 2.5 x 5.5mm		

Cord Types



Straight Cord – 2C



Coil Cord



Round Cord



Coil Cord/ Round



Electronic Cord



Internal Hook-up

Lead Process



Cut



Tinned/Stripped



0.250"Female
Quick Connect
Terminal



DC Plug (180°)



DC Plug (90°)



AS201



AS208

Cigarette Lighter Sockets



DC Jack