


## Normal Cigarette Lighter Plugs


with AGC/JMC Fuses



### Bakelite Cigarette Lighter Plug with Fuse AP110



- Replaceable AGC/JMC Fuses
- Heat-resistant Bakelite body
- Heavy-duty (20A) model available
- Designed for both Size A ( $\phi$  21.0mm) & Size B ( $\phi$ 22.0mm) Sockets
- Amp Rating :  
Standard Model: 5A  
Enhanced Model: 20A
- 

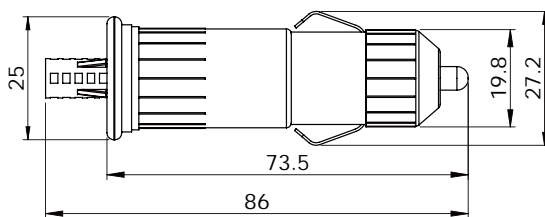

[http://www.yismarine.com/en/product/AP110-Bakelite-Cigarette-Lighter-Plug/Cigarette\\_Lighter\\_Plug-AP110.html](http://www.yismarine.com/en/product/AP110-Bakelite-Cigarette-Lighter-Plug/Cigarette_Lighter_Plug-AP110.html)

#### Related Product



**AP101**  
Bakelite Cigarette  
Lighter Plug with Fuse



**AP109**  
Illuminated Cigarette  
Lighter Plug with Fuse



**F-AGC**  
AGC(3AG) Fuses  
Fast-acting glass-tube  
fuses



**F-JMC**  
JMC Fuses Fast-acting  
glass-tube fuses



**AP116**  
Three Way Cigarette  
Lighter Sockets Splitter  
with Fuse

## Wiring for AP Series

Most of our AP products can be sold pre-wired, please refer to the following coding table for ordering details:

### Coding Guide for pre-wired AP Cigarette Lighter Plugs

AP111□□ □□ - □□# - □□"  
(1) (2) (3) (4)

(1) Cord Types		(2) Lead Process		(3) Wire Gauge		(4) Wire Length	
1	Straight Cord – 2C	C	Cut	□□#	AWG #	□□"	Length in inches
2	Coil Cord (Ribbon)	T	Tinned/Stripped	□□mm	Φ in mm (for cord type 3 & 4 only)	□□cm	Length in cm
3	Round Cord (choose one below)	Q	0.250"Female Quick Connect Terminal			□□'	Length in feet
3A	Double Conductors	P	DC Plug (180°) (choose one below)			□□m	Length in meters
3B	Single Shielded						
4	Coil Cord/ Round (choose one below)	P1	2.1 x 5.5mm				
4A	Double Conductors	P2	2.5 x 5.5mm				
4B	Single Shielded	P3	1.3 x 3.5mm				
		P4	3 x 6.3mm				
5	Electronic Cord (choose one below)	R	DC Plug (90°) (choose one below)				
5A	UL1015	R1	2.1 x 5.5mm				
5B	UL1007	R2	2.5 x 5.5mm				
		R3	1.3 x 3.5mm				
		R4	3 x 6.3mm				
6	Internal Hook-up (2 x 0.75mm)	S	Cigarette Lighter Socket (choose one below)				
		S1	AS201(Assembled)				
		S2	AS208(Molded)				
		J	DC Jack (choose one below)				
		J1	2.1 x 5.5mm				
		J2	2.5 x 5.5mm				

#### Cord Types



Straight Cord – 2C



Coil Cord



Round Cord



Coil Cord/ Round



Electronic Cord



Internal Hook-up

#### Lead Process



Cut



Tinned/Stripped



0.250"Female  
Quick Connect  
Terminal



DC Plug (180°)



DC Plug (90°)



AS201



AS208



DC Jack