


Digital Smart Switch Panel with Screw-Down Terminal Blocks (2025)

New Product PATENTED TW

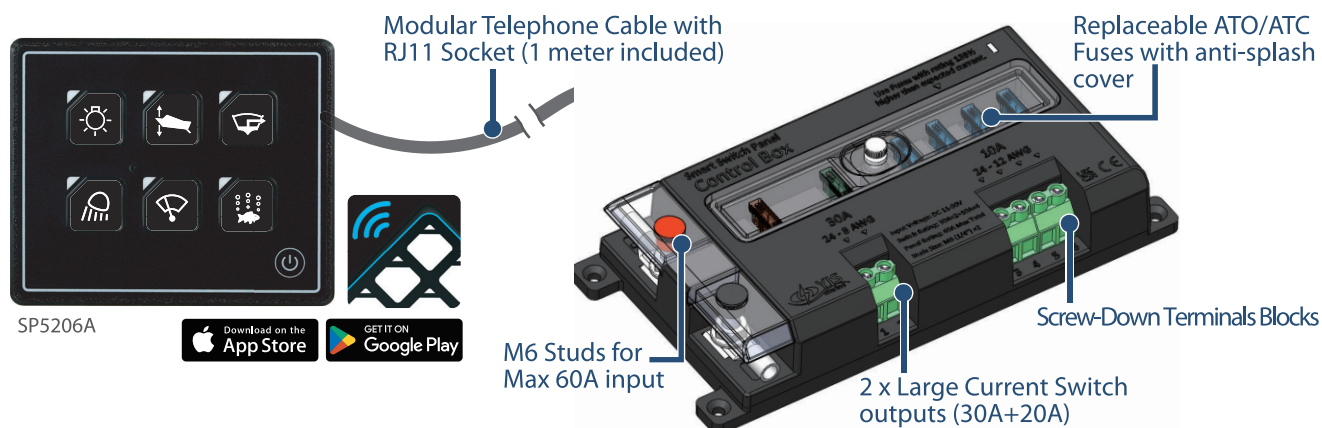




YIS Marine's New Digital Smart Switch Panel is upgraded with screw-down terminal blocks for secure, stable, and vibration-resistant wiring. Each circuit is protected by replaceable ATO/ATC fuses, allowing flexible use for lights, pumps, fans, and other DC loads. The RJ11 modular cable keeps the installation neat and allows flexible cable routing. Two larger amperage output branches support higher current devices without using external relays. The new control app also provides programmable switching features such as "delayed-off" and "loop" functions. These improvements make the system easier to install, safer to maintain, and more reliable for marine, RV, 4WD, and industrial DC power applications.

Features

- Ultra compact panel Size
- Easy to install – no mounting depth, minimum hole drilling (17 x 21 mm)
- Screw-down terminal blocks provide secure wire clamping and stable connection
- Designed for reliable wiring in vibration-prone environments
- 2 larger amperage branches (#1: 30A, #2: 20A) support higher current devices without external relays
- 1 meter modular telephone cable with RJ11 socket included, easy to wire and replace with different lengths up to 10m
- Individual replaceable ATO/ATC fuses support different circuit loads
- New digital smart control APP allows advanced switching such as "delayed-off" and "loop"
- Customizable labels and panel styles in app
- Battery voltage monitoring and low voltage warning in app
- Self-dimming backlight on panel
- 50pcs assorted label stickers included (3 versions available: Marine / RV / 4WD)
- Pairs up to 4 different control boxes and allows easy switching between boxes
- App memorizes label and panel styles of paired boxes after switching between boxes

Specifications

- Faceplate | PET membrane touch panel
- Circuit Protection | Replaceable Automotive Fuse (ATO/ATC)
- Panel Ratings | 30A for circuit #1, 20A for #2, 10A for #3–6 @ DC 12–24V
- Maximum Cumulative Amp | 60A (6P)
(Max possible Amperage for each panel is determined by the lower of total switches ratings or the Max Cumulative Amperage listed above)
- Notes | CE IP67 (Membrane Panel) RED Directive (2014/53/EU)

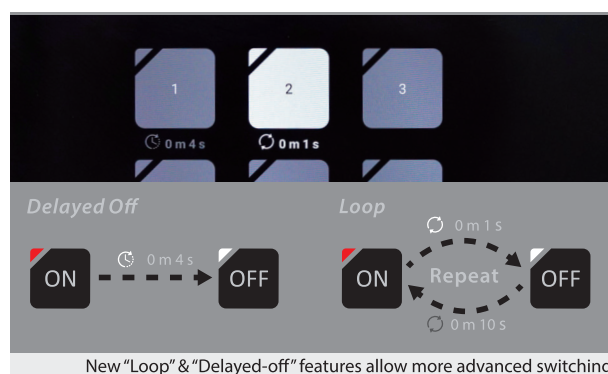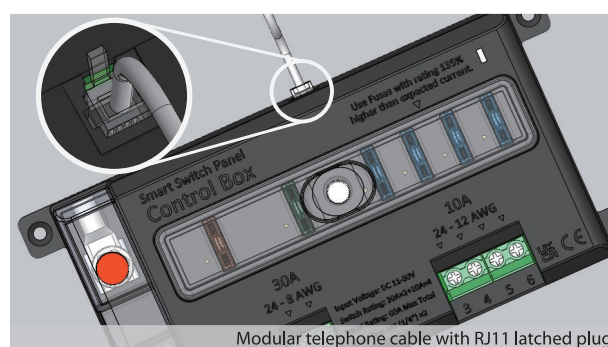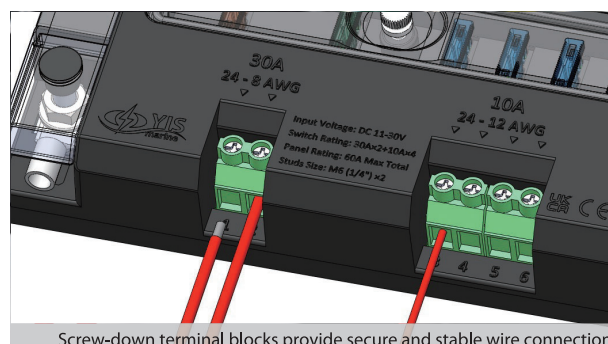

Digital Membrane Touch Control Panels (2019- 4th Gen)



Mobile App only available for SP5110A / SP5106A

Features

- Ultra Compact panel size
- Easy to install – no mounting depth, minimum hole drilling (13.0 x 8.5mm)
- 1 meter micro-USB cable included, end user can replace cables of any desirable length
- ON-indication LED / 10A Self-resettable fuse for each branch
- Backlight module on panel
- Programmable momentary feature for all buttons
- 60pcs Assorted labels stickers set included


Additional Features for SP5106A / SP5110A (App Version)

- App remote control on cellphone via Bluetooth
- Customizable labels and panel styles in App
- Battery voltage monitoring and low voltage warning in app
- Pairs up to 4 different control boxes and easily switching between boxes
- App memorizes label and panel styles of paired boxes after switching between boxes



Specifications

- Faceplate | PET membrane touch panel
- Circuit Protection | Built-in Resettable Fuse (PPTC)
- Switch Ratings | 10A per branch
- Panel Rating | Max Cumulative Amp: 35A (6P) / 60A (10P)
- Voltage Rating | DC 9–15V (12V Model) / DC 11–30V (12–24V Model)
- Notes | CE IP67 (Panel Only) RED Directive (2014/53/EU)
- Patented

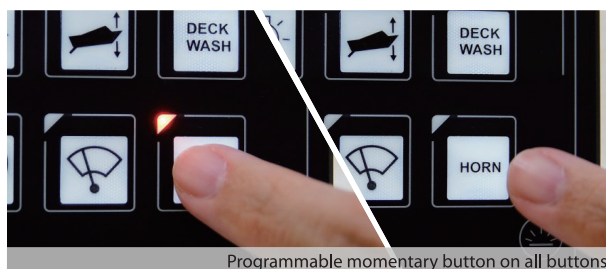

Programmable momentary button on all buttons

Product Series

SP5106D / SP5106A (6P)



6P Membrane Panel



6P Remote Control Box




60pcs Label Stickers



Micro USB Cable (1m)

SP5110D / SP5110A (10P)



10P Membrane Panel



10P Remote Control Box




60pcs Label Stickers



Micro USB Cable (1m)

Accessories

SP-51-EP20A

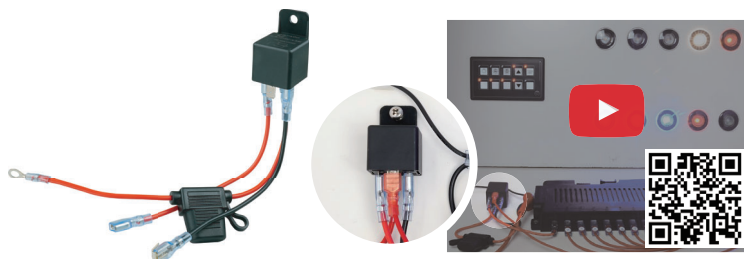

Membrane Touch Panel 20A Expansion Kit

This Expansion Kit allows end users to expand current rating of single branch to 20A without disassembling control box. This Kit works for all SP51xx models. Instructions manual included.



C-7 Aluminum Water-resistant Switch Panel

Upgraded IP66 switch panel design with backlight for labels



Product ID	Positions	Color	Circuit Protection	Product Dimension (W x H x D)	Panel Cut-out (W x L)	Note
SP3216P	6	Dark Gray	Circuit Breakers	114 x 191 x 75 mm	96 x 166 mm	
SP3218P	8	Dark Gray	Circuit Breakers	114 x 238 x 75 mm	96 x 217 mm	
SP3234P	4	Dark Gray	Circuit Breakers	114 x 191 x 75 mm	96 x 166 mm	with USB Charger & Cig. Lighter Socket
SP3254P	4	Dark Gray	Circuit Breakers	114 x 191 x 75 mm	96 x 166 mm	with Battery Gauge & Cig. Lighter Socket
SP3274P	4	Dark Gray	Circuit Breakers	114 x 191 x 75 mm	96 x 166 mm	with Battery Gauge & USB Charger

Features

- New modern and compact panel design (15% smaller than SP30xx series)
- Backlight modules for labels, allowing easy operation in darkness
- IP66–protect against strong water jets
- Push-reset circuit breakers with rubber boots
- Illuminated (LED) C-7 rocker switches with dual voltage rating (12V / 24V)
- Watertight mounting gasket included
- Square shaped label stickers (30pcs) allow vertical or horizontal installation

Specifications

- Faceplate | 0.1"(2.54mm) Coated Aluminum Alloy
- Circuit Protection | Circuit Breakers
- Switch Ratings | 20A @ DC 12V / 10A @ DC 24V (Dual Voltage)
- Panel Rating | Maximum Cumulative Amp: 45A, 45A x 2 (8P)*
- Notes | IP66

* Max possible Amperage for each panel is determined by the lower of total switches ratings or the Max Cumulative Amperage listed above.



YIS exclusive backlight modules



IP66 rated



4-way installations


C-7 Curved Water-resistant Switch Panel

Upgraded streamline switch panel design with backlight for labels

Watch Intro Video on Youtube



SP3314P

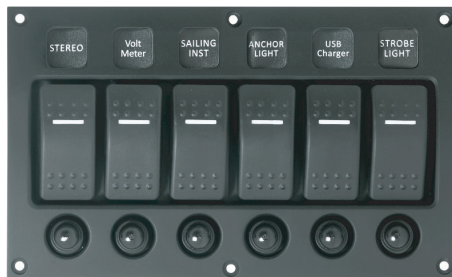

SP3316P



SP3320XX



SP3331XX

Product ID	Positions	Color	Circuit Protection	Product Dimension (W x H x D)	Panel Cut-out (W x L)	Note
SP3314P	4	Black	Circuit Breakers	114 x 133 x 75 mm	101 x 120 mm	
SP3316P	6	Black	Circuit Breakers	114 x 188 x 75 mm	101 x 166 mm	
SP3320XX	-	Black	Circuit Breakers	114 x 58 x 56 mm	105 x 45 mm	2 Gang Mini Socket Panel*
SP3331XX	1	Black	-	114 x 54 x 75mm	103 x 42 mm	1P Switch Panel for special purposes

* See table below for available sockets combinations

Socket options for SP3320XX	
Product ID	Socket Mounted
SP3320PP	AS212 x2
SP3320PU	AS212 + AS233
SP3320PV	AS212 + AS234
SP3320PG	AS212 + SP-BG1
SP3320XX	Any combination of two

SP3331 Series	
Product ID	Socket Mounted
SP3331BP	Bilge Pump Switch Panel
SP3331BA	Bilge Pump Switch Panel with Alarm
SP3331DW	Deck Wash Control Panel
SP3331WC	Windlass Control Panel

* See next page for more details of SP3331 Series

Features

- New modern curved and compact panel design (15% smaller than SP30xx series)
- Mini modular panels allow free combinations at consumers' side
- Backlight modules for labels, allowing easy operation in darkness
- IP66–protect against strong water jets
- Push-reset circuit breakers with rubber boots
- Illuminated (LED) C-7 rocker switches with dual voltage rating (12V / 24V)
- Watertight mounting gasket included
- Square shaped label stickers (30pcs) allow vertical or horizontal installation

Specifications

- Faceplate | Curved shaped plastic (ASA)
- Circuit Protection | Circuit Breakers
- Switch Ratings | 20A @ DC 12V / 10A @ DC 24V (Dual Voltage)
- Panel Rating | Maximum Cumulative Amp: 45A*
- Notes | IP66

* Max possible Amperage for each panel is determined by the lower of total switches ratings or the Max Cumulative Amperage listed above.




Backlight modules for label stickers



Vertical or horizontal Installations



Mini modular panels allow freedom for customized panels

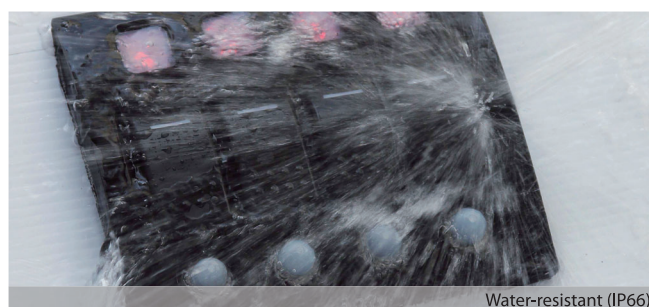


Water-resistant (IP66)

SP3331 1 Gang Curved Switch Panel Series

Bilge Pump Switch Panel with Alarm

SP3331BA ON-OFF-ON

SP3331BAM ON-OFF-(ON)

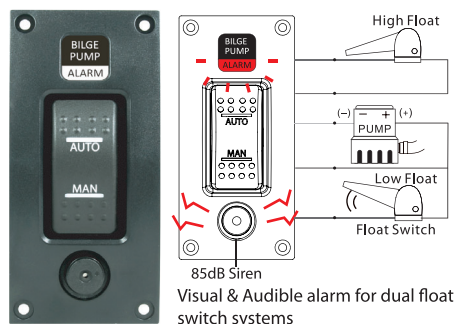

Features

- Modern design bilge pump panel with visual and audible alarm (85dB Siren)
- Activates alarms and starts pump automatically when water reaches 2nd (high) float switch
- IP67 C-7 Sealed Switch and water-resistant Siren
- Backlight label module allowing easy recognition in darkness
- Fit perfectly with SP33 series regular panels

Specifications

- Faceplate | Curved shaped plastic (ASA)
- Dimensions | 114 x 54 x 75mm
- Circuit Protection | Pre-installed ATP Fuse 20A
- Switch Function | ON-OFF-ON(SP3331BA) / ON-OFF-(ON)(SP3331BAM)
- Switch Rating | 20A @ DC 12V
- Notes | IP66

Curved Design Single Branch (1P) Switch Panel

SP3331XX



SP3331ST



SP3331DT



SP3331DW



SP3331WC



SP3331BP

Features

- Blank 1P panel that goes well with other SP33 series panels
- C-7 sealed IP67 switch with dual (12-24V) voltage rating
- Backlight label module allowing easy recognition in darkness
- 5 pcs assorted label stickers
- Various Switch functions available

Specifications

- Faceplate | Curved shaped plastic (ASA)
- Dimensions | 114 x 54 x 75mm
- Circuit Protection | Circuit Breaker 20A
- Switch Function | See Table
- Switch Rating | 20A @ DC 12V / 10A @ DC 24V (Dual Voltage)
- Notes | IP66

Blank Panels

Product ID	Type	Switch Function	Note
SP3331ST	SPST	ON-OFF	Blank panel with 5pcs label stickers
SP3331STM	SPST	(ON)-OFF	Blank panel with 5pcs label stickers
SP3331DT	SPDT	ON-OFF-ON	Blank panel with 5pcs label stickers
SP3331DTM	SPDT	(ON)-OFF-ON	Blank panel with 5pcs label stickers
SP3331DTM2	SPDT	(ON)-OFF-(ON)	Blank panel with 5pcs label stickers

Functional Panels

Product ID	Type	Switch Function	Note
SP3331DW	SPDT	ON-OFF	Deck Wash Panel
SP3331WC	SPDT	(ON)-OFF-(ON)	Windlass Control Panel
SP3331BP	SPDT	ON-OFF-ON	Standard Bilge Pump Panel
SP3331BPM	SPDT	ON-OFF-(ON)	Standard Bilge Pump Panel

Label Stickers for SP32 / 33 Series SP33-ST1



- 30pcs assorted Water-proof PC membrane label stickers
- Designed for SP32 / SP33 backlight modules
- Customizable to local languages or applications

Curved Water-resistant USB Panel SP3331USB



Features

- Double port USB charger (AS235) fully compatible with latest iPad, iPhone and smartphones
- Backlight label module allowing easy recognition in darkness
- Fit perfectly with SP33 series regular panels

Specifications

- Faceplate | Curved shaped plastic (ASA)
- Dimensions | 114 x 54 x 75mm
- Circuit Protection | Circuit Breaker 5A
- Input | DC 12-24V
- Output | DC 5V 3.4A
- Notes | IP66

Curved Water-resistant Voltage Meter Panel SP3331VM – Voltage Meter Panel SP3331DM – Dual (Voltage & Current) Meter Panel



SP3331VM

SP3331DM

Features

- Digital meters with 3 LED displays (SP-BG4 / SP-BG5)
- Backlight label module allowing easy recognition in darkness
- Fit perfectly with SP33 series regular panels

Specifications

- Faceplate | Curved shaped plastic (ASA)
- Dimensions | 114 x 54 x 75mm
- Input Range | DC 2.5V – 30V (SP3331VM) / DC 4.5V – 30V, 0 – 15A (SP3331DM)
- Notes | IP66



Premium Series Slimline Switch Panel


with Polished Stainless Bezel and 20A Push Button Switches



SP6006



SP6006B

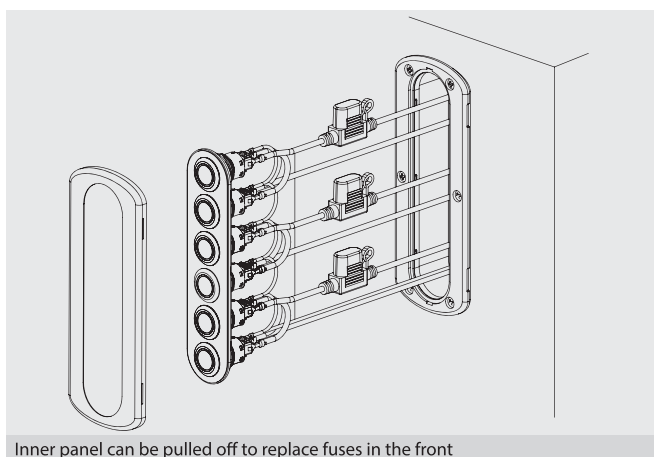

Inner panel can be pulled off to replace fuses in the front

Product ID	Positions	Circuit Protection	Product Dimension (W x H x D)	Panel Cut-out (W x L)	Note
SP6006	6	ATP Fuses	64 x 169 x 105 mm	32 x 150 mm	Red LED Backlight
SP6006B	6	ATP Fuses	64 x 169 x 105 mm	32 x 150 mm	Blue LED Backlight

Specifications

- Faceplate | Plastic with Carbon Fiber Vinyl Film
- Outer Frame | Stainless Steel 304
- Circuit Protection | in-line 15A ATP fuses pre-installed (per 2 branches)
- Switch Rating | 20A @ DC 12V
- Panel Rating | Max Cumulative Amp: 25A per 2 branches
- Notes | IP66

* Max possible Amperage for each panel is determined by the lower of total switches ratings or the Max Cumulative Amperage listed above.

Description

Looking for some elegant and premium panel with powerful outputs? Meet these new carbon fiber / stainless steel hybrid panel with market leading 20A stainless steel push button switches. Carefully design with screw-hidden polished bezel, backlight labels on the button and 3D carbon fiber panel finish, this is the most elegant panel in YIS lineup.

Features

- Elegant Carbon Fiber Vinyl film with vivid 3D texture
- Ultra Compact Panel Size / mounting holes compatible BEP's Contour Panel Series
- Screw hidden design with polished stainless steel 304 bezel
- 20A Anti-Vandal Stainless Steel Push Button Switches with backlight labels
- Easy fuse-replacing design - fuse holder retractable from the front (Patent Pending)
- 40 pcs assorted label stickers included
- IP66 – Protected against powerful water jets from all directions (when mounted)
- Water-tight gasket included

Accessories

PB4511



Push-Button
Switch

DC 12V 20A
DC 24V 10A
SPST ON-OFF

BF353



In-Line ATP Fuse
Holders

DC 12V/24V 1-30A

Modern Design Toggle Switch Panel

Intro Video



Compact economical toggle switch panel with fuse protection



Features

- Compact panel size
- Unique trendy faceplate design (two colors available: Dark Gray /White)
- Heavy duty metal toggle switches with water-resistant PVC boot
- Water-tight mounting gasket included
- LED indication when device turned ON
- 28pcs assorted label stickers included
- IP66 – Protected against powerful water jets from all directions (when mounted)
- Spray-proof in-line ATP/ATC fuse holders with fuses pre-installed

Specifications

- Faceplate | Sleek Design Plastic (ABS)
- Circuit Protection | In-line 15A ATP fuses pre-installed (per 2 branches)
- Switch Ratings | 15A @ DC 12V / 10A @ DC 24V (Dual Voltage)
- Panel Rating | Max Cumulative Amp: 25A per 2 branches*
- Notes | IP66

* Max possible Amperage for each panel is determined by the lower of total switches ratings or the Max Cumulative Amperage listed above.

Additional Features for SP21XX-RG

- Upgraded with Dual LED colors indication
- Enhanced cable connection



IP66 rated – protected against power jets

SP21XX-RG – Dual LED Color Version



Upgraded with Dual LED colors indication



Enhanced cable connection



SP2116



SP2125P



SP2125U



SP2125G



SP2123X

Gray Panel	White Panel	Positions	Circuit Protection	Product Dimension (W x H x D)	Panel Cut-out (W x L)	Note
SP2116	SP2136	6	ATP Fuses	107 x 95 x 45 mm	87 x 78 mm	
SP2125P	SP2145P	5	ATP Fuses	107 x 95 x 60 mm	87 x 78 mm	with Cig. Lighter Socket
SP2125U/V	SP2145U/V	5	ATP Fuses	107 x 95 x 60 mm	87 x 78 mm	USB Charger (U: 1Port V:2Port)
SP2125G	SP2145G	5	ATP Fuses	107 x 95 x 45 mm	87 x 78 mm	with Digital Battery Gauge
SP2123P	SP2143P	3	ATP Fuses	107 x 95 x 60 mm	87 x 78 mm	with Cig. Lighter Socket
SP2123U/V	SP2143U/V	3	ATP Fuses	107 x 95 x 60 mm	87 x 78 mm	USB Charger (U: 1Port V:2Port)
SP2123G	SP2143G	3	ATP Fuses	107 x 95 x 45 mm	87 x 78 mm	with Digital Battery Gauge

※ add -RG in the end of Model # for dual LED color version - ON = Green, OFF = Red)



Wave Design Switch Panel

Economical switch panels with circuit breakers

PATENTED
TW

Best
Seller



SP1214P



SP1216P



SP1218P



SP1220XX



SP12XXPW
(Anti-Splash version for all models)

Product ID	Positions	Circuit Protection	Product Dimension (W x H x D)	Panel Cut-out (W x L)	Note
SP1214P	4	Circuit Breakers	100 x 110 x 45 mm	77 x 97.5 mm	
SP1216P	6	Circuit Breakers	100 x 160 x 45 mm	77 x 148 mm	
SP1218P	8	Circuit Breakers	100 x 210 x 45mm	77 x 198 mm	
SP1220XX	-	-	100 x 54 x 56mm	82.5 x 38 mm	2 gang mini socket panel

※ Anti-splash version with rubber boots for switches and circuit breakers are now available for all models above.

Socket options for SP1220XX	
Product ID	Socket Mounted
SP1220PP	AS212 x2
SP1220PU	AS212 + AS233
SP1220PV	AS212 + AS234
SP1220PG	AS212 + SP-BG1
SP1220XX	Any combination of two

Features

- 12V DC illuminated (LED) rocker switches
- Pre-wired with resettable circuit breakers
- Ultra shallow mounting depth (~45mm)
- 28 assorted label stickers included


Specifications

- Faceplate | Wave shaped plastic (ABS)
- Circuit Protection | Circuit breakers
- Switch Ratings | 10A @ DC 12V
- Panel Rating | Maximum Cumulative Amp: 35A*
- Note |
- Patented in Taiwan | D155080(TW)

* Max possible Amperage for each panel is determined by the lower of total switches ratings or the Max Cumulative Amperage listed above.



unique, patented wave faceplate design



mounting depth as shallow as 45mm



anti-splash version available

Other Switch Panels


The New Classic Rocker Switch Panel (Redesign 2015)



SP1113F



SP1123F



SP1116F



SP1126F



SP1116P



SP1126P



SP1051

Features

- Classic coated aluminum panel design
- LED illuminated rocker switches
- Pop-out fuse holders with 10A fuse per branch pre-installed (fuse models)
- Circuit Breaker version available for all models
- 20pcs assorted label stickers
- Square shaped stickers allowing vertical or horizontal installation

Specifications

- Faceplate | 1.25mm Coated Aluminum
- Circuit Protection | Fuse / Circuit Breakers
- Switch Ratings | 10A @ DC 12V
- Panel Rating | Maximum Cumulative Amp: 35A*
- Notes | **CE**

* Max possible Amperage for each panel is determined by the lower of total switches ratings or the Max Cumulative Amperage listed above.

Product ID	Circuit Protection	Dimension (W x H x D)	Panel Cut-out (W x L)
SP1113F	Fuses	117 x 97 x 70 mm	70 x 65 mm
SP1116F	Fuses	117 x 167 x 70 mm	70 x 130 mm
SP1123F	Fuses	117 x 97 x 70 mm	70 x 65 mm
SP1126F	Fuses	117 x 167 x 70 mm	70 x 130 mm
SP1116P	Circuit Breakers	117 x 167 x 70 mm	95 x 125 mm
SP1126P	Circuit Breakers	117 x 167 x 70 mm	95 x 125 mm
SP1051	-	83 x 64 x 50 mm	65 x 50 mm

※ Anti-splash version with covers for switches available

Bakelite Toggle Switch Panels with Fuses



SP2013F



SP2016F

Features

- Classic toggle switch
- Fuse holders with 5A fuses pre-installed
- Optional anti-splash PVC boots available

Specifications

- Faceplate | Bakelite
- Circuit Protection | Fuses
- Switch Ratings | DC 12V / 24V
- Panel Rating | Maximum Cumulative Amp: 15A
- Notes | **CE**

Product ID	Dimensions (W x H x D)	Panel Cut-out(W x L)
SP2013F	114 x 92 x 35 mm	90 x 75 mm
SP2016F	114 x 161 x 35 mm	90 x 140 mm

Windlass Controlling Panel with LED
SP2211



Product ID	Dimensions (W x H x D)	Panel Cut-out(W x L)
SP2211	52 x 76 x 35 mm	40 x 45 mm

Features

- Momentary (ON)-OFF-(ON) Toggle Switch with PVC Boot
- Red Lamp Indicator

Specifications

- Faceplate | Aluminum Plate
- Circuit Protection | -
- Switch Ratings | DC 12V
- Panel Rating | 15A @ DC 12V
- Notes |

3-Way Bilge Pump Switch Panel
SP2221AF/BF



- SP2221AF : ON-OFF-ON Bilge Pump Switch Panel with Fuse (AUTO-OFF-AUTO)
- SP2221BF : ON-OFF-(ON) Bilge Pump Switch Panel with Fuse (AUTO-OFF-MANUAL)

Product ID	Dimensions (W x H x D)	Panel Cut-out(W x L)
SP2221AF/BF	90 x 50 x 45 mm	75 x 38 mm

Features

- 3-Way toggle switch (ON-OFF-ON) with LED indication
- Fuse holders with pre-installed fuses
- Optional anti-splash PVC boots available

Specifications

- Faceplate | Plastic (ABS)
- Circuit Protection | Fuse
- Switch Ratings | DC 12V
- Panel Rating | Maximum Cumulative Amp: 5A
- Notes |

C-7 Streamline Water-resistant Switch Panel



SP3114P

SP3116P

Product ID	Dimensions (W x H x D)	Panel Cut-out(W x L)
SP3114P	133 x 121 x 75 mm	97 x 101 mm
SP3116P	133 x 173 x 75 mm	97 x 153 mm



Features

- Unique streamline faceplate design
- IP66– protect against strong water jets from all directions (when mounted)
- Push-reset circuit breakers with rubber boots
- Illuminated (LED) C-7 rocker switches with dual voltage rating (12V / 24V)
- Watertight mounting gasket included
- 30 pcs assorted label set included

Specifications

- Faceplate | Streamline shaped plastic (ABS)
- Circuit Protection | Circuit Breakers
- Switch Ratings | 20A @ DC 12V / 10A @ DC 24V (Dual Voltage)
- Panel Rating | Maximum Cumulative Amp: 45A*
- Notes | IP66

* Max possible Amperage for each panel is determined by the lower of total switches ratings or the Max Cumulative Amperage listed above.

C-6 Water-resistant Switch Panel



SP3013F



SP3013P



SP3016F



SP3016P



SP3023F



SP3023P



SP3033F



SP3033P

Features

- IP55– protect against water jets from all directions (when mounted)
- Both circuit breaker and fuse versions available
- Illuminated water-resistant C-6 rocker switches
- Watertight mounting gasket included
- 30 pcs assorted label set included

Specifications

- Faceplate | 0.1”(2.54mm) Coated Aluminum Alloy
- Circuit Protection | Fuse/Circuit Breaker
- Switch Ratings | 16A @ DC 12V
- Panel Rating | Maximum Cumulative Amp : 35A*
- Notes | IP55

* Max possible Amperage for each panel is determined by the lower of total switches ratings or the Max Cumulative Amperage listed above.

Product ID	Circuit Protection	Dimension (W x H x D)	Panel Cut-out (W x L)	Note
SP3013F	Fuses	134 x 95 x 75 mm	75 x 75 mm	
SP3013P	Circuit Breakers	134 x 95 x 75 mm	80 x 75 mm	
SP3016F	Fuses	134 x 190 x 75 mm	75 x 166 mm	
SP3016P	Circuit Breakers	134 x 190 x 75 mm	80 x 166 mm	
SP3023F	Fuses	134 x 190 x 80 mm	75 x 158 mm	with DIN Socket, Cig. Lighter Socket with Retainer and Battery Gauge
SP3023P	Circuit Breakers	134 x 190 x 80 mm	80 x 158 mm	with DIN Socket, Cig. Lighter Socket with Retainer and Battery Gauge
SP3033F	Fuses	134 x 190 x 80 mm	75 x 155 mm	with Cig. Lighter Socket and Battery Gauge
SP3033P	Circuit Breakers	134 x 190 x 80 mm	80 x 155 mm	with Cig. Lighter Socket and Battery Gauge

Ignition Switch Panel

SP4010 / SP4011



Features


- LED ON Indicator
- 2 Keys included

Specifications

- Faceplate | Nylon 66
- Circuit Protection | -
- Switch Ratings | DC 12V
- Panel Rating | 10 A

Product ID	Dimensions (Wx H x D)	Panel Cut-out(W x L)
SP4010	69 x 69 x 45mm	φ40mm
SP4011	69 x 69 x 45mm	φ40mm

SP Series Selection Guide

Product	SP5206A New	SP5106D / SP5106A	SP5110D / SP5110A	SP3216P
				
Page no.	P.2	P.3	P.3	P.4
Positions	6P	6P	10P	6P
Faceplate	PET membrane touch panel	PET membrane touch panel	PET membrane touch panel	2.54mm Coated Aluminum
Circuit Protection	Replaceable Automotive Fuse	Built-in Resettable Fuse	Built-in Resettable Fuse	Circuit breakers
Switch Rating	DC 12V 10A	DC 12V 10A	DC 12V 10A	DC 12V 20A / DC 24V 10A
Panel Rating	30A	35A	60A	45A
IP Rating	IP67 (Panel Only)	IP67 (Panel Only)	IP67 (Panel Only)	IP66
Dimensions (W x H x D)	ø28 mm (17 x 21 mm)	ø15 mm (13 x 8.5 mm)	ø15 mm (13 x 8.5 mm)	114x191x75 mm
Note		SP5106D: 12V/24V SP5106A: App Control Ver.	SP5110D: 12V/24V SP5110A: App Control Ver.	

Product	SP3218P	SP3234P	SP3254P	SP3274P
				
Page no.	P.4	P.4	P.4	P.4
Positions	8P	4P	4P	4P
Faceplate	2.54mm Coated Aluminum	2.54mm Coated Aluminum	2.54mm Coated Aluminum	2.54mm Coated Aluminum
Circuit Protection	Circuit breakers	Circuit breakers	Circuit breakers	Circuit breakers
Switch Rating	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A
Panel Rating	45Ax2	45A	45A	45A
IP Rating	IP66	IP66	IP66	IP66
Dimensions (W x H x D)	114x238x75 mm	114x191x75 mm	114x191x75 mm	114x191x75 mm
Note		with USB Charger and Cig. Lighter Socket	with Battery Gauge and Cig. Lighter Socket	with Battery Gauge and USB Charger

Product	SP3314P	SP3316P	SP3320XX	SP3331ST
				
Page no.	P.5	P.5	P.5	P.6
Positions	4P	6P	-	1P
Faceplate	Curved shaped plastic (ASA)	Curved shaped plastic (ASA)	Curved shaped plastic (ASA)	Curved shaped plastic (ASA)
Circuit Protection	Circuit breakers	Circuit breakers	-	Circuit Breaker 20A
Switch Rating	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A
Panel Rating	45A	45A	-	-
IP Rating	IP66	IP66	IP66	IP66
Dimensions (W x H x D)	114x133x75 mm	114x188x75 mm	114x58x56 mm	114x54x75 mm
Note			Sockets options: page 63	

Product	SP3331DT	SP3331DW	SP3331WC	SP3331BP
				
Page no.	P.6	P.6	P.6	P.6
Positions	1P	1P	1P	1P
Faceplate	Curved shaped plastic (ASA)	Curved shaped plastic (ASA)	Curved shaped plastic (ASA)	Curved shaped plastic (ASA)
Circuit Protection	Circuit Breaker 20A	Circuit Breaker 20A	Circuit Breaker 20A	Circuit Breaker 20A
Switch Rating	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A
Panel Rating	-	-	-	-
IP Rating	IP66	IP66	IP66	IP66
Dimensions (W x H x D)	114x54x75 mm	114x54x75 mm	114x54x75 mm	114x54x75 mm
Note				

Product	SP3331BA	SP3331USB	SP3331VM	SP3331DM
				
Page no.	P.6	P.7	P.7	P.7
Positions	1P	1P	1P	1P
Faceplate	Curved shaped plastic (ASA)	Curved shaped plastic (ASA)	Curved shaped plastic (ASA)	Curved shaped plastic (ASA)
Circuit Protection	Pre-installed ATP Fuse 20A	Circuit Breaker 5A	-	-
Switch Rating	DC 12V 20A / DC 24V 10A	-	DC 2.5V – 30V	DC 4.5V – 30V, 0 – 15A
Panel Rating	-	-	-	-
IP Rating	IP66	IP66	IP66	IP66
Dimensions (W x H x D)	114x54x75 mm	114x54x75 mm	114x54x75 mm	114x54x75 mm
Note				

Product	SP6006 / SP6006B	SP2116 / SP2116-RG	SP2125X / SP2125X-RG	SP2123X / SP2123X-RG
				
Page no.	P.8	P.9	P.9	P.9
Positions	6P	6P	5P	3P
Faceplate	Plastic with Carbon Fiber Vinyl Film	Sleek Design plastic (ABS)	Sleek Design plastic (ABS)	Sleek Design plastic (ABS)
Circuit Protection	ATP Fuses	ATP Fuses	ATP Fuses	ATP Fuses
Switch Rating	DC 12V 20A	DC 12V 15A / DC 24V 10A	DC 12V 15A / DC 24V 10A	DC 12V 15A / DC 24V 10A
Panel Rating	25A per 2 branches	25A per 2 branches	25A per 2 branches	25A per 2 branches
IP Rating	IP66	IP66	IP66	IP66
Dimensions (W x H x D)	64x169x105 mm	107x95x45 mm	107x95x60 mm	107x95x60 mm
Note			X = P: Cig. Light Socket X = U/V: USB Charger Socket X = G: Digital Voltage Meter	X = P: Cig. Light Socket X = U/V: USB Charger Socket X = G: Digital Voltage Meter

Product	SP1214P	SP1216P	SP1218P	SP1220XX
				
Page no.	P.10	P.10	P.10	P.10
Positions	4P	6P	8P	-
Faceplate	Wave shaped plastic (ABS)	Wave shaped plastic (ABS)	Wave shaped plastic (ABS)	Wave shaped plastic (ABS)
Circuit Protection	Circuit breakers	Circuit breakers	Circuit breakers	-
Switch Rating	DC 12V 10A	DC 12V 10A	DC 12V 10A	-
Panel Rating	35A	35A	35A	-
IP Rating	-	-	-	-
Dimensions (W x H x D)	100x110x45 mm	100x160x45 mm	100x210x45 mm	100x54x56 mm
Note				2 gang mini socket panel

Product	SP1113F / SP1123F	SP1116F / SP1126F	SP1116P / SP1126P	SP1051
				
Page no.	P.11	P.11	P.11	P.11
Positions	3P	6P	6P	-
Faceplate	1.2mm Coated Aluminum	1.2mm Coated Aluminum	1.2mm Coated Aluminum	1.2mm Coated Aluminum
Circuit Protection	Fuses	Fuses	Circuit breakers	-
Switch Rating	DC 12V 10A	DC 12V 10A	DC 12V 10A	DC 12V 10A
Panel Rating	20A	20A	20A	20A
IP Rating	-	-	-	-
Dimensions (W x H x D)	117x97x70 mm	117x167x70 mm	117x167x70 mm	85x64x50 mm
Note				Battery Test Gauge panel with switch

Product	SP2013F	SP2016F	SP2211	SP2221AF/BF
				
Page no.	P.11	P.11	P.12	P.12
Positions	3P	6P	1P	1P
Faceplate	Bakelite	Bakelite	Aluminum Plate	Plastic (ABS)
Circuit Protection	Fuses	Fuses	-	Fuses
Switch Rating	DC 12V / 24V	DC 12V / 24V	DC 12V	DC 12V
Panel Rating	15A	15A	15A	5A
IP Rating	-	-	-	-
Dimensions (W x H x D)	114x92x35 mm	114x161x35 mm	52x76x35 mm	90x50x45 mm
Note				

Product	SP3114P	SP3116P	SP3013F	SP3013P
				
Page no.	P.12	P.12	P.13	P.13
Positions	4P	6P	3P	3P
Faceplate	Streamline Shaped plastic (ABS)	Streamline Shaped plastic (ABS)	2.54mm Coated Aluminum	2.54mm Coated Aluminum
Circuit Protection	Circuit breakers	Circuit breakers	Fuses	Circuit breakers
Switch Rating	DC 12V 20A / DC 24V 10A	DC 12V 20A / DC 24V 10A	DC 12V 16A	DC 12V 16A
Panel Rating	45A	45A	35A	35A
IP Rating	IP66	IP66	IP55	IP55
Dimensions (W x H x D)	133x121x75 mm	133x173x75 mm	134x95x75 mm	134x95x75 mm
Note				

Product	SP3016F	SP3016P	SP3023F	SP3023P
				
Page no.	P.13	P.13	P.13	P.13
Positions	6P	6P	3P	3P
Faceplate	2.54mm Coated Aluminum	2.54mm Coated Aluminum	2.54mm Coated Aluminum	2.54mm Coated Aluminum
Circuit Protection	Fuses	Circuit breakers	Fuses	Circuit breakers
Switch Rating	DC 12V 16A	DC 12V 16A	DC 12V 16A	DC 12V 16A
Panel Rating	35A	35A	35A	35A
IP Rating	IP55	IP55	IP55	IP55
Dimensions (W x H x D)	134x190x75 mm	134x190x75 mm	134x190x80 mm	134x190x80 mm
Note			with DIN Socket, Cig. Lighter Socket with Retainer and Battery Gauge	with DIN Socket, Cig. Lighter Socket with Retainer and Battery Gauge

Product	SP3033F	SP3033P	SP4010 / SP4011
			
no.	P.13	P.13	P.13
Positions	3P	3P	-
Faceplate	2.54mm Coated Aluminum	2.54mm Coated Aluminum	Nylon 66
Circuit Protection	Fuses	Circuit breakers	-
Switch Rating	DC 12V 16A	DC 12V 16A	DC 12V
Panel Rating	35A	35A	10A
IP Rating	IP55	IP55	-
Dimensions (W x H x D)	134x190x80 mm	134x190x80 mm	69x69x45 mm
Note	with Cig. Lighter Socket and Battery Gauge	with Cig. Lighter Socket and Battery Gauge	

Battery Management

Watch Intro Video on Youtube





BM Series - Main Battery Switches (Imperial Threading)

IGNITION
PROTECTED



BF446/BF446A Battery Main Switch (A: with AFD) (ON-OFF)

BF447/BF447A Battery Selector Switch (A: with AFD) (1-2-Both-OFF)

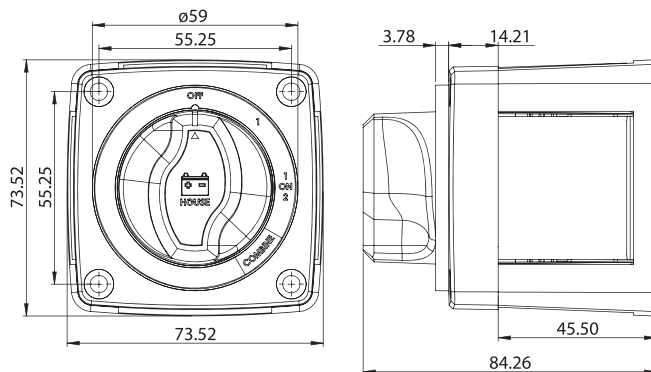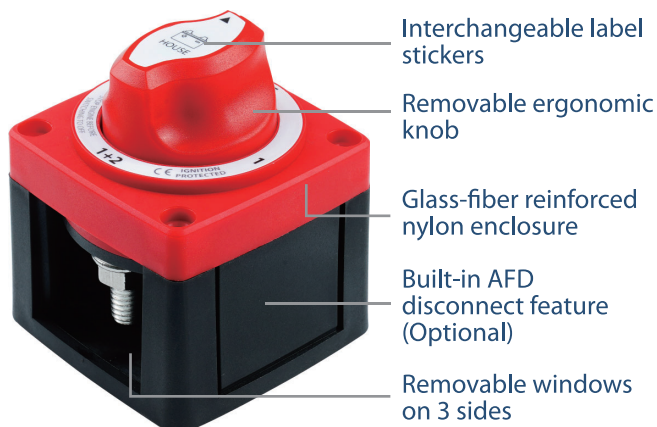


Features

- Unique ergonomic and aesthetic knob design
- Knobs removable for isolation / safety
- AFD (Alternator Field Disconnect) feature provides extra safety protection
- Dimensions fits popular BlueSea's M-series battery switches
- Robust Glass Fiber reinforced Nylon enclosure
- Removable windows for unobstructed wiring
- 3 mounting options: Surface mount, front panel mount and rear panel mount
- Meet Ignition Protection Standard (ISO8846 / SAE J1171), suitable for use in marine engine room and fuel tank spaces

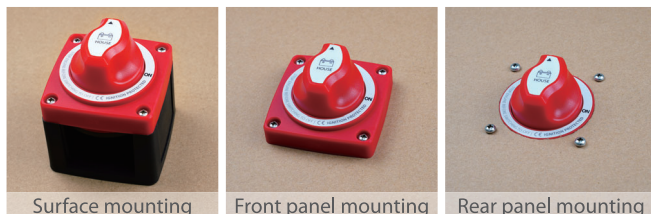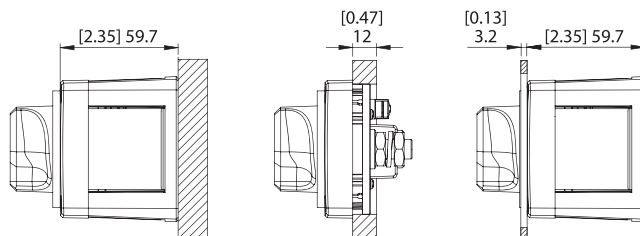

Product Series

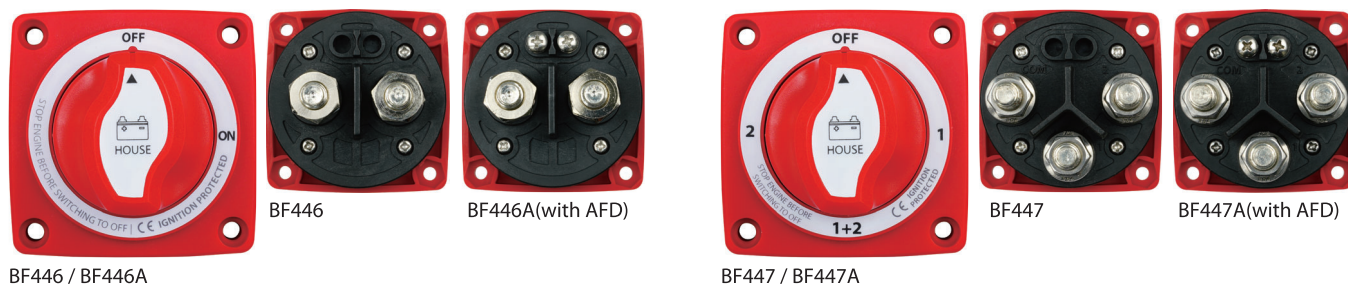

Product ID	Function	Voltage Rating (Max)	Stud Size	Cranking Rating(30s)	Intermittent Rating (5 mins)	Continuous Rating (1hr)	Note
BF446	ON-OFF	48V	3/8"-16	900A	500A	300A	-
BF446A	ON-OFF	48V	3/8"-16	900A	500A	300A	with AFD
BF447	1-2-Both-OFF	32V	3/8"-16	900A	500A	300A	-
BF447A	1-2-Both-OFF	32V	3/8"-16	900A	500A	300A	with AFD



BP Series - Compact Battery Switches (Metric Threading)






Best
SellerIGNITION
PROTECTEDPATENTED
TW,CH

Battery Main Switch (On-Off)

BF441 / BF441A (with AFD)


Battery Selector Switch (1-2-Both-Off)

BF442 / BF442A (with AFD)

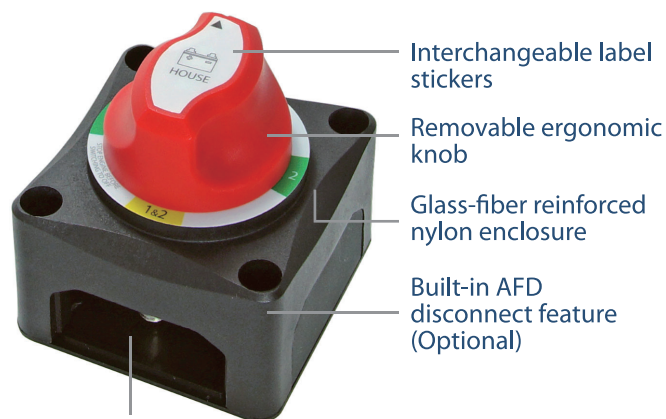
Removable windows
on 4 sides

Features

- Unique ergonomic and aesthetic knob design
- Knobs removable for isolation / safety
- Smallest battery switch with AFD (Alternator Field Disconnect) feature in market (BF441A, BF442A)
- Dimensions fits Heavy Duty Modular Fuse Box Series (BF43x)
- Robust Glass Fiber reinforced Nylon enclosure
- Removable windows for unobstructed wiring
- Compact size matching mainstream products in market (BEP style)
- Surface or panel mount options provides flexibility when installing
- Patented in Taiwan(D183413), China(ZL201730358133.0)
- Meet Ignition Protection Standard (ISO8846 / SAE J1171), suitable for use in marine engine room and fuel tank spaces
- IP66 – Protected against powerful water jets from all directions

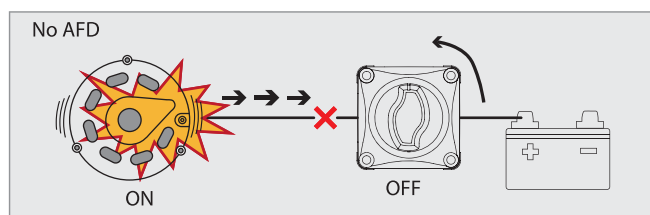

Continuous output blows out the alternator.

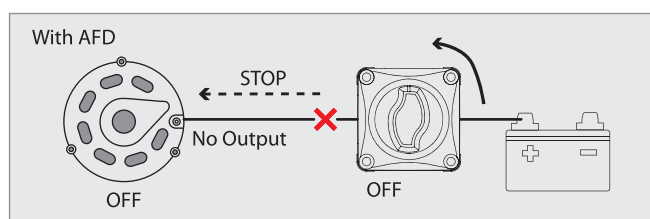

AFD cuts alternator off before battery switch turned off.

Product Series



BF441 / BF441A



BF441



BF441A(with AFD)



BF442 / BF442A



BF442



BF442A(with AFD)

Product ID	Function	Voltage Rating (Max)	Stud Size	Cranking Rating (10Secs)	Intermittent Rating (5 mins)	Continuous Rating (1hr)	Note
BF441	ON-OFF	48V	M10	1250A	455A	275A	-
BF441A	ON-OFF	48V	M10	1250A	455A	275A	with AFD
BF442	1-2-Both-Off	48V	M8	1000A	300A	200A	-
BF442A	1-2-Both-Off	48V	M8	1000A	300A	200A	with AFD

BE Series - Standard Size Battery Switches (Imperial / Metric Threading)

PATENTED
Pending


IGNITION
PROTECTED

Battery Main Switch (On-Off)

BF443 / BF443A (with AFD)



Battery Selector Switch (1-2-Both-Off)

BF444 / BF444A (with AFD)

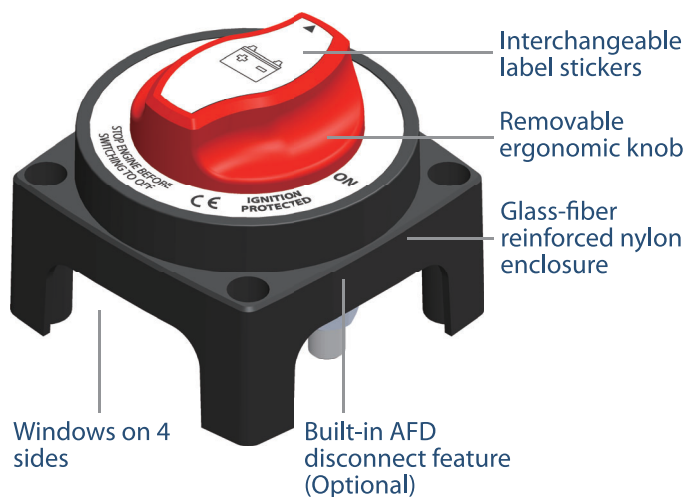


Features

- Market leading 400A Continuous rating
- Unique ergonomic and aesthetic knob design
- Knobs removable for isolation / safety
- AFD (Alternator Field Disconnect) feature provides extra safety protection
- Dimensions fits popular BlueSea's e-series battery switches
- Robust Glass Fiber reinforced Nylon enclosure
- Windows on 4 sides for unobstructed wiring
- 2 mounting options: Surface mount and panel mount
- Meet Ignition Protection Standard (ISO8846 / SAE J1171), suitable for use in marine engine room and fuel tank spaces
- Patent Pending (TW & CH)

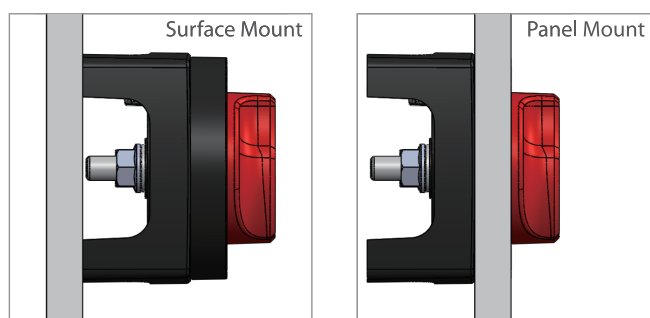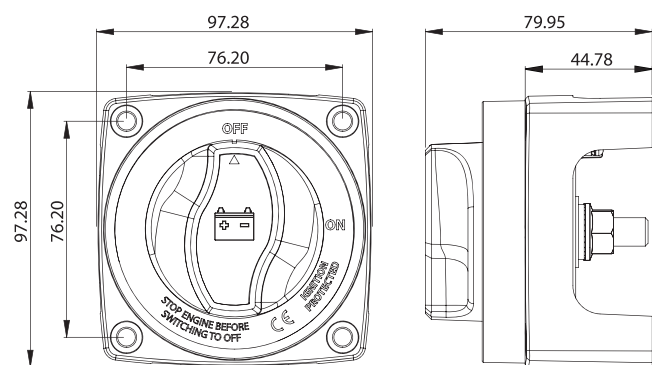

Product Series

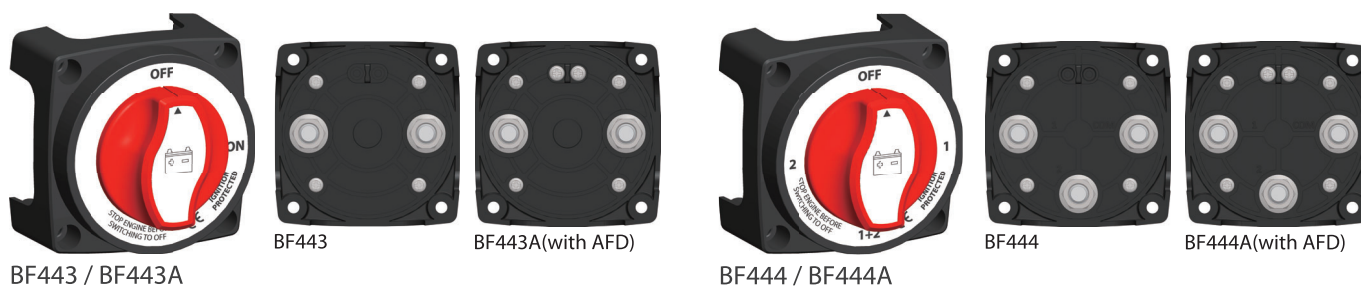


Product ID	Function	Voltage Rating (Max)	Stud Size	Cranking Rating (10Secs)	Intermittent Rating (5 mins)	Continuous Rating (1 hr)	Note
BF443	ON-OFF	48V	3/8"-16	1200A	600A	350A	-
BF443A	ON-OFF	48V	3/8"-16	1200A	600A	350A	with AFD
BF444	1-2-Both-Off	48V	3/8"-16	1200A	600A	350A	-
BF444A	1-2-Both-Off	48V	3/8"-16	1200A	600A	350A	with AFD

Mini Size 150A Battery Switch BF449

IGNITION
PROTECTED

Watch Intro Video on Youtube

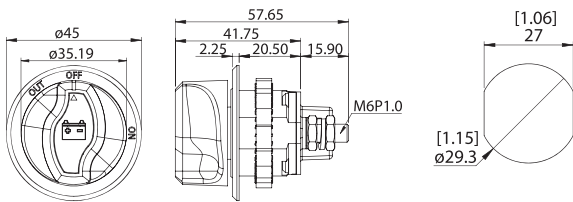

Features

- Unique ergonomic and aesthetic knob design
- Knobs removeable for isolation / safety
- Robust Glass Fiber reinforced Nylon enclosure
- Ultra compact size fits 1-1/8" mounting holes
- ISO8846 Ignition Protected


Specifications

- Cranking Rating (30 Secs) | 500A
- Intermittent Rating (5 mins) | 200A
- Continuous Rating | 150A
- Voltage Rating | 32V
- Terminal Studs | M6
- Note |

300A Battery Isolation Switch with removable key BF501 /BF501C (With Cocver)



BF501C

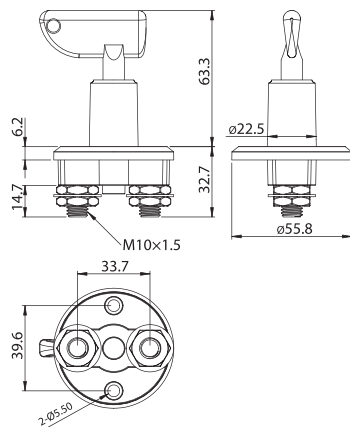

Features

- SPST ON-OFF
- Copper Studs and Contacts
- Keys Removable at OFF position


Specifications

- Rating | 12Volts DC
- Continuous Rating | 300Amps
- Intermittent Rating | 800Amps
- Note |

300A Battery Isolation Switch with removable key BF502 /BF502C (With Cocver)



BF502C

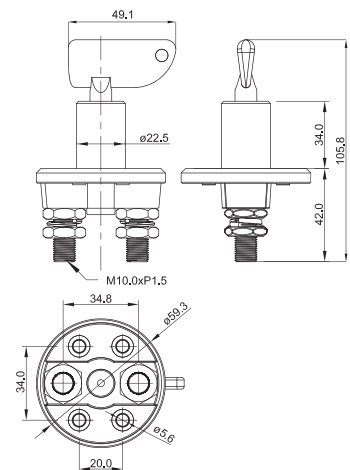

Features


- SPST ON-OFF
- Copper Studs and Contacts
- Keys Removable at OFF position
- 4 mounting screw holes version

Specifications

- Rating | 12Volts DC
- Continuous Rating | 300Amps
- Intermittent Rating | 800Amps
- Note |

Battery Isolation Switch

BF503

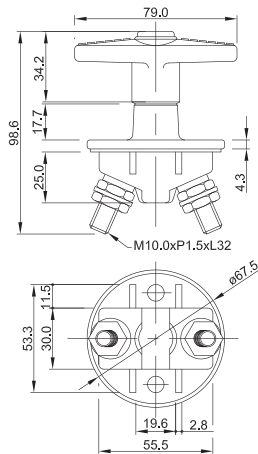

Features


- SPST ON-OFF
- Copper Studs and Contacts
- Heavy Duty T Handle Bar (not Removable)
- Zinc housing with coated white painting

Specifications

- Rating | 12Volts DC
- Continuous Rating | 300Amps
- Intermittent Rating | 800Amps
- Note |

Master Disconnect Switch replacing Caterpillar Cat 7N0718

BF504

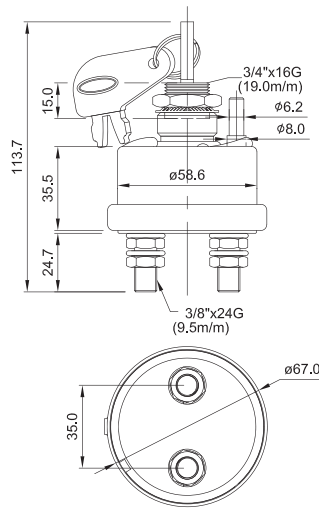

Features


- SPST ON-OFF
- Copper Studs and Contacts
- Indexing pins align switch and prevent housing from rotating
- Key is removable in the OFF position
- Two keys included
- OEM Parts for Caterpillar 7N-0718

Specifications

- Rating | 12Volts DC
- Momentary Rating | 450Amps
- Continual Rating | 250Amps
- Note |

Battery Isolation Switch

BF505 / BF506 (with AFD)



BF505

BF506

Features

- 2 Position Off-On
- Imperial stud terminals (3/8" -24G)
- Copper Contacts
- Die-casting molded housing
- AFD features prevents accidental cut-off (BF506)

Specifications

- Rating | 6-12Volts DC
- Continual Rating | 250Amps
- Momentary Rating | 450Amps
- Mounting Stem | 3/4"(19.05mm) Diameter
- Note |





Digital Voltage Sensitive Relay (DVSR) / Automatic Charging Relay (ACR)

**IGNITION
PROTECTED**


BF454



BF454R



Features

- New Easy-to-Configure Wiring Design allowing easy configuration without wire peeling or cutting silicon sealing
- Automatically combines two batteries when charging and isolates the two batteries when not charging
- DC 12/24V input auto ranging
- Dual port sensing - allowing charging batteries from either direction (starting engine or aux power)
- Ultra Low Stand-by Current (0.3mA) Comparing to Traditional VSR (about 5mA)
- Dimensions fits BF43x Fuse Boxes and Battery Switch, matching mainstream products in market (BEP style)
- Robust Glass Fiber reinforced Nylon enclosure
- Built-in LED indication (ON when VSR engages)
- Port for remote LED indicating VSR status (LED not included)
- Surface or panel mount options
- Optional Storage Mode allows zero power consumption when engine is off


Specifications

- Nominal Voltage | DC 12V / 24V Auto Detect
- Relay Operating Voltages |


	DC 12V	DC 24V
Combine	13.3V	26.6V
Open	12.8V	25.6V
Low Voltage Lockout	9.5V	19.0V
Over Voltage Lockout	16.0V	30.0V

- Current Rating | 125A Continuous / 140A Intermittent
- Power Consumption | 0.3mA (Standby) / 270mA (Engage) / 0mA (Storage Mode) (@12V)
0.35mA (Standby) / 170mA (Engage) / 0mA (Storage Mode) (@24V)
- Note | **CE** IP67 ISO8846 / SAE J1171 (Ignition Protected)


VSR (Voltage Sensitive Relay) are automatically controlled switches that allow two batteries to be combined when charging, and to be isolated when not charging and current is draining from one of the batteries. VSR helps reserve a fully charged battery at all time, and avoid the dead battery and towing on the sea. D-VSR is an upgraded Digital version of VSR with features like 12/24V system support, dual-port sensing, much lower standby power consumption and better reliability.

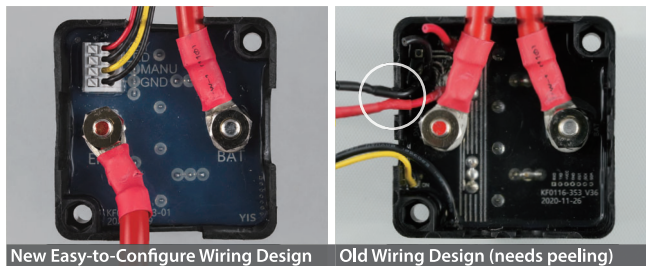

Wiring Example for BF454 D-VSR

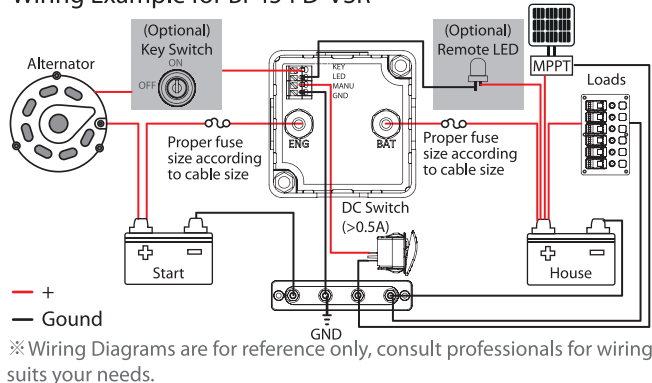

Wiring Example for D-VSR with Battery Charger

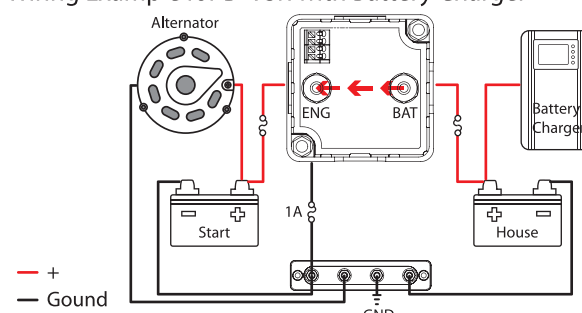

Dual Port Sensing allows Battery Charger charging to Start Battery when engine is off.


D-VSR with Cable Kit for 2nd Battery BF454KIT



This Kit provides all the necessary cables, accessories and D-VSR that you need to install the secondary battery. Customer installing this for the first time will find it convenient to have the cables ready in single package.



Digital Voltage Sensitive Relay (VSR) with Start Isolation

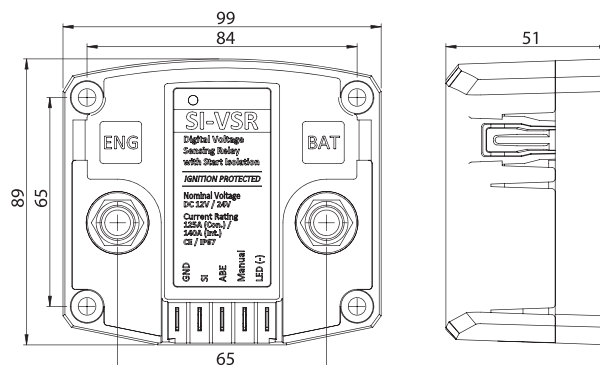**IGNITION
PROTECTED**
BF453 SI-VSR


BF453 is a higher end Voltage Sensing Relay (VSR) or Automatic Charging Relay (ACR) with more advanced features such as Start Isolation (SI), Auxiliary Battery Charging Extension (ABE) and Manual Override (ON & OFF) in addition to Dual Port Sensing and 12V / 24V Compatibility. This would allow BF453 to better protect the electronics loads in the house battery side and suits more dedicated needs. The upward studs (M10) and configuration terminals design also allows it to be more easily installed than traditional VSR.

Features

- Automatically combines two batteries when charging and isolates the two batteries when not charging
- DC 12/24V input auto ranging
- Sensing voltage from either battery bank
- Upward studs (M10) and configuration pins allows easier installation
- Robust Glass Fiber reinforced Nylon enclosure
- Built-in LED indication (ON when VSR engages)
- Port for remote LED indicating VSR status (LED not included)
- Optional Storage Mode allows zero power consumption when engine is off
- Optional Start Isolation forces to temporary isolate the connection during engine cranking to protect sensitive electronics in the house loads
- Optional Aux Battery Charging Extension (ABE) allows extra time charging 2nd battery when engine idling by dropping the open voltage to lower 12.25V
- Over and Under Voltage Lockup protects unintentional grounding of the battery positive


Specifications

- Nominal Voltage | DC 12V / 24V Auto Detect
- Combine / Open Voltage |

	DC 12V		DC 24V	
Combine	13.6V	30 sec.	27.2V	30 sec.
	13.0V	90 sec.	26.0V	90 sec.
Open	12.8V	30 sec.	25.5V	30 sec.
Open(ABE)	12.2V	30 sec.	24.5V	30 sec.


- Continuous Current Rating | 125A
- Intermittent Current Rating | 140A
- Power Consumption | 5mA (Standby) / 300mA (Engage) / 0mA (Storage Mode)
- Note | **CE** IP67 ISO8846/SAE J1171 (Ignition Protected)

Wiring Example for BF453 SI-VSR

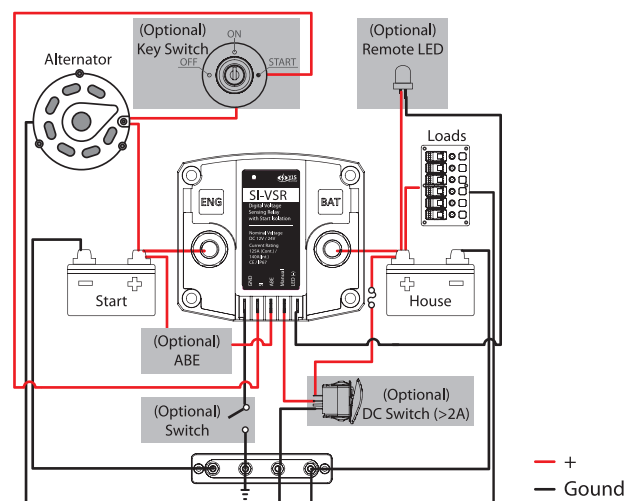

※ Wiring Diagrams are for reference only, consult professionals for wiring suits your needs.

Wiring Example for SI-VSR with Battery Charger


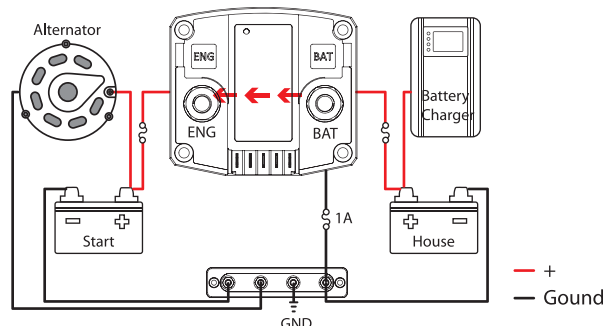


Dual Port Sensing allows Battery Charger charging to Start Battery when engine is off.

Low Voltage Disconnect

New Product IGNITION PROTECTED

BF455

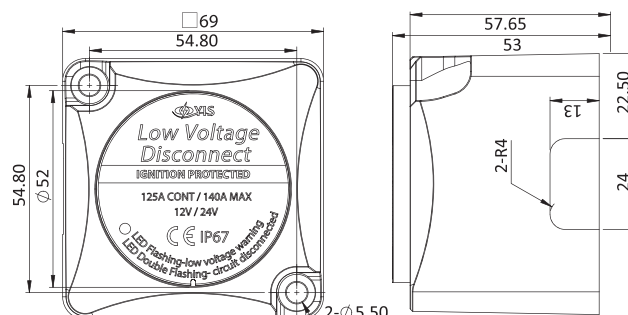

BF455 is designed to protect batteries from excessive discharge by automatically disconnecting non-essential loads when battery voltage drops below the preset level.

It is an ideal battery protection solution for single-battery boats, vehicles, caravans, RVs, and other DC power systems where maintaining enough battery power for engine starting or essential equipment is critical.

BF454 is designed to manage charging between two battery banks, and BF455 focuses on load protection. When the battery voltage becomes too low, the unit disconnects the connected load to help preserve battery capacity. Once the battery voltage recovers, the unit automatically reconnects the circuit.

With a compact and durable design, BF455 is suitable for harsh marine and vehicle environments. The waterproof housing, robust terminal design, and flexible mounting options make it easy to integrate into new or existing DC power systems.

Features

- Automatically disconnects non-essential loads when battery voltage is too low
- Helps preserve battery power for engine starting or critical equipment
- Suitable for single-battery boats, vehicles, caravans, RVs, and DC power systems
- DC 12/24V input auto ranging
- Built-in LED status indication (ON when low voltage and flashing when the circuit is disconnected)
- Optional remote switch for voltage setting, manual OFF, and temporary override function
- Optional alarm output for low-voltage warning before disconnection
- Automatic reconnection when battery voltage recovers
- Surface mount or panel mount installation options
- Rear insulating cover helps protect rear terminals
- Robust glass fiber reinforced nylon enclosure
- IP67 waterproof design for marine environments

Specifications

- Intermittent Rating | 5 min. 140A
- Nominal Voltage | DC 12V / 24V
- Continuous Current Rating | 125A
- Terminal Stud Size | M6
- Reconnect Voltage | DC 13V / 36V
- Optional Remote Control Switch Type | SPDT, Action: (ON)-OFF-(ON); () = momentary
- Disconnect Voltage | 11.3V-12.1V/22.6-24.2V Adjustable
- Time Delay to Alarm | Once the voltage falls below the set point, the LVD issues a warning after 5 minutes and disconnects the load 5 minutes afterward, with a total delay of 10 minutes.
- Compliance | CE / IP67 / ISO8846 / SAE J1171 (Ignition Protected)


Successful ODM Partnership Story



tigerExped is a German based company started in 2013 with the plan to offer the complete equipment for touring vehicles from a single source - from an empty panel van to a ready-to-travel campervan or expedition vehicle. Being long term real-life campervan travelers themselves, people in Tigerexped have a strong passion and belief to offer products that provide unique, truly useful and premium experience to the end users. YIS Marine has been a close partner with them since 2019. Together we have jointly developed several patent winning popular products yet to be seen elsewhere in the market.

Central Electrics "UFO" 400 & 200

Revolutionary round shaped multi-fuse power distribution hub" with 15 fuses (MEGA / MIDI / ATO) slots and integrated ground bus, total current up to 400A (UFO400) and 200A (UFO200). Integrated design saves up to 50% installation space and time.

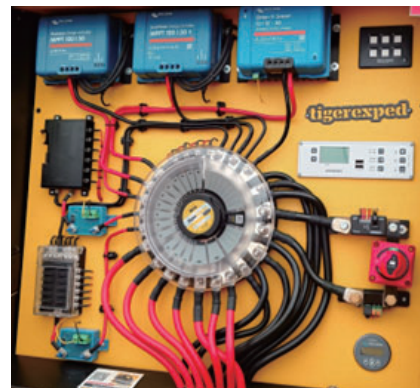


convertiger 100 – PD100W USB-C / USB-A Buck-Boost chargers

Market-leading PD100W (20V 5A output) USB charger with dual independent DCDC converters for A and C ports and a "Buck-Boost" step-up convertor ensuring 100W output even when input is 12V system. Compatible with popular RV sockets Inprojal & Berker frames and covers.



REMOTE PANEL – 6P and 10P smart panel with APP control

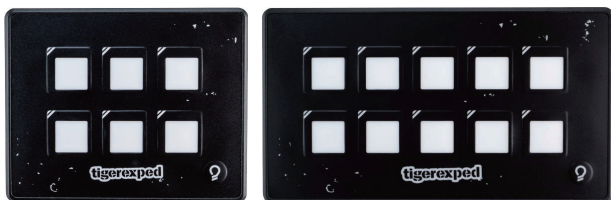


Customized version of smart remote switch panel with tigerexped outlook, stickers, packaging, custom app UI design and more unique features.

*UFO fuse blocks / convertiger / REMOTE PANEL are tigerexped branded products and are only available at www.tigerexped.de

ODM Service for Branded Customers

YIS Marins's experienced RD team and "Can-do attitude" has made countless back and forth discussions, modifications and testing process look easy and fluent. Our quality assurance system and manufacturing capabilities also made sure mass production went smooth without quality issues.

This is just one of many successful OEM/ODM stories between YIS Marine and our valued branded customers. If you are looking for a reliable, proven and responsible partner in marine / RV electrical systems, YIS Maine would be your ideal choice!

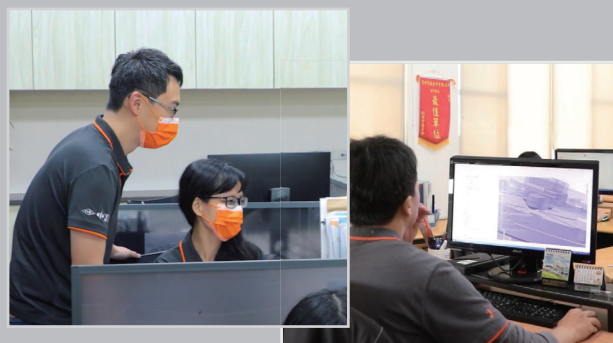

Modular Design Blade (ATO/ATC/ATP) Fuse Blocks


Best Seller PATENTED TW,CH

The BF27x series are compact and solid blade fuse blocks designed for 24-hour circuits. The fuse blocks come with blown fuse indication LEDs, clear cover with recessed areas for label stickers and are available in two versions with different terminals (screw or quick terminals).




Two Modules for all


YIS Marine exclusive modular design – two basic modules can be combined into 4 popular fuse blocks (and more depending on specific needs). The assembly is very simple and can be done by consumers alone (instruction manual included). This not only gives consumers flexibility to expand their current fuse block, but also allows retailers to save precious shelf space in the store.

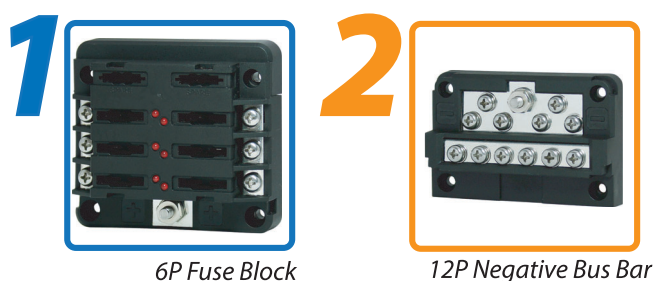


BF271 6P Fuse Block




BF273 6P Fuse Block with Negative Bus Bar

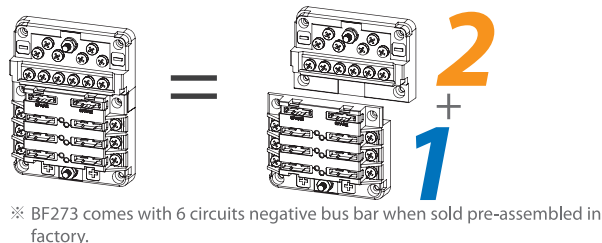


BF274 12P Fuse Block

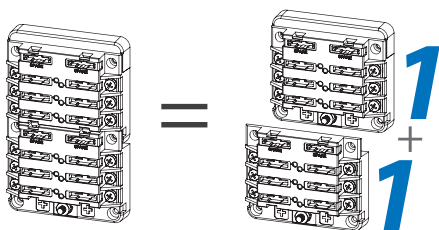

BF275 12P Fuse Block with Negative Bus Bar

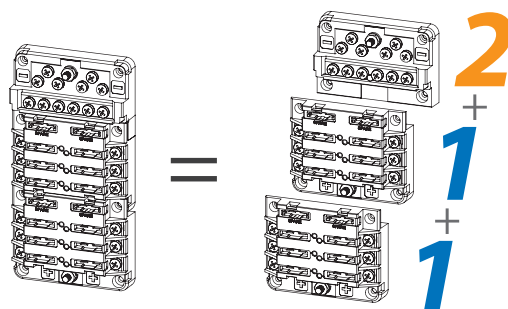



New Compact 2 in 1 model



BF276 2-in-1 Fuse Block in one piece



BF273A=BF271+BF272 (Modular Design)

- More compact and cost-effective model when you need negative bus bar pre-combined
- Size reduced by 19%, significant cost reduction
- Same design language with all same great features

Series Features

- Accepts Automotive Blade Fuses (ATC/ATO/ATP)
- Modular Design saves shelf space (2 items can be combined into 4 models)
- Transparent cover with recessed area for label stickers
- 60 pieces assorted label stickers set included
- Storage for 2 spare fuses (for each 6P block)
- LED indication of blown fuses

Specifications

- Voltage Rating | DC 32V Max
- Amp Rating per Branch | 30A (Screw Terminals) / 20A (Quick Terminals)
- Max Cumulative Amp | 100A per block
- Terminal Stud Size | M5 (3/16")
- Screw Size | M4 (5/32") (BF27x Only)
- Note | Patented in Taiwan(M490103) & China(ZL201420495842.4)

Product Series

Basic modules

The two basic module that can be combined into 4 models at end user's end



BF271 / BF281 (6P Fuse Blocks)



BF272 / BF282 (12P Negative Bus Bar)

Combined Models

Cost-effective combined Fuse Blocks with Negative Bus bar




BF276 / BF286 (6P fuse block + Neg. bus bar)



BF277 / BF287 (12P fuse block + Neg. bus bar)



BF278 / BF288 (12P fuse blocks)



BF277D (6P + 6P Split Bus Fuse Block)

Product ID	Terminals	Circuits	Negative Bus Bar	Product Dimensions (W x L x H)	Note
BF271	Screws (M4)	6	-	86 x 78 x 41 mm	6P Fuse block module
BF281	Quick (0.250")	6	-	86 x 78 x 41 mm	6P Fuse block module
BF272	Screws (M4)	-	12 Circuits	86 x 57 x 41 mm	12P Neg. bus bar module
BF282	Quick (0.250")	-	12 Circuits	86 x 57 x 41 mm	12P Neg. bus bar module
BF276	Screws (M4)	6	6 Circuits	85 x 93 x 36 mm	One-piece fuse block + neg. bus bar
BF286	Quick (0.250")	6	6 Circuits	85 x 93 x 36 mm	One-piece fuse block + neg. bus bar
BF277	Screws (M4)	12	12 Circuits	85 x 132 x 36 mm	One-piece fuse block + neg. bus bar
BF287	Quick (0.250")	12	12 Circuits	85 x 132 x 36 mm	One-piece fuse block + neg. bus bar
BF278	Screws (M4)	12	-	85 x 132 x 36 mm	One-piece fuse block
BF288	Quick (0.250")	12	-	85 x 132 x 36 mm	One-piece fuse block
BF277D	Screws (M4)	12	12 Circuits	85 x 158 x 36 mm	6P + 6P Split Bus Fuse Block + neg. bus bar

※ All models can also be sold without covers or without blown fuse indicating LEDs.


Multi-use Compact Modular Design Blade Fuse Blocks

PATENTED
TW,CH


The BF29x series is more compact and economical version of the popular BF27x series. It not only keeps BF27x series signature positive / negative modular design and LED fuse blown indication, but also equipped with new features like circuit breaker type fuse support (with patent pending cover design). The patent pending cover design allows shipping and packaging in compact size while expanding the cover height when required by reversing the cover 180 degrees. BF29x is suitable not only in marine but also in the car/caravan market as a lower-cost alternative to BF27 series.



Signature Positive / Negative Modular Design

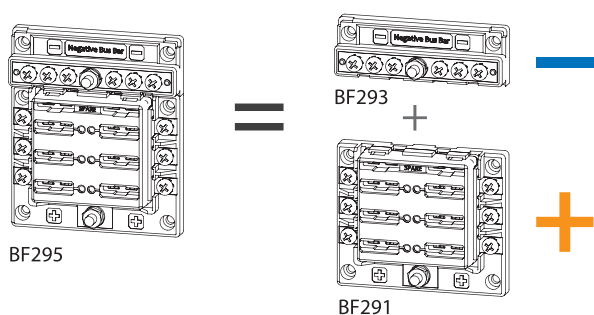

Patented dual-use cover design:

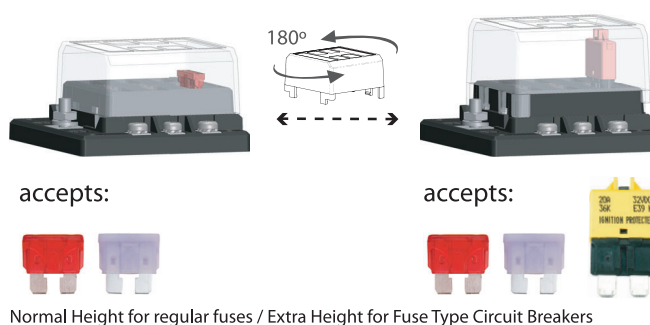

Features

- Accepts standard (ATC/ATO/ATP) blade fuses
- Modular positive and negative bus bar design
- Transparent cover with recessed area for label stickers
- 60 pieces assorted label stickers set included
- Storage for 2 spare fuses
- LED indication of blown fuses

Specifications

- Voltage Rating | DC 32V Max
- Amp Rating per Branch | 30A (Screw Terminals) / 20A (Quick Terminals)
- Max Cumulative Amp | 100A per block
- Terminal Stud Size | M5 (3/16")
- Screw Size | M4 (5/32") (BF29x Only)
- Note | Patented in Taiwan(M591252) & China(ZL 2020 2 0206415.5)



Product Series



BF291 / BF291Q



BF293



BF295 / BF295Q



BF292 / BF292Q



BF294 / BF294Q



BF296 / BF296Q

Product ID	Terminals	Circuits	Negative Bus Bar	Product Dimensions (W x L x H)	Note
BF291	Screws (M4)	6	-	85 x 72 x 40 mm	-
BF292	Screws (M4)	12	-	85 x 117 x 40 mm	-
BF293	Screws (M4)	-	6 Circuits	85 x 29.75 x 30.9 mm	Negative Bus Bar Module (6P)
BF294	Screws (M4)	-	12 Circuits	85 x 29.75 x 30.9 mm	Negative Bus Bar Module (12P)
BF295	Screws (M4)	6	6 Circuits	85 x 100 x 40 mm	Pre-assembled fuse block w/ bus bar
BF296	Screws (M4)	12	12 Circuits	85 x 145 x 40 mm	Pre-assembled fuse block w/ bus bar
BF291Q	Quick (0.250")	6	-	85 x 72 x 40 mm	-
BF292Q	Quick (0.250")	12	-	85 x 117 x 40 mm	-
BF294Q	Quick (0.250")	-	12 Circuits	85 x 29.75 x 25.2 mm	Negative Bus Bar Module (12P)*
BF295Q	Quick (0.250")	6	12 Circuits	85 x 100 x 40 mm	Pre-assembled fuse block w/ bus bar
BF296Q	Quick (0.250")	12	12 Circuits	85 x 145 x 40 mm	Pre-assembled fuse block w/ bus bar

*Quick terminal negative bus bar (BF294Q) comes without cover due to its upward terminal design; use screw terminal version (BF294) if cover is required.

Watch Video for More



How is YIS Marine BF29X series different from cheap products from Chinese Competitors?





Compact Design Independent Source Blade Fuse Blocks


PATENTED
TW

BF279 / BF289

Patented Dual-height
cover




Patented dual-use cover design

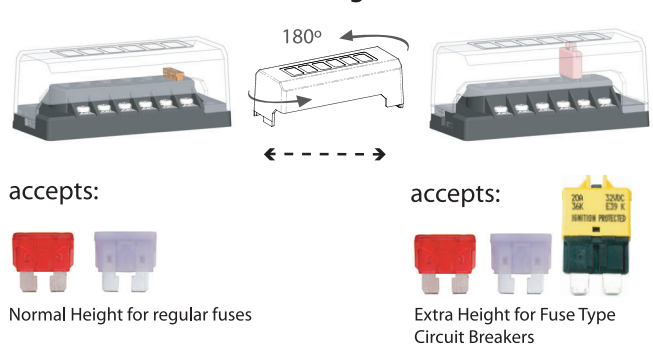

Normal Height for regular fuses

Extra Height for Fuse Type
Circuit Breakers

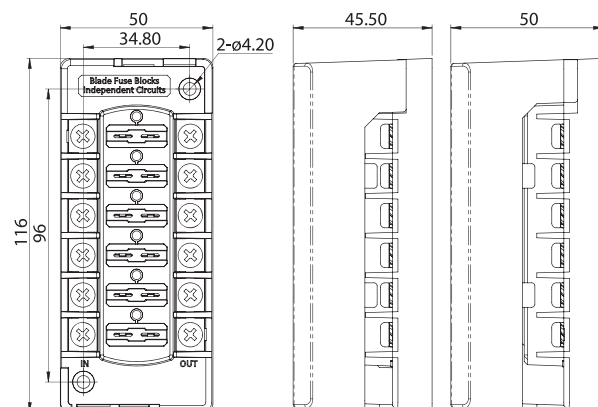


Features

- Ultra compact size 6 way independent source fuse block
- Can be used for switched circuits and 24-hour circuits in the same block
- Accepts standard (ATC/ATO/ATP) blade fuses
- Patented cover design supports circuit breaker type fuses with extra height
- Transparent cover with recessed area for label stickers
- 60 pieces assorted label stickers set included
- LED indication of blown fuses

Specifications

- Voltage Rating | DC 32V Max
- Amp Rating per Branch | 30A (BF279) / 20A (BF289)
- Max Cumulative Amp | 40A per jumper circuit group
- Screw Size | M4 (5/32") (BF279)
- Note | Patented in Taiwan(D214940)

BF279/BF289 Independent Source Fuse Block

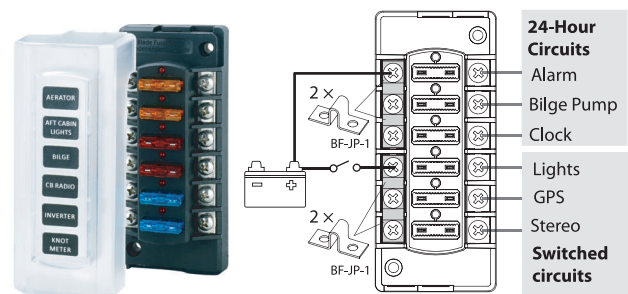

Can be flexibly divided into 24 hour circuits and switched circuits
* Jumpers are only available for Screw Terminals version (BF279)

Product Series



BF279 6P Screw Terminals

BF289 6P Quick Terminals



BF-JP-1 Jumper for BF279




CLB / CMB Circuit Breaker Boxes

BF221I(B) 6P Independent Source (B: with PVC Boot)

BF221C(B) 6P Common Source with Neg. Bus Bar (B: with PVC Boot)

Recessed area for label stickers

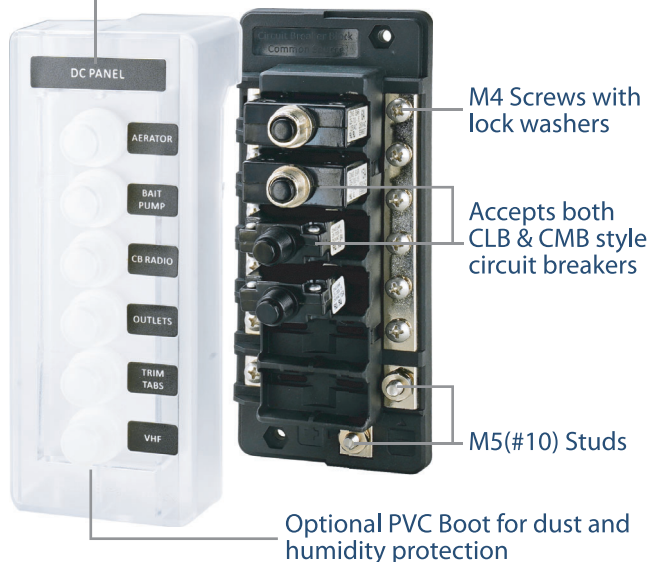

Features

- Install circuit breakers as easy as blade fuses
- Accepts both CLB & CMB circuit breakers
- 100A Positive Bus Bar with M5 (#10) Studs
- M4 (#8) screw terminals accepts ring terminals
- Transparent cover with recessed area for label stickers
- 60 pieces assorted label stickers set included
- Optional push button waterproof boots can be installed on cover

Specifications


- Voltage Rating | DC 32V Max
- Amp Rating per Branch | 30A
- Max Cumulative Amp | 100A per block
- Terminal Stud Size | M5 (3/16")
- Screw Size | M4 (5/32")
- Dimensions | 65.5 x 160 x 56 mm
65.5 x 160 x 73 mm (with PVC Boot)
- Note |

BF221C(B) 6P Common Source with Neg. Bus Bar (B: with PVC Boot)




One positive feed in, six protected output to devices

BF221I(B) 6P Independent Source (B: with PVC Boot)

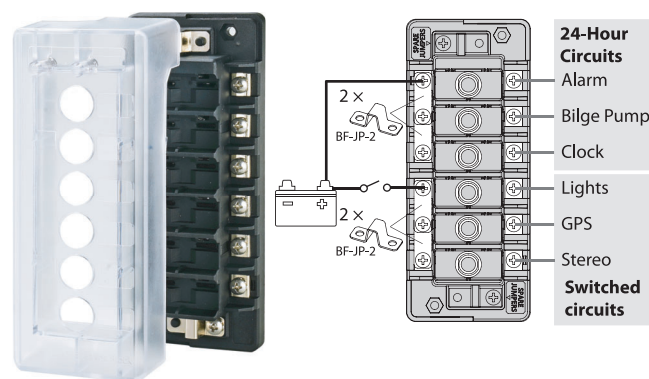

Can be flexibly divided into 24 hour circuits and switched circuits

Related Products






Modern Design Glass-tube AGC Fuse Blocks Series

PATENTED
TW,CH

BF210 / BF211 / BF212

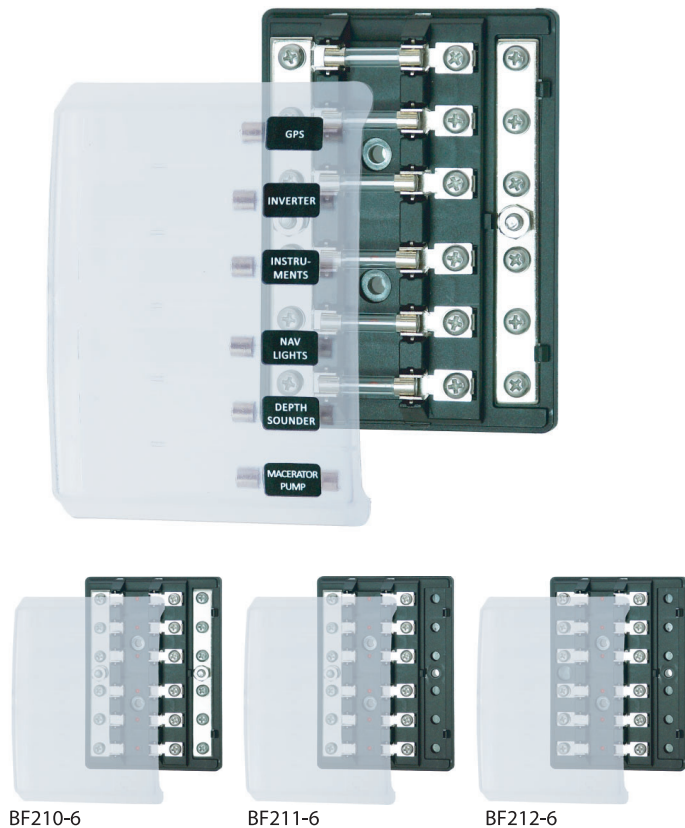

BF210-6

BF211-6

BF212-6

Product ID	Circuits	Positive Source	Negative Bus Bar	Product Dimensions	Note
BF210-6	6	Common Source	6 Circuits	129 x 91 mm	Common Source Fuse Block with Negative Bus Bar
BF211-6	6	Common Source	-	129 x 91 mm	Common Source Fuse Block
BF212-6	6	Independent Source	-	129 x 91 mm	Independent Source Fuse Block


Features

- LED indication of blown fuses
- Redesigned fuse clips hold fuses firmly and steadily
- Transparent cover with recessed area for label stickers and storage for 6 spare fuses
- 60 pieces label stickers included


Specifications

- Base Material | PBT, glass fiber reinforced
- Max Operating Voltage | 32V
- Amp Rating per Branch | 30A
- Max Cumulative Amp | 100A per block
- Screw Size | M4 (5/32")
- Terminal Stud Size | M5 (3/16")
- Note | Patented in Taiwan(D182308) & China(ZL201630425859.7)

* M4 screw is comparable to #8-32 screws and M5 stud is comparable to #10-32 Studs.





Storage for spare fuses



LED indication of blown fuses

Compact ANL Fuse Holder

BF461 / BF461-M8

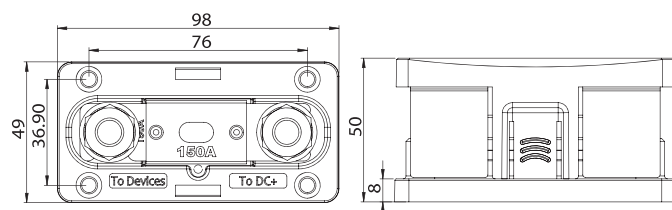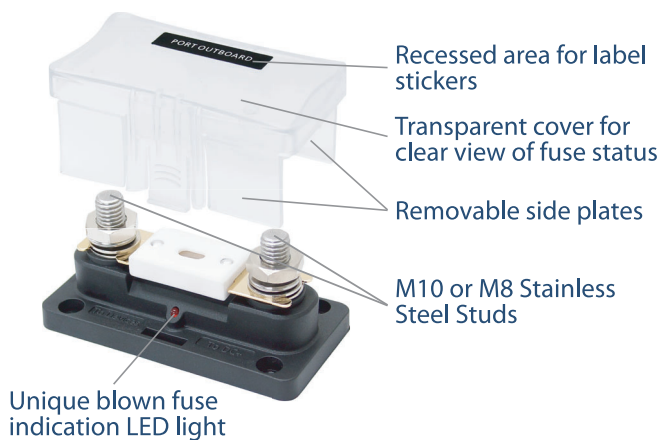

Features

- Accepts 35-300A ANL Fuses (not included)
- Compact size 49 x 98 x 50 (W x L x H) mm (including cover)
- Transparent cover for clear view of fuse status
- Cover with recessed area for label stickers (5 pcs assorted label stickers included)
- Bendable / removable side plates for flexible wiring
- Unique blown fuse indication LED light

Specifications

- Max Operation Voltage | DC 32V
- Max Continuous Current | 35-300A (fuse dependent)
- Terminal Stud Size | 2 x M10(3/8") (BF461)
2 x M8(5/16") (BF461-M8)










New
Product

MRBF Terminal Fuse Block

BF462 / BF462-M8

BF463 / BF463-M8



Features


- Accepts high-amp MRBF fuse—appropriate for inverter, windlass, bow thruster and DC main circuit protection
- Convenient and compact installation directly on battery studs
- Isolated stud design allowing stacking of M8 (5/16") ring terminals
- TPV Insulating cap preventing accidental shorts circuits
- Accepts M8 (5/16") ring terminal on top of fuse
- Mounts on M8 (5/16") or M10 (3/8") terminal studs
- MRBF fuses not included

Specifications

- Max Operation Voltage | DC 58V
- Max Continuous Current | 30-300A (fuse dependent)
- Terminal Stud Size | M10 (3/8") - BF462 / BF463
M8 (5/16") - BF462-M8 / BF463-M8



Extended Cap neck for easier cover and removal

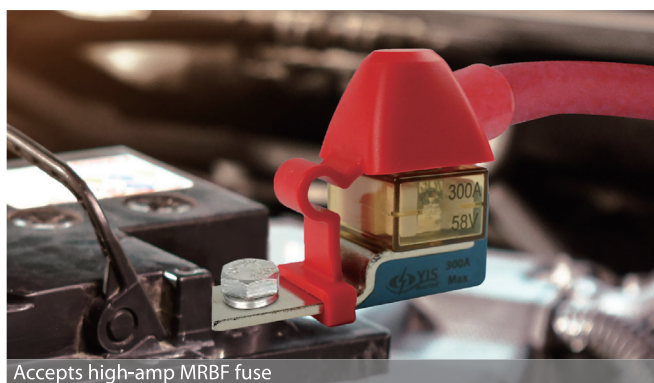

Accepts high-amp MRBF fuse




Ultra soft durable TPV Material




Heavy-Duty Modular Design Fuse Block & Bus Bars

Module box design for clean, neat and easy wiring configurations

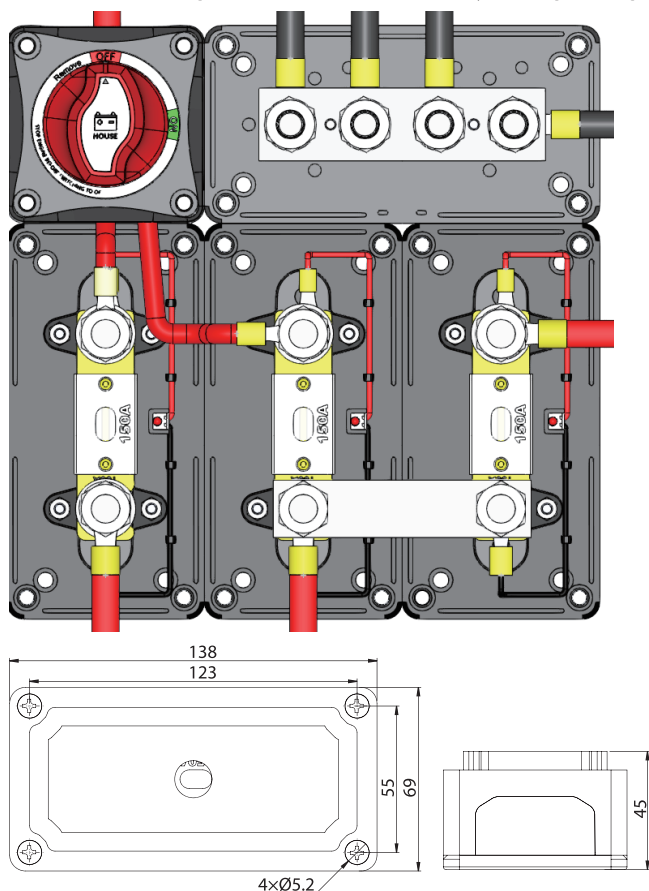

Features

- Module box design for easy wiring configurations
- Robust Glass Fiber reinforced Nylon enclosure
- All models are of the same dimensions (see below)
- 6 removable windows at 4 directions
- Blank write-on space on the top allows easy labeling
- Complete product line including fuse blocks, bus bars and terminal studs

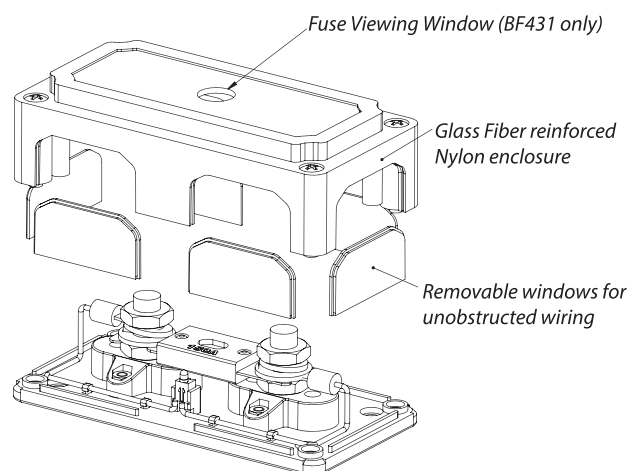

Module Design ANL Fuse Box

BF431 Heavy-Duty Modular Design ANL Fuse Box

BF431S Heavy-Duty ANL Fuse Box with Additional Cable Connection Studs



BF431

- Withstands high currents between 100-300A ANL Fuses (not included)
- Open window on the top for clear vision of blown fuse
- LED indication of blown fuse condition (turns on when fuse blows)

Specifications

- Max Operating Voltage | DC 32V
- Max Continuous Amp | 35-300A (determined by fuse)
- Terminal Stud Size | 2 x M10 (3/8")



BF431S

- Additional studs with heavy duty oxygen-free copper bus bar
- Withstands high currents up to 750A ANL Fuses (not included)
- Open window on the top for clear vision of blown fuse
- LED indication of blown fuse condition (turns on when fuse blows)

Specifications

- Bus Material | Oxygen-free Copper, Nickel plated
- Max Operating Voltage | DC 32V
- Max Continuous Amp | 35-750A (determined by fuse)
- Terminal Stud Size | 4 x M10 (3/8")

Heavy Duty Bus Bar Box

BF432 / BF432-M8 Heavy-Duty Module Design Bus Bar Box with 4 Terminal Studs



- Highest amperage rated bus bar (300A) with M10 terminal studs (also available in M8)
- Blank write-on space on the top allows easy labeling for each branch

Specifications

- Bus Material | Brass, Nickel plated
- Max Operating Voltage | DC 70V
- Max Continuous Amp | 300A
- Terminal Stud Size | 4 x M10 (3/8") (BF432) / 4x M8 (5/16") (BF432-M8)

Heavy Duty Bus Bar Box

BF433 Heavy-Duty Module Design Bus Bar Box with 2 x M10 Terminal Studs & 6 x M5 Screws



- Highest amperage rated bus bar (300A) with M10 terminal studs
- Blank write-on space on the top allows easy labeling for each branch

Specifications

- Bus Material | Brass, Nickel plated
- Max Operating Voltage | DC 70V
- Max Continuous Amp | 300A
- Terminal Stud Size | 2 x M10 (3/8")
- Screw Size | 6 x M5 (3/16")

Heavy Duty Dual Bus Bar Box

BF434 Heavy-Duty Modular Design Dual Bus Bars with Connecting Link



- Dual Bus Bar with removable connecting link
- Nickel plated brass bus bar allowing current up to 100A
- Blank write-on space on the top allows easy labeling for each branch

Specifications

- Bus Material | Brass, Nickel plated
- Max Operating Voltage | DC 70V
- Max Continuous Amp | 100A
- Terminal Stud Size | 4 x M6 (1/4")
- Screw Size | 12 x M4 (5/32")

4 Way Heavy-Duty Terminal Studs Box

BF435 Heavy-Duty Modular Design Terminal Studs with Insulation Partition



- Allow terminating of heavy-duty cables for one or more connections (each terminal)
- Removable insulation partition included
- Heavy duty terminal studs (up to M10), allowing current up to 200A (rating determined by wires connected)
- Terminal Studs available in M8 or M10 (Default: M10)
- Blank write-on space on the top allows easy labeling for each branch

Specifications

- Max Operating Voltage | DC 48V
- Max Amp per circuit | Determined by wires connected
- Terminal Stud Size | 4 x M10 (3/8")

Classic Fuse Block & Bus Bars

Common Source AGC Fuse Blocks

BF201(2P-12P)



Dimensions	
Product ID	Dimensions (H x W)
BF201-2P	57 x 31 mm
BF201-4P	57 x 62 mm
BF201-6P	57 x 93 mm
BF201-8P	57 x 126 mm
BF201-10P	57 x 157 mm
BF201-12P	57 x 188 mm

Specifications

- Base Material | ABS + Glass Fiber
- Clip Material | Brass
- Max Operating Voltage | DC 32V
- Max Amp per circuit | 20A
- Max Cumulative Amp | 60A
- Screw Size | M5 x P0.8 x 6

Reinforced Nylon Base Glass-tube AGC Fuse Blocks

BF202 / BF205 / BF206 (4P, 6P, 8P)



Product ID	BF202	BF206	BF205
Description	Common Source Fuse Block with Negative Bus	Common Source Fuse Block	Independent Source Fuse Block
Positive Source	Common Source	Common Source	Independent Source
Negative Bus Bar	Yes	None	None
Max Cumulative Amp	80A	50A	-
Dimensions (L x W)			
4P	84 x 76 mm	62 x 76 mm	62 x 76 mm
6P	84 x 114 mm	62 x 114 mm	62 x 114 mm
8P	84 x 152 mm	62 x 152 mm	62 x 152 mm

Specifications

- Base Material | Nylon, Glass Fiber reinforced
- Clip Material | Brass
- Max Operating Voltage | DC 32V
- Max Amp per circuit | 20A
- Max Cumulative Amp | See each model
- Screw Size | No.8-32 x 1/4

Bus Bars

Dual Bus Bars

BF204(4P-8P)



Dimensions	
Product ID	Dimensions (H x W)
BF204-4P	38 x 76 mm
BF204-6P	38 x 114 mm
BF204-8P	38 x 152 mm

Specifications

- Base Material | Nylon, Glass Fiber reinforced
- Bus Material | Brass
- Max Operating Voltage | DC 32V
- Max Cumulative Amp | 60A for each bus
- Screw Size | No.8-32x1/4

Large Current Bus Bar

BF207 (10P)



Specifications

- Base Material | PBT, Glass Fiber reinforced
- Bus Material | Copper, Brass-plated
- Max Operating Voltage | DC 48V
- Max Cumulative Amp | 150A
- Screw Size | No.8-32 x 1/4
- Terminal Stud Size | M6 x 25mm
- Dimensions (L x W) | 146 x 31.5mm

58V Fuse Application




Unlike most blade fuses rated at only 32V for 12V/24V systems, our 58V blade fuse series supports up to 58V DC, making it ideal for modern 42V architectures and selected 48V battery applications within safe voltage limits. It is well suited for commercial vehicles, trucks, buses, construction equipment, AGVs, robots, and marine accessories. Available in multiple sizes and current ratings, the series offers enhanced voltage capability, flexible application coverage, easy replacement, and reliable circuit protection. It is also compatible with sealed fuse holders, ensuring stable performance in harsh, wet, dusty, and high-vibration environments.

MAXI / ATX – Heavy-duty Blade Fuses 58V F-ATXH-XXA

New
Product




- Voltage Rating: DC 58V
- Interrupting Rating: 1000A @ 58V Max
- Transparent body for easy indication of blown fuse



Product ID	Amps	Color Coding
F-ATXH-20A	20 A	Yellow
F-ATXH-30A	30 A	Lt. Green
F-ATXH-40A	40 A	Orange
F-ATXH-50A	50 A	Red
F-ATXH-60A	60 A	Lt. Blue
F-ATXH-70A	70 A	Tan
F-ATXH-80A	80 A	Natural
F-ATXH-100A	100 A	Purple

ATO/ATC/ATP – Standard Blade Fuses 58V F-ATPH-XXA

New
Product




Product ID	Amps	Color Coding
F-ATPH-3A	3 A	Violet
F-ATPH-4A	4 A	Pink
F-ATPH-5A	5 A	Tan
F-ATPH-7.5A	7.5 A	Brown
F-ATPH-10A	10 A	Red
F-ATPH-15A	15 A	Blue
F-ATPH-20A	20 A	Yellow
F-ATPH-25A	25 A	Natural
F-ATPH-30A	30 A	Green
F-ATPH-40A	40 A	Amber

- Voltage Rating: DC 58V
- Interrupting Rating: 1000A @ 58V Max
- Transparent body for easy indication of blown fuse

ASP/ATM/Mini – Mini Blade Fuses 58V F-ATMH-XXA

New
Product



Product ID	Amps	Color Coding
F-ATMH-2A	2 A	Gray
F-ATMH-3A	3 A	Violet
F-ATMH-4A	4 A	Pink
F-ATMH-5A	5 A	Tan
F-ATMH-7.5A	7.5 A	Brown
F-ATMH-10A	10 A	Red
F-ATMH-15A	15 A	Blue
F-ATMH-20A	20 A	Yellow
F-ATMH-25A	25 A	Natural
F-ATMH-30A	30 A	Green

- Compact size
- Voltage Rating: DC 58V
- Interrupting Rating: 1000A @ 58V Max
- Transparent body for easy indication of blown fuse

Dual-Purpose Fuse Tester/Puller



F-FT-1



- Indicating Green LED for easy identification of blown fuse in fuse box
- Adjustable probe pitch allowing test on fuses of different sizes: MAXI, ATO/ATC, ATM
- Fuse puller for easy removal of blown fuse





MAXI / ATX – Heavy-duty Blade Fuses



Product ID	Amps	Color Coding
F-ATX-20A	20 A	Yellow
F-ATX-30A	30 A	Green
F-ATX-40A	40 A	Orange
F-ATX-50A	50 A	Red
F-ATX-60A	60 A	Blue
F-ATX-70A	70 A	Tan
F-ATX-80A	80 A	Natural

- Heavy-duty blade fuse protects circuits up to 80A
- Voltage Rating: DC 32V
- Transparent body for easy indication of blown fuse
- Optional gold plated terminals available



MAXI / ATX – Heavy-duty Blade Fuses with Blown Indication Lamp



Product ID	Amps	Color Coding
F-ATXL-20A	20 A	Yellow
F-ATXL-30A	30 A	Lt. Green
F-ATXL-40A	40 A	Orange
F-ATXL-50A	50 A	Red
F-ATXL-60A	60 A	Lt. Blue
F-ATXL-70A	70 A	Tan
F-ATXL-80A	80 A	Natural
F-ATXL-100A	100 A	Purple

- Voltage Rating: DC 32V
- Transparent body for easy indication of blown fuse
- Indicating lamp lights up when fuse is blown


ATO/ATC/ATP – Standard Blade Fuses



Product ID	Amps	Color Coding
F-ATP-1A	1 A	Black
F-ATP-2A	2 A	Gray
F-ATP-3A	3 A	Violet
F-ATP-4A	4 A	Pink
F-ATP-5A	5 A	Tan
F-ATP-7.5A	7.5 A	Brown
F-ATP-10A	10 A	Red
F-ATP-15A	15 A	Lt. Blue
F-ATP-20A	20 A	Yellow
F-ATP-25A	25 A	Natural
F-ATP-30A	30 A	Lt. Green

- Voltage Rating: DC 32V
- Transparent body for easy indication of blown fuse


ATO/ATC/ATP Fuses – Standard Blade Fuses with Blown Indication Lamp



Product ID	Amps	Color Coding
F-ATPL-3A	3 A	Violet
F-ATPL-4A	4 A	Pink
F-ATPL-5A	5 A	Tan
F-ATPL-7.5A	7.5 A	Brown
F-ATPL-10A	10 A	Red
F-ATPL-15A	15 A	Lt. Blue
F-ATPL-20A	20 A	Yellow
F-ATPL-25A	25 A	Natural
F-ATPL-30A	30 A	Lt. Green

- Voltage Rating: DC 32V
- Transparent body for easy indication of blown fuse
- Indicating lamp lights up when fuse is blown


ASP/ATM/Mini – Mini Blade Fuses



Product ID	Amps	Color Coding
F-ATM-2A	2 A	Gray
F-ATM-3A	3 A	Violet
F-ATM-4A	4 A	Pink
F-ATM-5A	5 A	Tan
F-ATM-7.5A	7.5 A	Brown
F-ATM-10A	10 A	Red
F-ATM-15A	15 A	Lt. Blue
F-ATM-20A	20 A	Yellow
F-ATM-25A	25 A	Natural
F-ATM-30A	30 A	Lt. Green

- Compact size
- Voltage Rating: DC 32V
- Transparent body for easy indication of blown fuse

ASP/ATM/Mini – Mini Blade Fuses with Blown Indication Lamp




Product ID	Amps	Color Coding
F-ATML-3A	3 A	Violet
F-ATML-4A	4 A	Pink
F-ATML-5A	5 A	Tan
F-ATML-7.5A	7.5 A	Brown
F-ATML-10A	10 A	Red
F-ATML-15A	15 A	Lt. Blue
F-ATML-20A	20 A	Yellow
F-ATML-25A	25 A	Natural
F-ATML-30A	30 A	Lt. Green

- Voltage Rating: DC 32V
- Transparent body for easy indication of blown fuse
- Indicating lamp lights up when fuse is blown

Other Fuses

ANL Fuses– Fuses for high amperage applications

IGNITION
PROTECTED

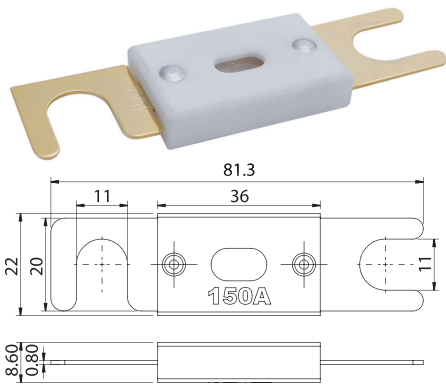

Electrical characteristics	
% of Amp. Rating	Blowtime
100% Rating	4 Hours,Minimum
150% Rating	60 Sec.,Minimum
200% Rating	15 Sec.,Minimum

- Body Material: See Below
- Metal Element: Brass, Gold Plated
- Voltage: 32V DC
- Ignition Protected (ISO8846) model available at extra cost

Product ID	Amps	Body Material
F-ANL-35A	35A	Nylon + Glass Fiber
F-ANL-50A	50 A	Nylon + Glass Fiber
F-ANL-70A	70 A	Nylon + Glass Fiber
F-ANL-100A	100 A	Ceramic
F-ANL-150A	150 A	Ceramic
F-ANL-200A	200 A	Ceramic
F-ANL-250A	250 A	Ceramic
F-ANL-300A	300 A	Ceramic
F-ANL-350A	350 A	Ceramic
F-ANL-400A	400 A	Ceramic



Standard Version



ISO8846 Certified Version (Fully Potted)

MIDI Compatible Bolt-Down Fuses
F-MID-XXA

New
Product



- Fuse Material: Copper
- Plating Material: Au / Ni Plated (two options)
- Voltage Rating: 32V DC / 58V DC (two options)
- Available Rating: 30-200A
- Mounting Hole Size: 5.5mm

MEGA Compatible Bolt-Down Fuses
F-MEG-XXA

New
Product



- Fuse Material: Copper
- Plating Material: Au / Ni Plated (two options)
- Voltage Rating: 32V DC / 70V DC (two options)
- Available Rating: 40-500A
- Mounting Hole Size: 8.5mm

MIDI Compatible Bolt-Down Fuse
with Indication LED
F-MIDL-XXA

New
Product



- Body Material: Copper
- Plating Material: Au / Ni Plated (two options)
- Voltage Rating: 32V DC
- Amperage Rating: 30-200A
- Mounting Hole Size: 5.5mm

Glass-tube Fuses



JMC / JTG Fuses | Japanese standard size 6.3 x 30mm glass-tube fuses

- Max. Voltage: DC 32V, AC 250V
- Amps: 0.1A-30A

GMA / GTE Fuses | Mini size glass-tube fuses (5 x 20mm)


- Max. Voltage: AC 250V
- Amps: 0.1A-20A

Circuit Breakers

Single Pole Thermal Circuit Breaker

CB-E95/E98 Manual Reset

CB-E96/E99 Switchable Reset (Manual ON-OFF)

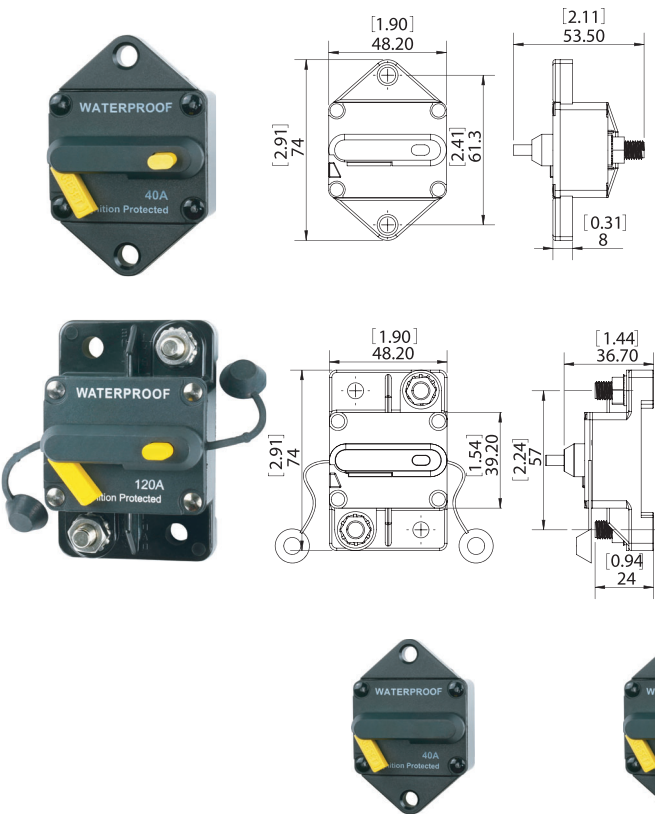

Features

- Trip-free safety design – cannot be closed after trip
- IP67 – Protection even under temporary water immersion
- Visible reset lever indicating open condition
- Manual OPEN button to manually isolate the circuit (CB-E96 / E99 Only)
- Available in surface mount or panel mount models
- Ignition protected – safe for use in engine compartment


Specifications

- Interrupting Capacity (AIC) | 3,000A @ DC 48V
- Voltage Rating | DC 48V Max
- Current Rating | DC 25 – 150A
- Terminal Studs | 1/4" – 28
- Note | SAE J553 / SAE J1171 / UL 1077 / IP67

Product ID	CB-E95	CB-E96	CB-E98	CB-E99
Mounting	Panel Mount	Panel Mount	Surface Mount	Surface Mount
Function Type	Manual Reset	Switchable Reset	Manual Reset	Switchable Reset

Push Reset Circuit Breaker

CB-P100

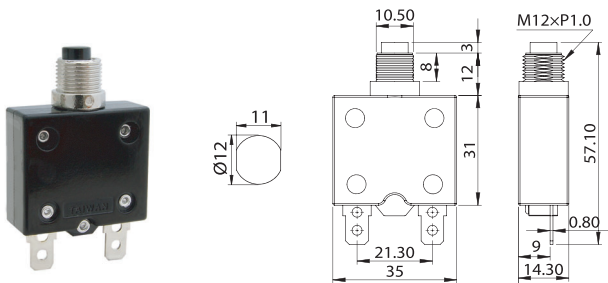


Specifications

- Voltage Rating | DC 50V, AC 125V/250V
- Amps | 3A-50A
- Dielectric Strength | AC 1500V/1 Minute
- Interrupting Capacity | 1000A @125VAC , 2000A @250VAC
- Insulation Resistance | > 100 MΩ
- Note | Approval : 3-30A 125/250V AC

Mini Size Push Reset Circuit Breaker

CB-P200

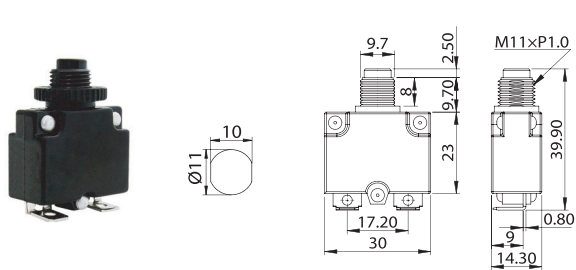


Specifications

- Voltage Rating | DC 50V, AC 125V/250V
- Amps | 3A-20A
- Dielectric Strength | AC 1500V/1 Minute
- Interrupting Capacity | 1000A @125VAC,1000A @250VAC
- Insulation Resistance | > 100 MΩ
- Note | Approval: 3-15A 125/250V AC

ATO/ATC Automotive Blade Fuse Type Circuit Breaker

CB-E02 Auto-Reset

CB-E02M Manual-Reset



Tripped when overload



Reset-able by pushing button

IGNITION
PROTECTED

- Fuse Style Thermal Circuit Breaker
- Compatible with ATC fuse blocks
- UL 94V-0 Thermosetting Plastic Housing
- Trip Free Cycling


Specifications

- Interrupting Capacity | 2,000A @ DC 28V
- Voltage Rating | Auto-Reset - DC 14V Max
Manual Reset - DC 32V Max
- Current Rating | DC 5 – 30A (Colored Coded Housing)
- Note | CE RoHS SAEJ553 Ignition Protected SAEJ 1171 /UL1500

mini ATM Automotive Blade Fuse Type Circuit Breaker

CB-E03 Auto-Reset

CB-E03M Manual-Reset



IGNITION
PROTECTED

- Fuse Style Thermal Circuit Breaker
- Compatible with ATM mini blade fuse blocks
- UL 94V-0 Thermosetting Plastic Housing
- Trip Free Cycling


Specifications

- Interrupting Capacity | 2,000A @ DC 28V
- Voltage Rating | Auto-Reset - DC 14V Max
Manual Reset - DC 32V Max
- Current Rating | DC 5 – 30A (Colored Coded Housing)
- Note | CE RoHS SAEJ553 Ignition Protected SAEJ 1171 /UL1500

Marine Grade Short-Stop Circuit Breaker

CB-SS1 Auto-Reset

CB-SS1M Manual-Reset



Red insulation cover available

IGNITION
PROTECTED

- Trip Free Cycling Thermal Circuit Breaker
- UL 94V-0 Thermosetting Plastic Housing
- Marine Grade water resistant silicon boot
- #10-32 studs with stainless steel lock nuts
- Red insulation cover available

Specifications

- Interrupting Capacity | 2,000A @ DC 28V
- Voltage Rating | Auto-Reset - DC 14V Max
Manual Reset - DC 32V Max
- Current Rating | DC 5 – 30A (Colored Coded Housing)
- Note | CE RoHS SAEJ553 Ignition Protected SAEJ 1171 /UL1500

Fuse Holders


for AGC/JMC fuses



Panel Mount Fuse Holder with Screw Cap BF101




- For 6.3 x 32mm (AGC or ATE) or 6.3 x 30mm (JMC or JTG) fuses
- Bakelite body
- Water-resistant screw cap
- Solder terminal

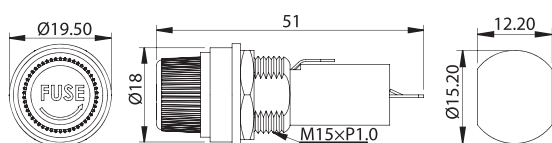

Square Panel Mount Fuse Holder with Slotted Bayonet Cap BF105




- For 6.3 x 32mm (AGC or ATE) or 6.3 x 30mm (JMC or JTG) fuses
- Bakelite body
- Slotted bayonet cap
- 0.250" Quick Connect Terminal

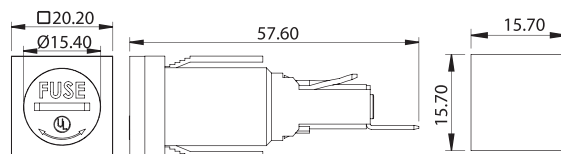

Square Panel Mount Fuse Holder with Push-in Cap BF103




- For 6.3 x 32mm (AGC or ATE) or 6.3 x 30mm (JMC or JTG) fuses
- Bakelite body
- Push-in cap available in red or white
- Solder terminal

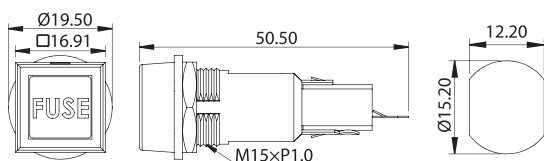

Panel Mount Fuse Holder with Screw Cap BF110




- For 6.3 x 32mm (AGC or ATE) or 6.3 x 30mm (JMC or JTG) fuses
- Bakelite body
- Water-resistant screw cap
- 0.250" Quick Connect Terminal

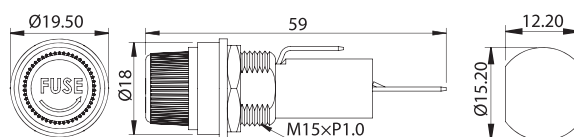

Panel Mount Fuse Holder with Screw Cap BF104




- For 6.3 x 32mm (AGC or ATE) or 6.3 x 30mm (JMC or JTG) fuses
- Bakelite body
- Screw cap with Phillips drive
- Solder terminal

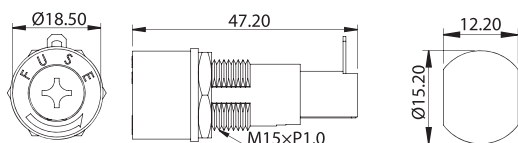

Panel Mount Fuse Holder with Screw Cap BF102



- For 5 x 20mm (GMA or GTE) fuses
- Bakelite body
- Water-resistant screw cap
- Solder terminal



Coding Guide for pre-wired in-line fuse holders

BF-301 - # - "

(1) (2) (3) (4)

(1) Wire Leads	(2) Wire Spec	(3) Wire Gauge	(4) Wire Length
- Unwired	A UL1007	22# AWG	XX" length in inches
L Loop Lead	B UL1015		
C Cut			
S Semi-stripped			
T Tinned (stripped)			

for AGC/JMC fuses



In-Line Fuse Holder for AGC/JMC Fuses BF309



- For 6.3 x 32mm (AGC/ATE) or 6.3 x 30mm (JMC/JTG) fuses
- Amperage rating: Max 30A
- Wire Gauge: #14-#18 AWG

Water-resistant In-Line Fuse Holder for AGC/JMC Fuses BF308




- For 6.3 x 32mm (AGC/ATE) or 6.3 x 30mm (JMC/JTG) fuses
- Wire Gauge: #16-#18
- Water-resistant (for #16-#18 AWG wires only)

In-Line Fuse Holder for AGC/JMC Fuses BF302



- For 6.3 x 32mm (AGC/ATE) or 6.3 x 30mm (JMC/JTG) fuses
- Bakelite body
- Wire Gauge: #10-#22 AWG

In-Line Fuse Holder for AGC/JMC Fuses BF310



- For 6.3 x 32mm (AGC/ATE) or 6.3 x 30mm (JMC/JTG) fuses
- Wire Gauge: #14-#20 AWG

In-Line Fuse Holder for AGC/JMC Fuses BF301



- For 6.3 x 32mm (AGC or ATE) or 6.3 x 30mm (JMC or JTG) fuses
- Wire Gauge : #16-#22 AWG

In-Line Fuse Holder with 3-pin connector (pre-wired) BF304



BF301 with 3-pin connector (pre-wired)

In-Line Fuse Holder with 2-pin connector (pre-wired) BF305



BF301 with 2-pin connector (pre-wired)
- BF305A : Standard Type
- BF305B : Mini Type

for GMA fuses



In-Line Fuse Holder for GMA/GTE Fuses BF303



- For 5 x 20mm (GMA/GTE) fuses
- Wire Gauge: #16-#22 AWG


In-Line Fuse Holder for GMA/GTE Fuses BF306




- For 5 x 20mm (GMA/GTE) fuses
- Wire Gauge: #16-#22 AWG

Add-A-Circuit In-line Fuse Holders


BF357 - for ATC/ATO/ATP Fuses
BF357S - for ATM Fuses



- Add a second protected circuit easily
- 2P fuse holder (1 common source input, 2 outputs)
- Wire Gauge: #14 - #18 (Default: #16/ 127mm long)
- Amperage Rating: Max 30A



Wiring Diagram



Water-resistant In-Line Fuse Holder for Automotive Fuses
BF353



- Water-resistant with cap
- Molded wiring for better sealing
- Available in 3 different sizes

Product Series			
Product ID	Compatible Fuses	Wire Gauge	Amp Rating
BF353S	ATM/ASP	#12-#16	30A
BF353	ATC/ATO/ATP	#10-#18	30A
BF353L	MAXI/ATX	#6 - #8	80A

Water-resistant In-Line Fuse Holder for ATC/ATO/ATP Fuses
BF351



- For ATC/ATO/ATP automotive fuses
- Amperage rating: Max 30A
- Wire Gauge: #10-#18 AWG
- Molded wiring for better sealing
- Water-resistant

Water-resistant In-Line Fuse Holder for ATC/ATO/ATP Fuses
BF354



- For ATC/ATO/ATP automotive fuses
- Available in blue or red
- Amperage rating: Max 20A
- Wire Gauge: #14-#18 AWG

In-Line Fuse Holder for ATC/ATO/ATP Fuses
BF352



- For ATC/ATO/ATP automotive fuses
- Amperage rating: Max 20A
- Wire Gauge: #10-#18 AWG
- Cap with see-thru window for clear view of blown fuses
- Holder for spare fuse or for mounting of multiple fuse holders

In-Line Fuse Holder for ATC/ATO/ATP and ATM Fuses
BF356



- Concave shape allowing clear view of blown fuses
- Molded wiring for better sealing

Product Series			
Product ID	Compatible Fuses	Wire Gauge	Amp Rating
BF356S	ATM/ASP	#12-#20	30A
BF356	ATC/ATO/ATP	#10-#18	30A

In-Line Fuse Holder for ATC/ATO/ATP Fuses
BF355



- For ATC/ATO/ATP automotive fuses
- Low cost model
- Amperage rating: Max 20A
- Wire Gauge: #14-#18 AWG

Connectors & Buses

Heavy-Duty Bus Bars (Imperial Threading - Upgraded 2020)

- Imperial threading screws and studs for US market
- Optional insulation cover
- Tin-plated copper bus allowing large current (100A up)
- Stainless steel screws and studs provide great anti-corrosion ability on board
- Upgraded design with Serrated Flange Nuts encourages correct installation of ring terminals
- Can be customized in Metric Threading with MOQ


Specifications

- Voltage Rating | DC 70V Max
- Studs and Screws | Stainless Steel
- Bus Bar | Tin-Plated Copper

Product ID	Studs	Screws	Rating
BF471	2 x 3/16"-24	5 x #8-32	100A
BF472	4 x 3/16"-24	-	100A
BF473	2 x 1/4"-20	10 x #8-32	150A
BF474	4 x 1/4"-20	-	150A
BF475	2 x 1/4"-20	20 x #8-32	150A
BF476	6 x 1/4"-20	-	150A
BF477	2 x 1/4"-20	12 x #8-32	150A
BF478	4 x 5/16"-18	-	300A
BF479	6 x 5/16"-18	-	300A
BF480	2 x 5/16"-18	12 x #10-24	300A
BF481	4 x 3/8"-16	-	600A
BF482	8 x 3/8"-16	-	600A

Upgrades from old models

Single Flanged Nut encourages correct installations

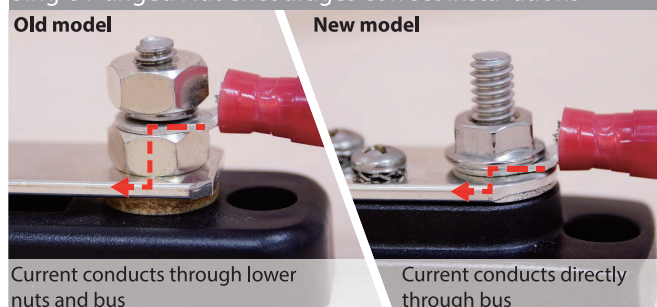


Bus Bars base available in black or red




Mini Bus Bars (100A)

BF471 / BF471C (with cover)

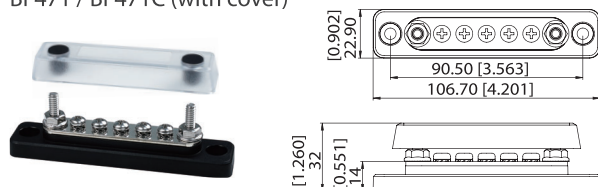


BF472 / BF472C (with cover)

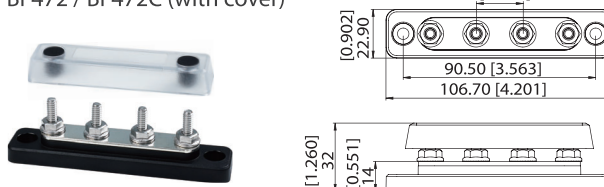


Common Bus Bars (150A)

Standard 150A bus bar with sturdy design


BF473 / BF473C (with cover)

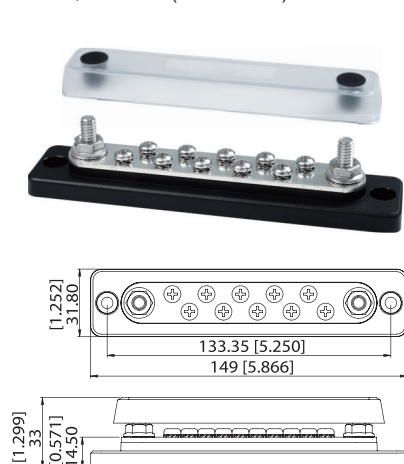

BF474 / BF474C (with cover)

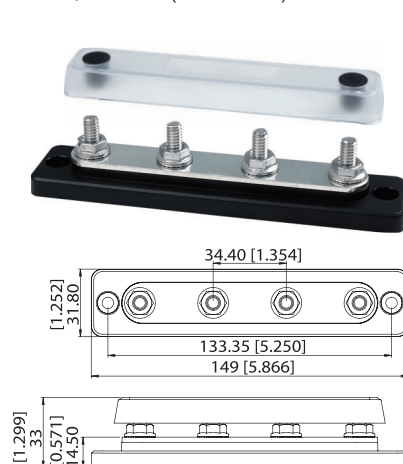


BF477 / BF477C (with cover)

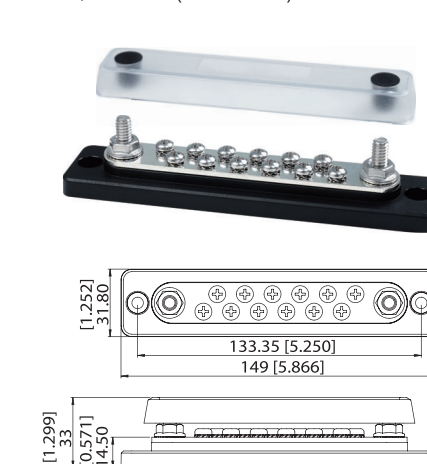




BF475 / BF475C (with cover)

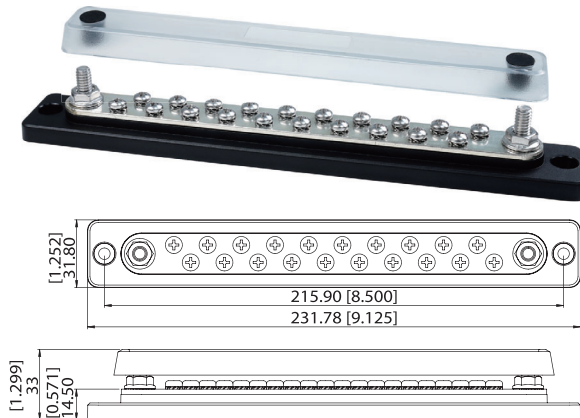


BF476 / BF476C (with cover)

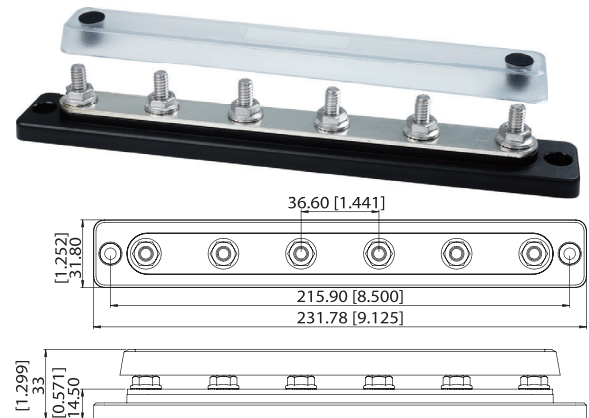


MaxiPower Bus Bar (300A)

Heavy Duty copper bus bars carry current up to 300A


BF478 / BF478C (with Cover)

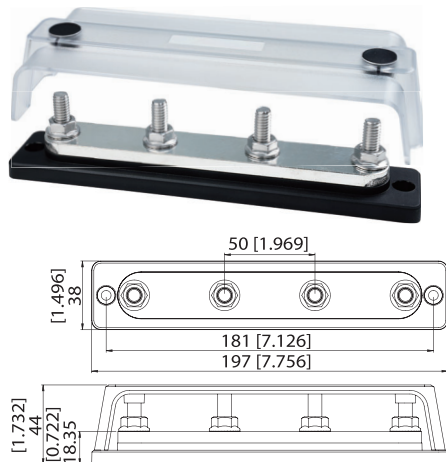

BF479 / BF479C (with Cover)

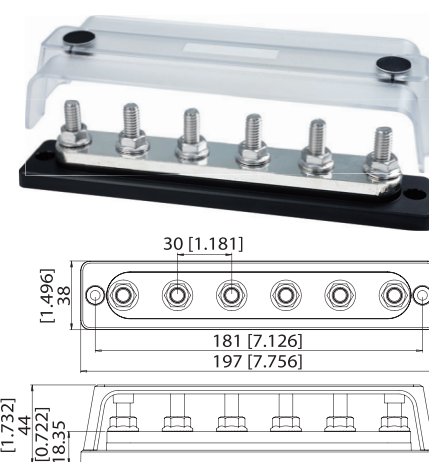


BF480 / BF480C (with Cover)

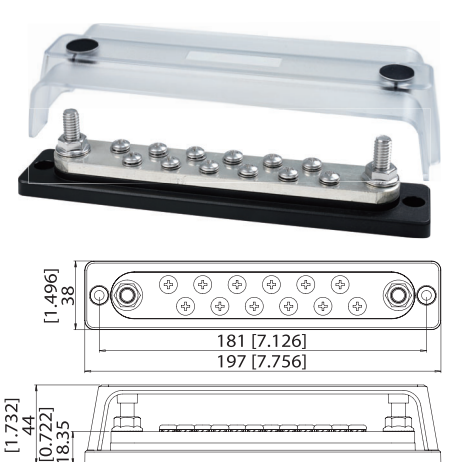

Ultra Power Bus Bar (600A)

Bus bars with very large current up to 600A


BF481 / BF481C (with Cover)

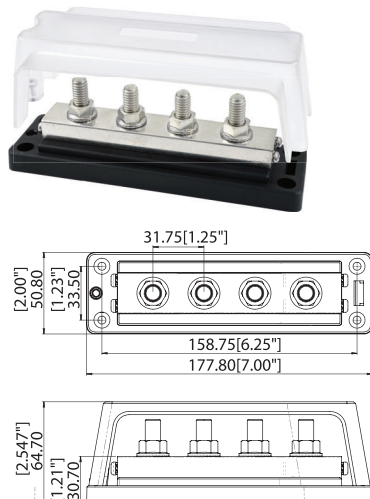

New Hybrid Locking Mechanism



BF482 / BF482C (with Cover)

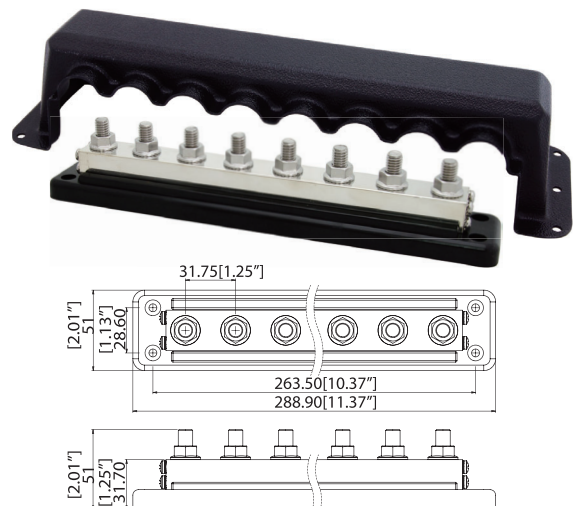

Marine Grade Bus Bars (Metric Threading)



- Metric threading screws and studs
- Glass fiber reinforced Nylon base ensures great mechanical strength and durability
- Optional transparent insulating cover with recessed area for label stickers
- Tin-plated copper bus allowing current up to 150A
- Stainless steel studs and screws provide great anti-corrosion ability on board
- Insulated base ensures no leakage to metal hulls

Upgrades from old models

Transparent cover for all models




Insulated base ensures no leakage to metal hulls



New compact base for single bus bars



Bus height differentials allow cable output from the same side (BF427)

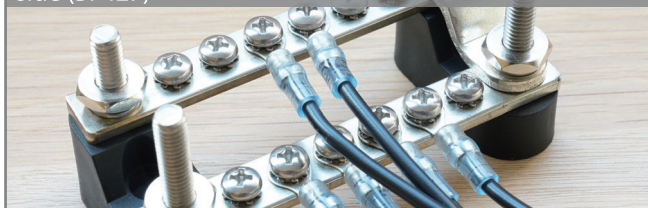

Single Bus Bars

Compact size bus bars with ample 150A capacity

BF421-6P / BF425-6P

BF421C-6P / BF425C-6P (with cover)



BF421-12P / BF425-12P

BF421C-12P / BF425C-12P (with cover)





BF423-4P

BF423C-4P (with cover)




BF423-6P

BF423C-6P (with cover)

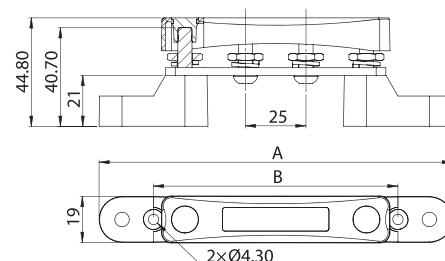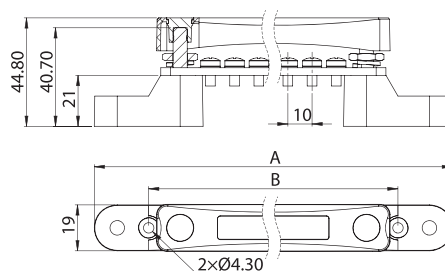

Product ID	Studs	Screws	A. Length (mm)	B. Mounting Centers (mm)	Rating	Bus Material
BF421-6P	2 x M6 (1/4")	6 x M4 (5/32")	146	101	100A	Brass
BF421-12P	2 x M6 (1/4")	12 x M4 (5/32")	206	161	100A	Brass
BF425-6P	2 x M6 (1/4")	6 x M4 (5/32")	146	101	150A	Copper
BF425-12P	2 x M6 (1/4")	12 x M4 (5/32")	206	161	150A	Copper
BF423-4P	4 x M6 (1/4")	-	146	101	100A	Brass
BF423-6P	6 x M6 (1/4")	-	206	161	100A	Brass



Common Bus Bars

Standard common bus bars with 10 or 22 terminals


BF424-10P

BF424C-10P (with cover)



BF424-22P

BF424C-22P (with cover)

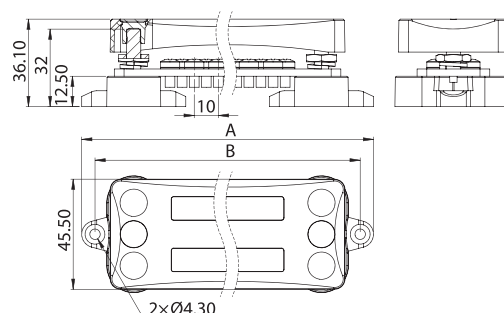

Product ID	Studs	Screws	A. Length (mm)	B. Mounting Centers (mm)	Rating
BF424-10P	2 x M6 (1/4")	10 x M4 (5/32")	118	107	150A
BF424-22P	2 x M6 (1/4")	22 x M4 (5/32")	178	167	150A

Dual Bus Bars

Dual bus bars with removable connecting link


BF422-6P / BF426-6P

BF422C-6P / BF426C-6P (with cover)



BF422-12P / BF426-12P

BF422C-12P / BF426C-12P (with cover)

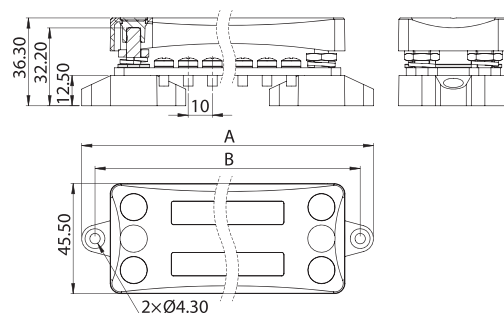

Product ID	Studs	Screws	A. Length (mm)	B. Mounting Centers (mm)	Rating per bus	Bus Material
BF422-6P	Dual 2 x M6 (1/4")	Dual 6 x M4 (5/32")	118	107	100A	Brass
BF422-12P	Dual 2 x M6 (1/4")	Dual 12 x M4 (5/32")	178	167	100A	Brass
BF426-6P	Dual 2 x M6 (1/4")	Dual 6 x M4 (5/32")	118	107	150A	Copper
BF426-12P	Dual 2 x M6 (1/4")	Dual 12 x M4 (5/32")	178	167	150A	Copper

"2-Steps" Dual Bus Bar

Bus bars with different heights allowing more flexible wiring


BF427-6P

BF427C-6P (with cover)



BF427-12P


BF427C-12P (with cover)

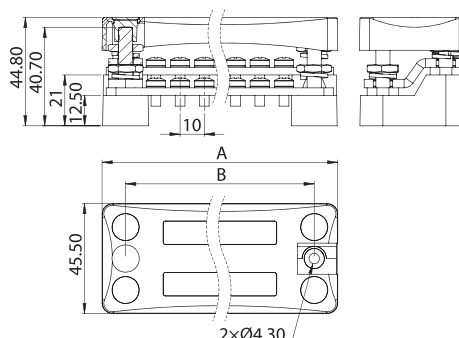


Product ID	Studs	Screws	A. Length (mm)	B. Mounting Centers (mm)	Rating per Bus
BF427-6P	Dual 2 x M6 (1/4")	Dual 6 x M4 (5/32")	94	75	150A
BF427-12P	Dual 2 x M6 (1/4")	Dual 12 x M4 (5/32")	154	135	150A

Wire Output Options:

Single side



Double Side




Heavy-Duty Terminal Studs

- Allow terminating of heavy-duty cables for one or more connections
- Red or Black colors allowing easy and clear color coding for wiring
- Glass Fiber reinforced Nylon base ensures great mechanical strength and durability
- Heavy duty terminal studs (up to M10)
- Insulated base ensures no leakage to metal hulls (New Feature)

Single Terminal Studs

BF411

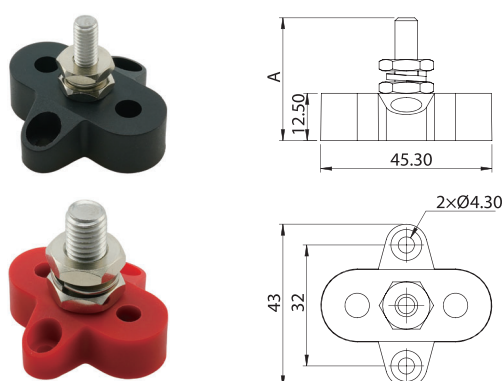


Product ID	Stud Size	A. Height (mm)
BF411-M6 / BF411R-M6	1 x M6 (1/4")	32.5
BF411-M8 / BF411R-M8	1 x M8 (5/16")	32.5
BF411-M10 / BF411R-M10	1 x M10 (3/8")	37.5

Specifications

- Max Operating Voltage | DC 48V
- Max Amp per circuit | Determined by wires connected
- Terminal Stud Size | See each model

Dual Terminal Studs

BF412

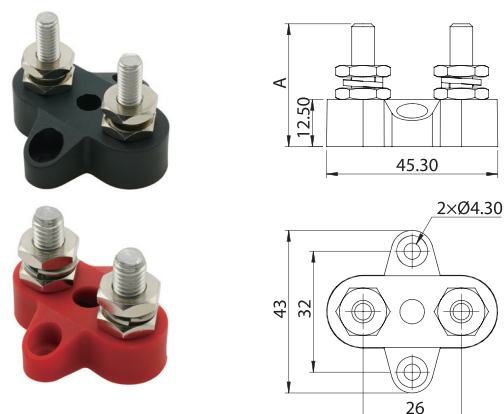


- Dual Terminal Studs with options of different studs sizes

Product ID	Stud Size	A. Height (mm)
BF412-M6 / BF412R-M6	2 x M6 (1/4")	32.5
BF412-M8 / BF412R-M8	2 x M8 (5/16")	32.5

Dual Terminal Studs with Connecting Link

BF413

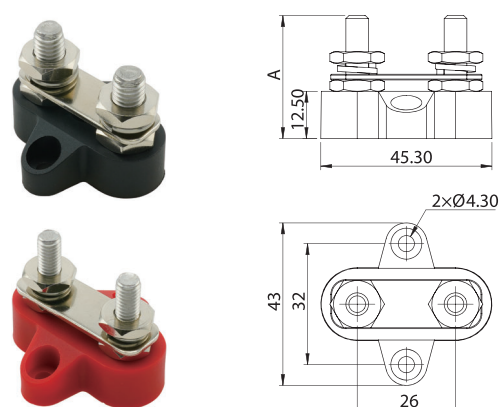


- Dual Terminal Studs with options of different studs sizes
- Removable Connecting Link withstands current up to 80A

Product ID	Stud Size	A. Height (mm)
BF413-M6 / BF413R-M6	2 x M6 (1/4")	32.5
BF413-M8 / BF413R-M8	2 x M8 (5/16")	32.5

Dual Terminal Studs with Isolating Plate

BF414

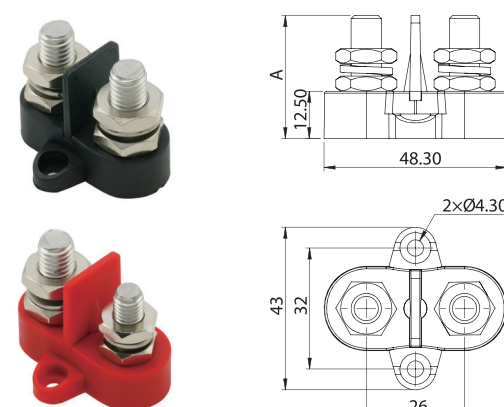


- Dual Terminal Studs with options of different studs sizes
- Removable isolating plate

Product ID	Stud Size	A. Height (mm)
BF414-M8 / BF414R-M8	2 x M8 (5/16")	32.5
BF414-M10 / BF414R-M10	2 x M10 (3/8")	37.5
BF414-M8M10 / BF414R-M8M10	1 x M8 (5/16") + 1 x M10 (3/8")	37.5

Terminal Blocks

Independent Source Terminal Blocks 30A BF401-XXP

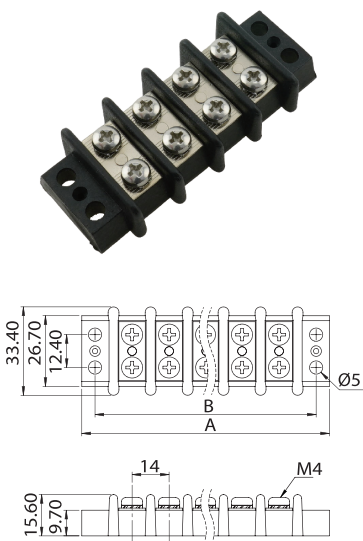


BF-JP-3
Jumpers for BF401



- Maximum Voltage | 300V AC/DC
- Continuous Rating | 30A
- Base Material | UL 94 V0, Nylon
- Bus Material | Nickel-Plated Brass
- Mounting Screw | M5 (#10)
- Screw Material | Stainless Steel
- Terminal Screws | M4 with exterior gear Washer

Product ID	Circuits	A. Length(mm)	B. Mounting Centers(mm)
BF401-2P	2	52	42
BF401-4P	4	80	70
BF401-6P	6	108	98
BF401-8P	8	136	126
BF401-10P	10	164	154
BF401-12P	12	192	182

Independent Source Terminal Blocks 20A BF402-XXP

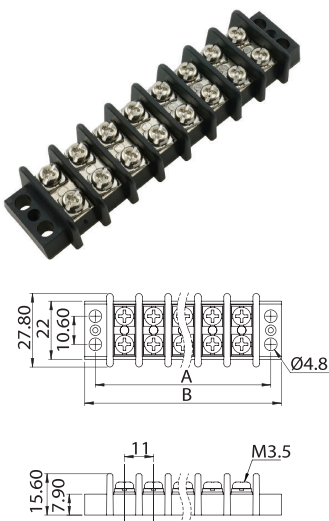

BF-JP-4
Jumpers for BF402




- Maximum Voltage | 300V AC/DC
- Continuous Rating | 20A
- Base Material | UL 94 V0, Nylon
- Bus Material | Nickel-Plated Brass
- Mounting Screw | M3.5 (#6)
- Screw Material | Steel / Nickel Plated
- Terminal Screws | M3.5
- Wire Terminal Size | M3 (#6)

Product ID	Circuits	A. Length(mm)	B. Mounting Centers(mm)
BF402-2P	2	41	33
BF402-4P	4	63	55
BF402-6P	6	85	77
BF402-8P	8	107	99
BF402-10P	10	129	121
BF402-12P	12	151	143

PD (Power Delivery) - Modern Fast Charging Capabilities for USB Charger Sockets:

Charge Compatibility & Fast Charging

As phone and other digital devices batteries grow larger, fast charging becomes crucial. In the past QC (Quick Charge) provides fast charging but only works with Qualcomm-based Android phones, while the newer PD (Power Delivery) protocol now supports Android, iPhones, iPads, and laptops. PD can charge a smartphone from 0% to 50% in just 30 minutes.

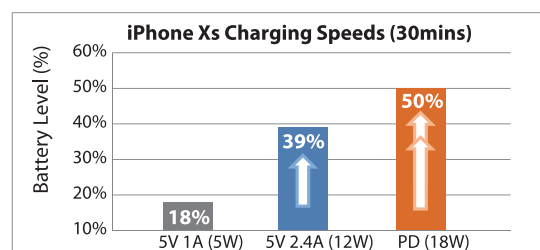

Charging Speed of iPhone Xs by different chargers in 30 mins


Power Delivery – High Wattage Charging

Power Delivery (PD) utilizes higher charging voltage (9V, 12V, 15V or 20V) gear to achieve larger wattage charging. In general PD 3.0 100W (20V 5A) is enough for most devices. Here is a quick chart showing PD Wattage for popular products in market:


PD Wattage	Voltage x Amp (Max.)	Compatible Devices	
5W	5V × 1A	 Smart Watch	 Wireless Earphone
PD18W	9V × 2A	 iPhones	 Android phones and tablets
PD30W	15V × 2A	 Macbook Airs	 iPads
PD45W	20V × 2.25A	 Flagship smartphones	 Switch
PD65W	20V × 3.25A	 Macbook Pro	 Drones
PD100W	20V × 5A	 Macbook Pro 16	 High-end laptops

Independent DC/DC Converter for 2 USB Sockets

Currently the most popular USB Charger models are 2 ports USB A + USB C chargers. However in most DC PD chargers A port and C port often “share” a single DCDC converter due to cost or space limit, which PD mode only works when 1 port is used and when both ports are used the charger would only have 5V output. In YIS Marine, our AS239 incorporated 2 independent DCDC converters for the C and A port, allowing 2 PD / QC devices can be fast charged at the same time.



PD “Buck-Boost” capability for High Voltage output (PD45W or above)





PD45W and above is often needed to charge your laptops. Unlike home AC PD Chargers always do “step-down” converting from AC 110V - 230V to DC PD outputs, in DC 12V systems, we cannot achieve 15V or 20V output (PD45W and above) without costly and bulky “step-up” or “Buck-boost” converter. YIS Marine has successfully developed 2 PD100W “Buck-Boost” USB charger models for branded customers.

Product Series

PD36W Dual Flap USB Chargers AS223 USB Type A +Type C

New
Product

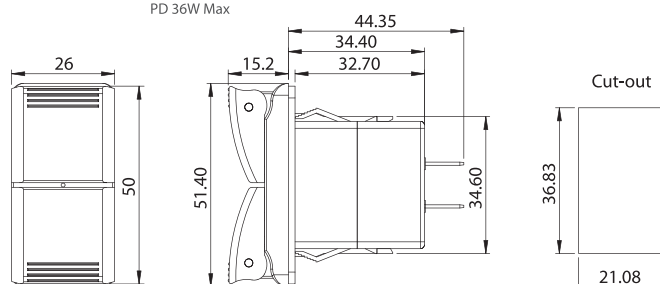



- Type C port - PD 36W compatible with latest PD devices in market (iPhones/iPads/Android/Nintendo Switch)
- Fast charges your iPhone / Android phones from 0% to 50% within 30 mins
- IP64 – protected against water splashes from any direction (when covered)

Specifications

- Operating Voltage | 12V / 24V DC power systems (10 to 30VDC)
- Output Mode | **AS223-1A1C**
USB A - 5V/3A; 9V/3A (27W Max)
USB C - 5V/3A; 9V/3A; 12V/3A (36W max.)
USB A+C - USB-A 5V/2.4A + USB-C 5V/2.4A
- Note | **CE** IP64

PD100W USB Chargers (1-1/4") AS239UB-100W

New
Product

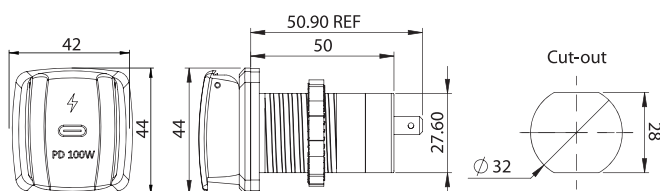

- Boost Conversion Supports 20V Output from 12V Input
- PD 100W (20V 5A max), compatible with most laptops, smartphones, tablets, and Starlink devices
- Spring load cover closes automatically and holds when fully open
- Patented locking design when cover closed ensures water resistance rating up to IP66
- PD Color Changing LED indication tells you whether charging is in PD mode (Orange LED)
- IP66 – protected against strong water jets (when covered)


Specifications

- Operating Voltage | 12V / 24V DC power systems (10 to 30VDC)
- Output Mode | 5V/5A; 9V/5A; 12V/5A; 15V/5A; 20V/5A
- Note | Patented in Taiwan (M674055) & China (ZL202530510864.7) **CE** IP66

PD65W Dual Independent DCDC Converters USB Chargers (1-1/4")

AS239 USB Type A + Type C

AS239C USB Type C x 2

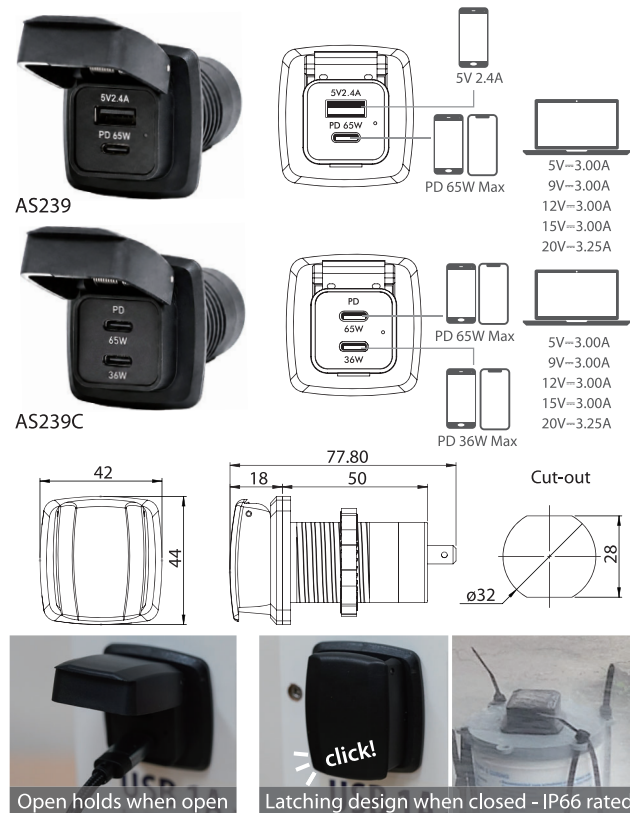

- Independent 2 DCDC converters allowing PD / QC fast charging on A & C ports when both are used
- PD 65W (20V 3.25A max) compatible with most laptops, smartphones or tablets
- Spring load cover closes automatically and holds when fully open
- Patented locking design when cover closed ensures water resistance rating up to IP66
- PD Color Changing LED indication tells you whether charging is in PD mode (Orange LED)
- IP66 – protected against strong water jets (when covered)

Specifications

- Input Voltage | DC 10 to 30V
 - Output Mode |
 - USB A - 5V/3A; 9V/3A; 12V/3A
 - USB C - 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3.25A (65W max.)
 - USB A+C - USB-A 12V/3A + USB-C 20V/3.25A max
 - Note | Patented in Taiwan (M674055) & China (ZL202530510864.7) **CE** IP66
- *15V/20V mode is only achievable when input > 22V*

PD45W Type A + Type C charger with PD Color Changing LED Indication (1-1/8")

AS238



Watch Intro Video on Youtube



- Type A port - 5V 2.4A compatible with most smartphones in market
- Type C port - PD 45W compatible with latest PD devices in market (iPhones/iPads/Android/Nintendo Switch)
- Fast charges your iPhone / Android phones from 0% to 50% within 30 mins
- Also charges ultrabooks, Macbooks & Macbook Air (after 2018) in 20V mode

Specifications

- Input Voltage | DC 10 to 30V
 - Output Mode |
 - USB A - 5V/2.4A
 - USB C - 5V/3A; 9V/3A; 12V/3A; 15V/2.25A; 20V/2.25A; (45W Max)
 - USB A+C - USB-A 5V/2.4A + USB-C 5V/2A max
 - Note | **CE** IP65
- *20V/2.25A mode is only achievable when input > 22V*

PD36W Standard USB Chargers (1-1/8")

AS234PD-1A1C


AS234PD-1C



AS234PD-1A1C



AS234PD-1C

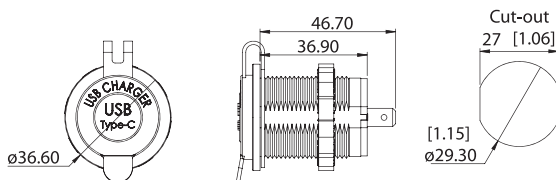

- Type A port - 5V 2.4A compatible with most smartphones in market
- Type C port - PD 36W compatible with latest PD devices in market (iPhones/iPads/Android/Nintendo Switch)
- Fast charges your iPhone / Android phones from 0% to 50% within 30 mins
- Lower cost alternative to AS238
- Standardized 1-1/8" cut-out
- Flame retardant Nylon (glass fiber reinforced) enclosure

Specifications


- Input Voltage | DC 10 to 30V
- Output Mode |
AS234PD-1A1C
 USB A - 5V/3A; 9V/2A (18W Max)
 USB C - 5V/3A; 9V/3A; 12V/3A (36W max.)
 USB A+C - 5V/2.4A + 2.4A
AS234PD-1C
 USB C - 5V/3A; 9V/3A; 12V/3A (36W max.)
- Note | IP65

PD18W Type A+ Type C USB Charger for motorcycles (1-1/8")

AS221



Enhanced Sealing Cap

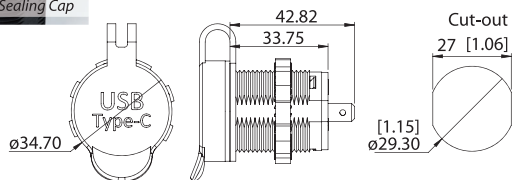


- Type A port - 5V 2.4A compatible with most smartphones in market
- Type C port - PD 18W compatible with latest PD devices in market (iPhones/iPads/Android/Nintendo Switch)
- Fast charges your iPhone / Android phones from 0% to 50% within 30 mins
- Lower cost alternative to AS238
- Enhanced IP66 water-sealing cap design

PD18W Type A+ Type C USB Charger (Switch Mount)

AS222



New PD Type-C Socket

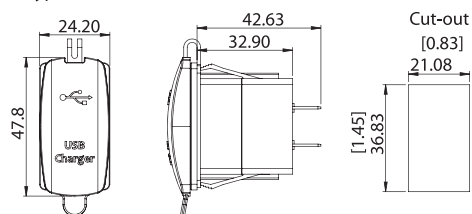

Specifications


- Input Voltage | DC 10 to 30V
- Output Mode |
 USB A - 5V2.4A
 USB C - 5V/3A; 9V/2A; 12V/1.5A (18W max.)
 USB A+C - 5V 3A max (USB-A+C total)
- Note | IP66





Double A Ports USB Charger (1-1/8")

AS234

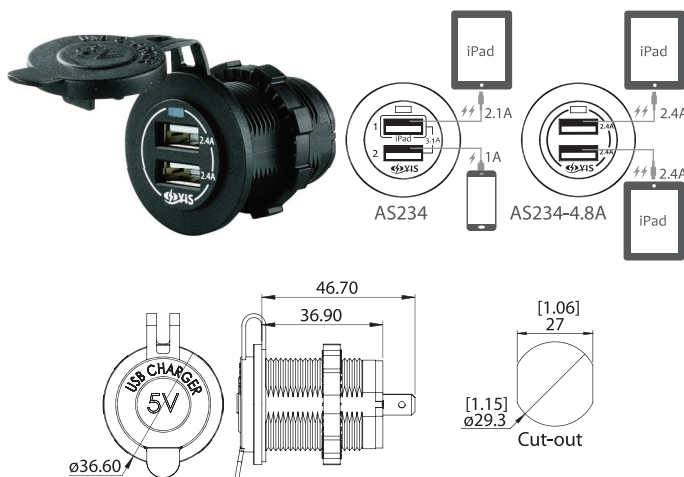

- Best Cost-Performance value
- Best-selling item with solid performance and competitive price
- Two port 2.4A large current charger
- Charges 2 iPads at full speed at the same time

Double A Ports USB Charger (Switch Mount)

AS235




Specifications

- Input Voltage | DC 10 to 30V
- Output Mode | 5V/2.4A
- Note | CE IP66

Single Port USB Chargers

AS233

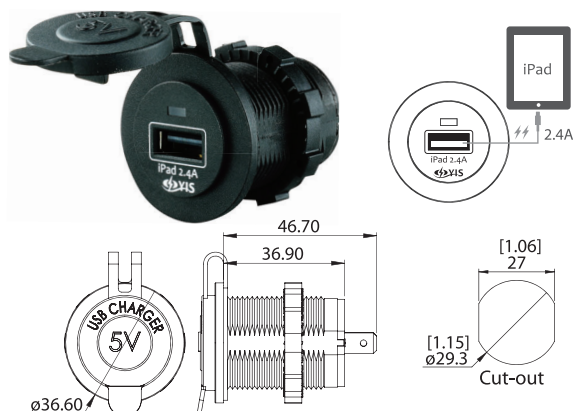


- Single Port 2.4A USB Charger (12W)
- Fast charges iPad /iPhone and Android devices

Specifications

- Input Voltage | DC 10 to 30V
- Output Mode | 5V/2.4A
- Note | CE IP66

Snap-in Keystone USB Charger Socket (Type A)

AS236

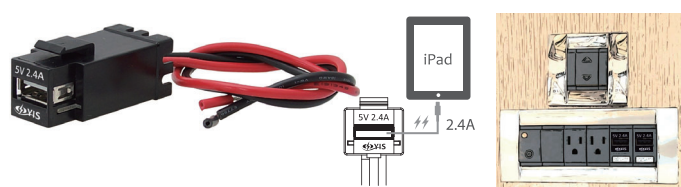

- Snap-in Keystone Charger Socket for Decora Style wallplate (RJ-45 Keystone hole)
- Single Port 2.4A USB Charger (12W)
- Fast charges iPad /iPhone and Android devices

YIS Marine USB Charger Sockets Selection Chart

Model#	 USB TYPE A	 USB TYPE C	PD/QC	Power	Voltage × Amp. Rating	Note
1-1/8" Sockets						
 AS233	× 1	-		12W	5V × 2.4A	Single Port 5V 2.4A
 AS234-4.8A	× 2	-		24W	5V × 2.4A + 5V × 2.4A	5V 4.8A large current
 AS221	× 1	× 1	●	PD18W	USB-A: 5V × 2.4A USB-C: 5V × 3A; 9V × 2A; 12V × 1.5A (18W) UBS-A+C: 5V × 3A (USB-A + C total)	Designed for Motorcycle market
 AS238-18W	× 1	× 1	●	PD18W	USB-A: 5V × 2.4A USB-C: 5V × 3A; 9V × 2A; 12V × 1.5A (18W) UBS-A+C: 5V × 3A (USB-A + C total)	-
 AS234PD-1C	-	× 1	●	PD36W	USB-C: 5V × 3A; 9V × 3A; 12V × 3A (36W)	-
 AS234PD-1A1C	× 1	× 1	●	PD36W	USB-A: 5V × 3A; 9V × 2A (18W) USB-C: 5V × 3A; 9V × 3A; 12V × 3A (36W) UBS-A+C: 5V × 2.4A + 5V × 2.4A	-
 AS237	-	× 1	●	PD45W	USB-C: 5V × 3A; 9V × 3A; 12V × 3A; 15V × 2.25A; 20V × 2.25A (45W)	with PD Color Changing LED indication *15V/20V mode is only achievable when input > 22V
 AS238	× 1	× 1	●	PD45W	USB-A: 5V × 2.4A USB-C: 5V × 3A; 9V × 3A; 12V × 3A; 15V × 2.25A; 20V × 2.25A (45W) UBS-A+C: 5V × 2.4A(USB-A) + 5V × 2A(USB-C)	with PD Color Changing LED indication *15V/20V mode is only achievable when input > 22V
1-1/4" Sockets						
 AS239	× 1	× 1	●	PD65W	USB-A: 5V × 3A; 9V × 3A; 12V × 3A; 20V × 3A (60W) USB-C: 5V × 3A; 9V × 3A; 12V × 3A; 15V × 3A; 20V × 3.25A (65W) UBS-A+C: 20V × 3A (USB-A 60W) + 20V × 3.25A (USB-C 65W)	Independent Dual DCDC Converters PD Color Changing LED indication *15V/20V mode is only achievable when input > 22V
 AS239C	-	× 2	●	PD65W	USB-C1: 5V × 3A; 9V × 3A; 12V × 3A; 15V × 3A; 20V × 3.25A (65W) USB-C2: 5V × 3A; 9V × 3A; 12V × 3A (36W) UBS-C1+C2: 20V × 3.25A (USB-C1 65W) + 12V × 3A(USB-C2 36W)	Independent Dual DCDC Converters PD Color Changing LED indication *15V/20V mode is only achievable when input > 22V
 New AS239UB	-	× 1	●	PD100W	USB-C: 5V × 5A; 9V × 5A; 12V × 5A; 20V × 5A (100W)	Upper-Boost allows 20V output even with 12V input
Switch Mounting						
 AS235-4.8A	× 2	-		24W	5V × 2.4A + 5V × 2.4A	Designed for Contura Style Switch Sockets
 New AS223	× 1	× 1	●	PD36W	USB-A: 5V × 3A; 9V × 3A (27W) USB-C: 5V × 3A; 9V × 3A; 12V × 3A (36W) UBS-A+C: 5V × 2.4A + 5V × 2.4A	Designed for Contura Style Switch Sockets Dual spring loaded flap covers
 AS222	× 1	× 1	●	PD18W	USB-A: 5V × 2.4A USB-C: 5V × 3A; 9V × 2A; 12V × 1.5A (18W) UBS-A+C: 5V × 3A (USB-A + C total)	Designed for Contura Style Switch Sockets

*Contact our sales for Customize OEM or ODM USB Chargers Design



12V-24V Accessories

Battery Gauges

PATENTED
TW,CH



SP-BGX Series are compact size, self-powered DC battery gauges. The patented see-through uni-body housing leaves no opening in the front, allowing low profile outlook and excellent protection against dust, moisture, and vibration. The series includes a voltmeter, an ammeter and a voltage / current dual meter and are available in either wire output or .250" quick terminals (with suffix "T"). These battery gauges are made for either standard 1-1/8" cut-out with several mounting accessories (see page 64) or for popular Contura style switch mounting holes.



IP67: protection against temporary water immersion

Two Output Options: Wire & Quick Terminals


Patented see-through display design

Digital Voltmeter

SP-BG1 (with wire output) / SP-BG1T (with Quick Connector Terminals)

Digital Voltmeter – Switch Mount

SP-BG4

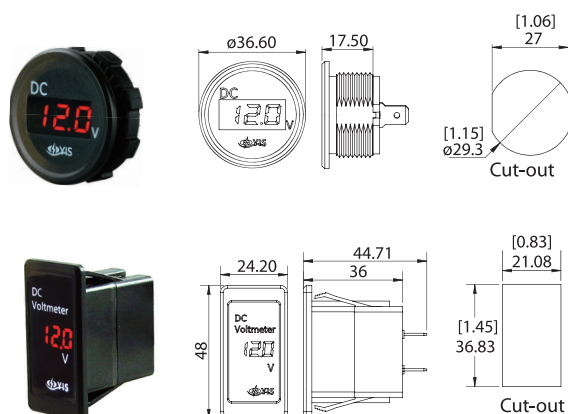

Features


- Compact Size with 3 digits LED display
- Self-powered from measuring DC voltage
- Floating decimal point for better resolution below 10V
- Completely sealed design with no opening (IP67)
- Reversed polarity input protection

Specifications

- Voltage Range | DC 2.50-30V
- Current Consumption | <30mA
- Sampling Rate | 5 readings/s
- Resolution | 0.01V (<10V) / 0.1V (>10V)
- Note | IP67 Patented

Digital Voltmeter up to 100V

SP-BG1-100V

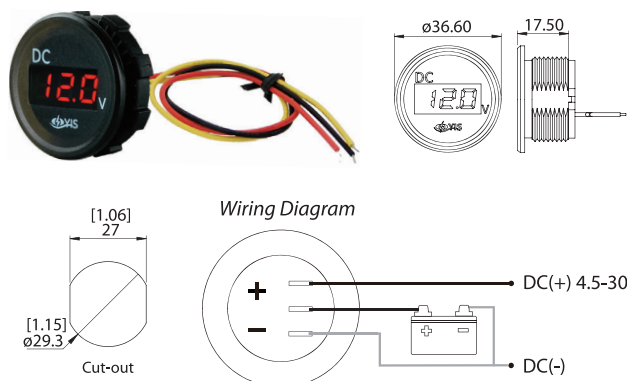

Features

- Compact Size with 3 digits LED display
- Measuring large voltage range from 0 - 100V
- Completely sealed design with no opening (IP67)
- Reversed polarity input protection

Specifications

- Measure Voltage Range | DC 0-100V
- Powering Voltage Range | DC 4.5-30V
- Current Consumption | <30mA
- Sampling Rate | 5 readings/s
- Resolution | 0.1V
- Note | IP67 Patented

Digital Voltage & Current Dual-meter

SP-BG2 / SP-BG2-150A

Digital Voltage & Current Dual-meter – Switch Mount


SP-BG5




SP-BG2



SP-BG2-150A



SP-BG5

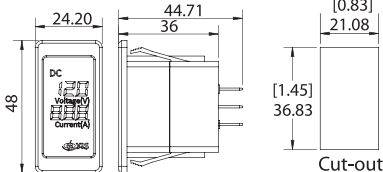

Features

- Compact Voltage & Current 2 in 1 meter
- Digital 3 digits LED displays
- Self-powered from measuring DC voltage
- Floating decimal point for better resolution
- Completely sealed design with no opening (IP67)
- Reversed polarity input protection

Additional Features for SP-BG2-150A

- Includes 500 Amp shunt
- Measuring large amperage range from 0 – 150A

Specifications

SP-BG2 / SP-BG5

- Voltage Range | DC 4.5-30V
- Amperage Range | DC 0-15A
- Amperage Tolerance | > 10A: $\pm 0.5A$, <10A $\pm 0.17A$
- Note | CE IP67 Patented

SP-BG2-150A

- Voltage Range | DC 4.5-30V
- Amperage Range | DC 0-150A
- Amperage Tolerance | $\pm 2\%$
- Shunt Type | 50mV
- Note | CE IP67 Patented

Digital Ammeter



SP-BG3 / SP-BG3-150A



SP-BG3



SP-BG3-150A

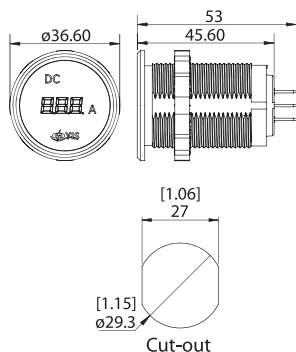

Features

- Compact Size with 3 digits LED display
- Self-powered from measuring DC voltage
- Floating decimal point for better resolution
- Completely sealed design with no opening (IP67)

Additional Features for SP-BG3-150A

- Includes 500 Amp shunt
- Measuring large amperage range from 0 – 150A


Specifications

- Voltage Rating | DC 4.5-30V
- Amperage Range | DC 0-15A
- Amperage Tolerance | > 10A: $\pm 0.5A$, <10A $\pm 0.17A$
- Note | CE IP67 Patented

SP-BG3-150A

- Voltage Range | DC 4.5-30V
- Amperage Range | DC 0-150A
- Amperage Tolerance | $\pm 2\%$
- Shunt Type | 50mV
- Note | CE IP67 Patented

Watch Intro Video on Youtube



Digital Voltmeter with Battery Level Display SP-BG6




Features

- Compact Size with 3 digital LED display
- Easily recognizable Battery Status LEDs
- 12 / 24V systems auto detect (compatible to both systems)
- Completely sealed with no opening (IP67)
- Reverse polarity input protection
- Self-powered from measuring DC voltage

Specifications

- Voltage Rating | 5 – 30V (12/24V Auto Detect)
- Refresh Rate | 100ms
- Note | IP67 Patented

Digital Voltmeter with Rainbow Battery Level Display SP-BG7

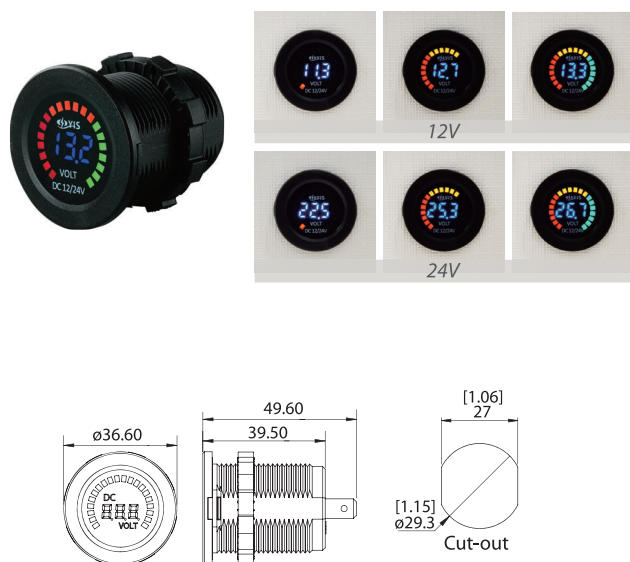

Features

- Compact Size with 3 digital LED display
- Easily recognizable Battery Status LEDs
- 12 / 24V systems auto detect (compatible to both systems)
- Reverse polarity input protection
- Self-powered from measuring DC voltage
- Low-voltage alarm when volt is lower than 11V in 12V mode, 22V in 24V mode

Specifications

- Voltage Rating | 7 – 30V (12/24V Auto Detect)
- Refresh Rate | 100ms
- Low Voltage Alarm | 11.0V (@12V mode) / 22.0V (@24V mode)
- Note |

Cigarette Lighter Plugs

Normal Cigarette Lighter Plugs

with AGC/JMC Fuses



Bakelite Cigarette Lighter Plug with Fuse AP101



- Replaceable AGC/JMC Fuses
- Heat-resistant Bakelite body
- Heavy-duty (20A) model available
- Designed for Size A (φ21.0mm) Sockets
- Amp Rating : Standard Model: 5A / Enhanced Model: 20A
- CE

Illuminated Cigarette Lighter Plug with Fuse AP109



- Replaceable AGC/JMC Fuses
- Illuminated shielding
- Heavy-duty (20A) model available
- Designed for both Size A (φ 21.0mm) & Size B (φ22.0mm) Sockets
- Amp Rating : Standard Model: 5A / Enhanced Model: 20A
- CE

Bakelite Cigarette Lighter Plug with Fuse AP110



- Replaceable AGC/JMC Fuses
- Heat-resistant Bakelite body
- Heavy-duty (20A) model available
- Designed for both Size A (φ 21.0mm) & Size B (φ22.0mm) Sockets
- Amp Rating : Standard Model: 5A / Enhanced Model: 20A
- CE


Cigarette Lighter Plug with Fuse AP113



- Replaceable AGC Fuses
- Designed for both Size A (φ 21.0mm) & Size B (φ22.0mm) Sockets
- Amp Rating : 10A
- CE


Bendable Car Cigarette Plug with Switch and Fuse AP120

PATENTED
TW




- Replaceable AGC/JMC Fuses
- Bendable with multiple angle positions ($\pm 60^\circ$)
- Built-in On-Off Switch
- LED power indicator
- Latching collar that latches onto retainers in cigarette lighter sockets
- Designed for both Size A (φ 21.0mm) & Size B (φ22.0mm) Sockets
- Amp Rating : 10A
- Patented : TW No. P-053789
- CE

Marine Grade Locking Cigarette Lighter Plug with Fuse AP121A (with LED) / AP121B (without LED)



① Insert AP121 with the negative terminal on the top



② Twist AP121 by 90° until locked. Twist again to unlock

- Replaceable AGC Fuses
- Sturdy, solid design and assembly
- Flame retardant Nylon (glass fiber reinforced) body
- Twist-and-Lock capability when used with AS212
- Rubber ring for better stability and sealing when plugged
- LED power indicator (AP121A only)
- Designed for both Size A (φ 21.0mm) & Size B (φ22.0mm) Sockets
- Amp Rating : Standard Model: 5A / Enhanced Model: 20A
- CE

Deluxe Cigarette Lighter Plug with LED (Fused) AP112A (with LED) / AP112B (without LED)



- Replaceable AGC/JMC Fuses
- Sturdy, solid design and assembly
- Robust Nylon (glass fiber reinforced) body
- LED power indicator (AP112A only)
- Designed for both Size A (φ 21.0mm) & Size B (φ22.0mm) Sockets
- Amp Rating : Standard Model: 5A / Enhanced Model: 20A
- CE

Deluxe Cigarette Lighter Plug with LED (Fused)

AP111A (with LED) / AP111B (without LED)

Best
Seller



- Replaceable AGC/JMC Fuses
- Sturdy, solid design and assembly
- LED power indicator (AP111A only)
- Heavy-duty (20A) model available
- Best Seller
- Designed for both Size A (φ21.0mm) & Size B (φ22.0mm) Sockets
- Amp Rating : See below
- C E

Coding Guide for AP111 Customizations:

As our No.1 seller in AP series, AP111 can be customized to meet every customer's requirement, please use the following table to pick one AP111 that fits your requirement most :

AP111□ - □ - □□A

(1) (2) (3)

(1) LED indicator	(2) Body Material	(3) Amp Rating
A with LED	A ABS	- 5 Amps
B without LED	N Nylon, Glass Fiber reinforced	10A 10 Amps
	P PBT, Glass Fiber reinforced (UL94V-0)	15A 15 Amps
		20A 20 Amps

Best Selling Models				
Product ID	Body Material	Terminals Finish	Amp Rating	Note
AP111A-A	ABS	Nickel plated	5A	Standard Model with LED
AP111B-A	ABS	Nickel plated	5A	Standard Model without LED
AP111A-N-10A	Nylon, Glass Fiber reinforced	Nickel plated	10A	Robust body material with LED
AP111A-N-20A	Nylon, Glass Fiber reinforced	Gold plated	20A	Heavy-duty (20A) model with LED
AP111A-P-20A	PBT, Glass Fiber reinforced (UL94V-0)	Gold plated	20A	Heavy-duty 20A with UL94V-0 flame retardant body material and LED



AP111B




AP111A-N-20A

Pre-wired AP111*



AP111A-2S1-12FT



AP111A-1P3-18#-6FT

* AP111 can also be sold pre-wired, see page 54 for available options

with GMA Fuses

Mini Size Cigarette Lighter Plug with Fuse

AP102



- Replaceable GMA Fuse
- Compact size
- Designed for both Size A (φ21.0mm) & Size B (φ22.0mm) Sockets
- Amp Rating : 10A
- C E

Mini Size Cigarette Lighter Plug to DC Jack Adapter

AP105



- Replaceable GMA Fuse
- Output : DC Jack 3.5 x 1.3mm
- Compact size
- Designed for Size A (φ21.0mm) Sockets
- Amp Rating : 5A
- C E

Cigarette Lighter Plug with Fuse

AP119



- Replaceable GMA Fuses
- Heat-resistant Bakelite head
- Designed for both Size A (φ21.0mm) & Size B (φ22.0mm) Sockets
- Amp Rating: 5A
- C E

Cigarette Lighter Plug with LED Switch (Fused)

AP130



- Replaceable GMA Fuses
- Illuminated push-button switch
- Wire leads from the side
- Designed for Size A (φ21.0mm) Sockets
- Amp Rating : 3A
- C E

Unfused

Bakelite Cigarette Lighter Plug

AP103



- Unfused
- Heat-resistant Bakelite body
- Designed for both Size A (φ 21.0mm) & Size B (φ 22.0mm) Sockets
- Amp Rating : 10A
- CE

Cigarette Lighter Plug

AP108



- Unfused
- Heat-resistant Bakelite head
- Designed for both Size A (φ 21.0mm) & Size B (φ 22.0mm) Sockets
- Amp Rating : 10A
- CE


Cigarette Lighter Plug with Quick Insert-and-Lock Terminals

AP106



- Unfused
- "Insert-and-Lock" terminals allowing quick wire assembly (as illustrated)
- Designed for Size A (φ 21.0mm) Sockets
- Amp Rating : 10A
- CE

Assembly Illustration of Quick Terminals :

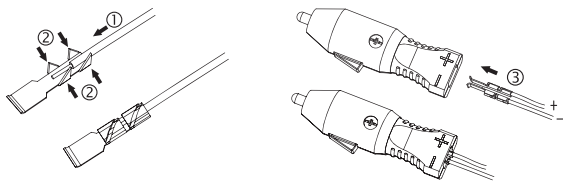

Cigarette Lighter Socket Splitters

Three Way Cigarette Lighter Sockets Splitter with Fuse

AP116



- 1 x Cig. Lighter Socket with retainer and 2 x DC Outlets
- 3 feet extension cord
- LED power indicator
- Replaceable AGC/JMC Fuses
- Plug designed for both Size A (φ 21.0mm) & Size B (φ 22.0mm) Sockets
- Wall-mount fixing panel included
- Amp Rating : 10A
- CE

Dual Port Cigarette Lighter Sockets Splitter with Fuse

AP117



- Replaceable AGC Fuses
- 1 to 2 Cigarette Socket Adapter
- LED power indicator
- Plug designed for both Size A (φ 21.0mm) & Size B (φ 22.0mm) Sockets
- Amp Rating : 10A
- CE

Three Way Cigarette Lighter Sockets Splitter (Unfused)

AP118



- 1 x Cig. Lighter Socket and 2 x DC Outlets
- 3 feet extension cord
- LED power indicator
- Plug designed for both Size A (φ 21.0mm) & Size B (φ 22.0mm) Sockets
- Wall-mount fixing panel included
- Amp Rating : 10A
- CE

Specialty Cigarette Lighter Plugs

Cigarette Lighter Plug Transformer (12V to 8V / 9V)

AP104A (DC 12V to 8V) / AP104B (DC12V to 9V)



- Replaceable AGC/JMC Fuses
- Converts DC 12V to 8V (AP104A) or DC 12V to 9V (AP104B)
- Output : DC Jack 3.5 x 1.3mm
- Designed for both Size A -(φ 21.0mm) & Size B (φ 22.0mm) Sockets
- Amp Rating : 1A
- CE

Cigarette Lighter USB Charger

AP133



- DC 5V USB Charger
- LED power indicator
- Designed for both Size A (φ 21.0mm) & Size B (φ 22.0mm) Sockets
- Amp Rating : AP133-1A : 1A
AP133-2A : 2A
- CE

Wiring for AP Series

Most of our AP products can be sold pre-wired, please refer to the following coding table for ordering details:


Coding Guide for pre-wired AP Cigarette Lighter Plugs

AP111□□ □□ - □□# - □□"

(1) (2) (3) (4)

(1) Cord Types		(2) Lead Process		(3) Wire Gauge		(4) Wire Length	
1	Straight Cord – 2C	C	Cut	□□#	AWG #	□□"	Length in inches
2	Coil Cord (Ribbon)	T	Tinned/Stripped	□□mm	Φ in mm	□□cm	Length in cm
3	Round Cord (choose one below)	Q	0.250"Female Quick Connect Terminal	(for cord type 3 & 4 only)		□□'	Length in feet
3A	Double Conductors	P	DC Plug (180°)			□□m	Length in meters
3B	Single Shielded		(choose one below)				
4	Coil Cord/ Round (choose one below)	P1	2.1 x 5.5mm				
4A	Double Conductors	P2	2.5 x 5.5mm				
4B	Single Shielded	P3	1.3 x 3.5mm				
5	Electronic Cord (choose one below)	P4	3 x 6.3mm				
5A	UL1015	R	DC Plug (90°)				
5B	UL1007		(choose one below)				
6	Internal Hook-up (2 x 0.75mm)	R1	2.1 x 5.5mm				
		R2	2.5 x 5.5mm				
		R3	1.3 x 3.5mm				
		R4	3 x 6.3mm				
		S	Cigarette Lighter Socket				
			(choose one below)				
		S1	AS201(Assembled)				
		S2	AS208(Molded)				
		J	DC Jack (choose one below)				
		J1	2.1 x 5.5mm				
		J2	2.5 x 5.5mm				


Cord Types




Straight Cord – 2C



Coil Cord



Round Cord



Coil Cord/ Round



Electronic Cord



Internal Hook-up

Lead Process



Cut



Tinned/ Stripped



0.250"Female
Quick Connect
Terminal



DC Plug (180°)



DC Plug (90°)



Cigarette Lighter Sockets



AS208



DC Jack

Cigarette Lighter Sockets

Normal Cigarette Lighter Sockets

Panel Mount Cigarette Lighter Socket and Retainer

AS202



- Metal case withstands high temperature
- Ceramic base with retaining spring
- Various customization options available (see below)
- Panel mount (screw type)
- Amp Rating : 20A

Coding Guide for AS202 with Accessories

AS202 comes with a variety of terminal configurations and accessories , please use the following table to pick one AS202 that fits your requirement most :

AS202□ - □ - □□
(1) (2) (3) (4)

(1) Terminals

- B Bullet Terminal (Φ=4mm)
- R Screw Nuts for Ring Terminals
- Q Quick Connect Terminal
- S Solder Terminal

(2) Mounting Panels

- A Mounting Panel Type A
- B Mounting Panel Type B
- C Mounting Panel Type C
- D Mounting Panel Type D
- E Mounting Panel Type E

Terminals



Bullet Terminal (Φ=4)



Screw Nuts for Ring Terminal



0.250" Quick Connect Terminal



Solder Terminal

Accessories



AS-RC1
Cover cap for AS202 and AS204



AS-IR1
Illumination Ring for AS202


Mounting Panels



Type A
L-shaped



Type B
Small plate



Type C
Small plate/half mount



Type D
Large panel



Type E
Large panel/half mount

Panel Mount Cigarette Lighter Socket and Retainer

AS204



- Metal case withstands high temperature
- Ceramic base with retaining spring
- Optional Rubber Cap (AS-RC1) available
- Panel mount (screw type)
- Amp Rating : 20A

In-Line Cigarette Lighter Socket

AS201



- DC Power Outlet
- In-Line socket with solder terminals
- Optional cover cap available
- Amp Rating : 10A
- For Wire Gauge : #16-#22 AWG

In-Line Cigarette Lighter Socket

AS208



- DC Power Outlet
- Molded wiring for better sealing
- Amp Rating : 10A
- For Wire Gauge : #18-#22 AWG

Panel Mount Cigarette Lighter Socket

AS217



- Economical DC Power Outlet
- Push-in panel mounting
- Anti-splash cap
- Bullet Terminal (Φ=4mm)
- Amp Rating : 10A

Marine Grade Cigarette Lighter Power Socket AS212

Best
Seller




- DC Power Outlet
- Panel mount and anti-splash cap available (see below)
- Flame retardant Nylon (glass fiber reinforced) enclosure
- Twist-and-Lock capability when used with AP121 (page 51)
- 0.250" Quick Connect Terminals
- Illuminated bottom plate for easy recognition at night (AS212L only)
- Rating : DC 9-36V 20A

Coding Guide for AS212 with Accessories

As our No.1 seller in AS series, AS212 comes with a variety of accessories that meet every customer's requirement, please use the following table to pick one AS212 that fits your requirement most:

AS212□□ - □
(1) (2) (3)

(1) Bottom Plate	(2) Mounting & Fixing Nuts	(3) Cap Labels
Standard	A Flat Panel Screw Nut	A Type A : Marine 12V
L Illuminated	B Flat Panel Quick Nut	B Type B : 12V
K Half-threaded Body	C L-Shaped Panel Screw Nut	
M Half-threaded & Illuminated	D L-Shaped Panel Quick Nut	
	E - Screw Nut	
	F - Quick Nut	



AS212 with illuminated bottom plate

Mounting Panels



AS-PL-1
Flat Panel
Flat panel for flush mount



AS-PL-2
L-shaped panel
Mounting Panel for 90° installation

Fixing Nuts




AS-NT-1
Screw Nut



AS-NT-2
Quick Nut
Fixing AS212 quickly

Mounting Options

AS212 can be mounted with several options (flush or surface mount) and accessories. See below for possible options.

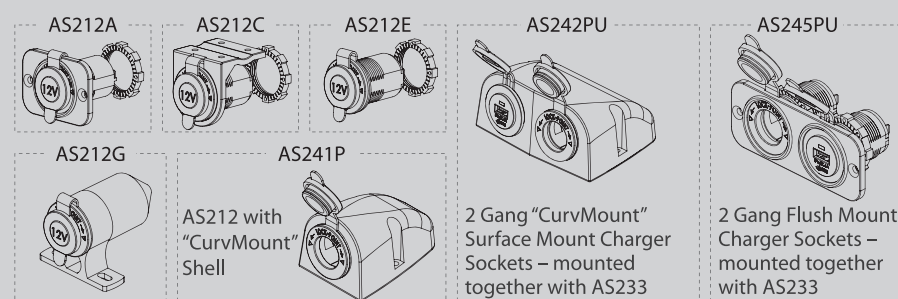

※ See page 66 for further information about the AS24X CurvMount Series.

Surface Mount Marine Grade Cigarette Lighter Socket AS212G



- Surface-mount allowing easy installation on any surface (no hole cut-out needed)
- Equipped with the best-selling AS212
- Pre-wired with 6" #16 AWG wire
- Dust and water-resistant cap
- Surface-mount mounting screws included
- UV stabilized PVC boot for better protection against water and dust from the bottom

Cigarette Lighter Socket with Panel and Rubber Cap AS215



- Economical DC Power Outlet
- Panel and rubber cap included
- 0.250" Quick Connect Terminals
- Amp Rating : 15A

Other Plugs & Sockets

DIN Plugs & Sockets

Universal DIN / Cigarette Lighter Plug

AP124



- Replaceable GBC Fuses
- Bayonet-catch DIN to Cigarette Lighter Plug adapter
- Designed for both Size A (ϕ 21.0mm) & Size B (ϕ 22.0mm) Cigarette Sockets
- Amp Rating : 16A

DIN Plugs & Sockets

DIN sockets, also known as Hella sockets , BMW sockets , Triumph sockets and Powerlet sockets , are connectors that are more suited to motorcycle use for its compact size , robust design and more secure and reliable connection than cigarette lighter sockets .

1-1/8" DIN/Merit Socket

AS216



- Standardized 1-1/8" cut-out (see page 64 for mounting accessories)
- Flame retardant Nylon (glass fiber reinforced) enclosure
- Water-proof PVC Cap (IP66)
- Panel mount with fixing screw nuts
- 0.250" Quick Connect Terminals
- Amp Rating : 15A

Panel Mount DIN Socket with Anti-splash Cap

AS213



- Robust Nylon (glass fiber reinforced) enclosure
- Anti-splash cap
- Panel mount with fixing screw nuts
- 0.250" Quick Connect Terminals
- Amp Rating : 15A

Deluxe Panel Mount DIN Socket with Anti-splash Cap

AS210



- Robust, elegant anodized aluminum body
- Spring-loaded dust-proof, anti-splash cap
- Panel mount with fixing screw nuts
- 0.250" Quick Connect Terminals
- Amp Rating : 15A

In-Line DIN Socket with Anti-splash Cap

AS214



- Flame retardant Nylon (glass fiber reinforced) enclosure
- Anti-splash cap
- 0.250" Quick Connect Terminals
- Amp Rating : 15A

Engel Plug & Socket

1-1/8" Engel Socket

AS218



Front View

- Standardized 1-1/8" cut-out (see page 64 for mounting accessories)
- Designed for Engel type sockets
- Water-proof PVC Cap (IP66)
- Flame retardant Nylon (glass fiber reinforced) enclosure
- 0.250" Quick Connect Terminal
- LED indication for easy identification at night
- Rating: DC 12V 15A / DC 24V 7.5A


Engel Plug

AP122



- Securing shroud that screws into Engel Type Sockets
- Easy to assemble solder-free screw-terminals for cable connection
- Rating DC 0-36V 15A

The 1-1/8" Sockets and Accessories Family












We all love to add a little bit more gadgets to our boats every now and then. That is why YIS Marine keeps introducing new sockets and accessories with standardized mounting dimension (the 1-1/8" system). All of these accessories come with the same threads and design language, and fit in the same panel cut-out, allowing them to fit each other perfectly when mounted together. See this page for coding and ordering guides

Product Codes

Product Code	Model #	Name
P 	AS212	Marine Grade Power Outlet (See page 56)
E 	AS218	Engel Socket (See 57)
D 	AS216	Din/Merit Socket (See page 57)
U 	AS233	1 Port USB Charger (See page 63)
V 	AS234	High Current 2 Port USB Charger (See page 63)
Y 	AS237	PD 45W USB Type C Charger (See page 62)

Product Code	Model #	Name
G 	SP-BG1	Battery Gauge (Voltmeter) (See page 58)
M 	SP-BG2	2 in 1 Battery Gauge (See page 59)
C 	SP-BG3	Digital Current Meter (See page 59)
B 	SP-BG6	Battery Level Voltage Meter (See page 60)
R 	SP-BG7	Digital Voltmeter with Rainbow Battery Level Display(See page 60)
Z 	AS238	PD 45W USB 1A+1C Charger (See page 62)

Mounting Options

Flush Mount	 Flat Panel: Model # + Suffix "-A" (ex. AS212-A)	 Socket only: Model #+ Suffix "-E" (ex. AS212-E)	 2 Gang Flat Panel: AS245 + Product Codes (See page 67)	
Surface Mount	 L-Panel: Model #+ Suffix "-C" (ex. AS212-C)	 Rocket Case: Model #+ Suffix "-G" (ex. AS212-G)	 1 Gang "CurvMount" Case: AS241 + Product Code (See page 66)	 2 Gang "CurvMount" Case: AS242 + Product Codes (See page 66)
Switch Panels	 Curved Panel Series SP3320 + Prod. Codes (See page 5)		 Wave Panel Series SP1220 + Prod. Codes (See page 10)	

Cigarette Lighter Outlet Extension Box


AS901 2-Way Cigarette Lighter Outlet Box with dual USB & Digital Voltage Meter

AS902 3 Port Cigarette Lighter Outlet Box


Watch Intro Video on Youtube




AS901

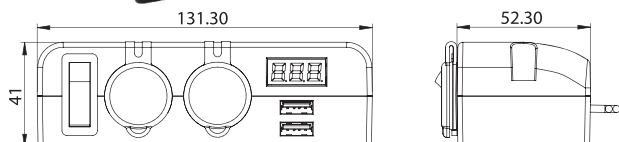

AS902

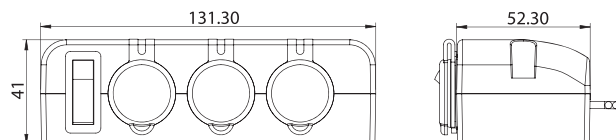

These cigarette lighter outlet box come with 2 or 3 ways standard cig. outlet. Advanced model AS901 comes also with 2 port USB charger and Voltmeter. Both model come with a convenient illuminated rocker switch style circuit breaker, providing not only 16A protection but also an easy way to control multiple devices at the same time. Suitable for 12V and 24V DC power source. Come with 3 feet of wires with circuit break protection. Mounting accessories included.



Switch Type Circuit Breaker (16A)

Specifications

- Rating | DC 12 / 24V 16A
- Cable | 18AWG / Black & Red Wires / Length 3 ft
- Built-in Circuit Breaker Switch (16A)

USB (AS901)



- Input DC 12/24V
- Output: DC 5V 3.1A Max (2.1A + 1A)

Digital Voltage Meter (AS901)

- Voltage Range | DC 2.50~30V
- Current Consumption | <30mA
- Sampling Rate | 5 readings/s
- Resolution | 0.01V (input <10V) / 0.1V (input >10V)

CurvMount Handle Bar Mount Sockets

AS251

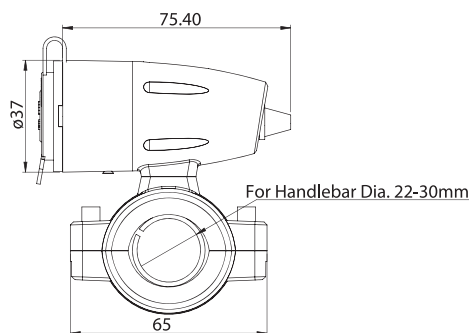

For Handlebar Dia. 22-30mm



Features

- Suitable for all of our 1-1/8" sockets
- Compatible with most motobike handlebar in the market (diameter: 0.8" -1.18")
- UV-stabilized enclosure material
- Water-tight gasket & water-resistant rubber cap included
- Robust Nylon (glass fiber reinforced) enclosure

Intro Video





CurvMount Surface Mount Sockets

AS241

AS241W

AS242

AS242W

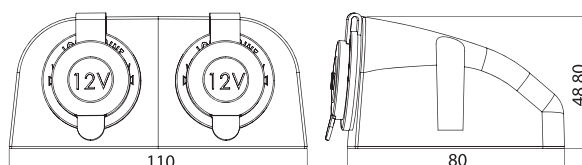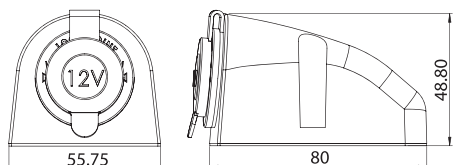

The CurvMount cases are fully covered surface mount cases designed for the 1-1/8" socket family. These cases are made of UV-stabilized plastic with water-tight gaskets and water-resistant caps, making them perfect for use with RV, caravans and yachts. They are easy to install and can be mounted vertically, horizontally or even underneath a dash.

Features

- Surface-mount allowing easy installation on any surface (no hole cut-out needed)
- UV-stabilized enclosure material
- Water-tight gasket & water-resistant rubber cap included
- Robust Nylon (glass fiber reinforced) enclosure

Popular CurvMount Models


Model	Socket
AS241P	Power Outlet
AS241U	1 Port USB Charger
AS241V	2 Port USB Charger
AS241D	Din/Merit Socket
AS241E	Engel Socket
AS241G	Digital Voltmeter
AS241M	Digital Voltage /Current Dual Meter

Model	Socket
AS242PP	Power Outlet + Power Outlet
AS242PU	Power Outlet + 1 Port USB Charger
AS242PV	Power Outlet + 2 Port USB Charger
AS242PD	Power Outlet + Din/Merit Socket
AS242PE	Power Outlet + Engel Socket
AS242VG	2 Port USB Charger + Digital Voltmeter
AS242XX	Any Socket from 1-1/8" family + Any Socket from 1-1/8" family




Flush Mount Panel for 1-1/8" Sockets

AS245

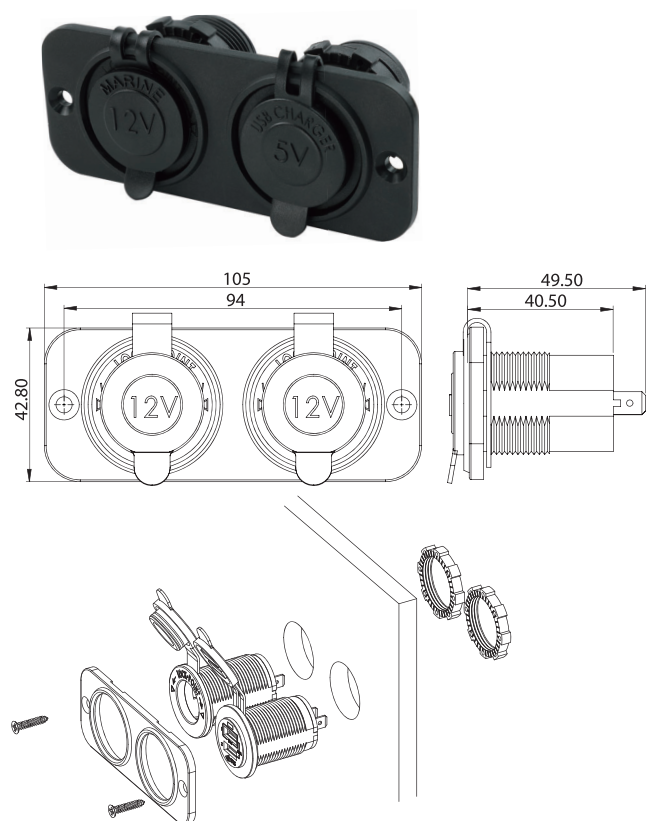

AS245: Decorative Panel mounted in front of sockets

AS246

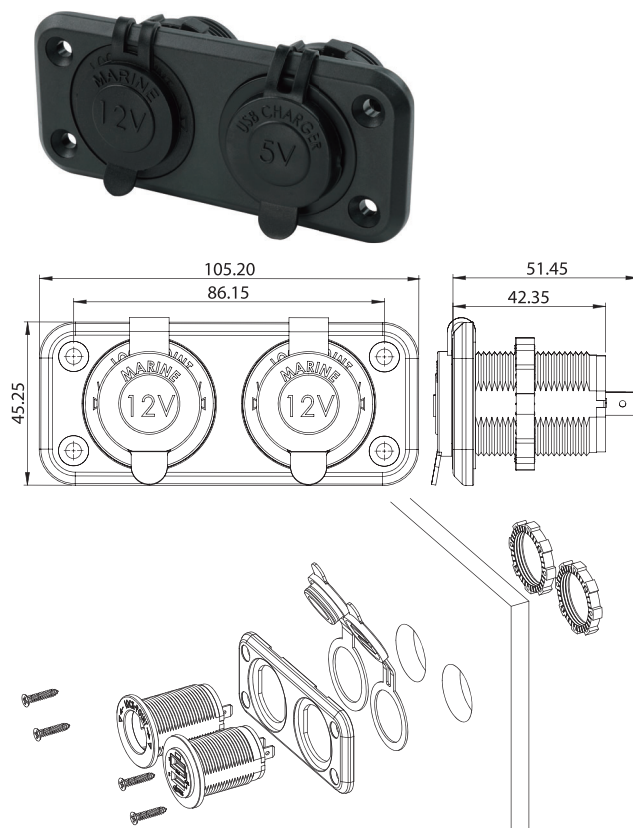

AS246: Panel mounted in back of sockets

Flush Mount Models

Model	Socket
AS245PP	Power Outlet + Power Outlet
AS245PU	Power Outlet + 1 Port USB Charger
AS245PV	Power Outlet + 2 Port USB Charger
AS245PD	Power Outlet + Din/Merit Socket
AS245PE	Power Outlet + Engel Socket
AS245VG	2 Port USB Charger + Digital Voltmeter
AS245XX	Any Socket from 1-1/8" family + Any Socket from 1-1/8" family





Features

- Flush Mount Panel – available in 1 gang or 2 gang
- UV-stabilized material
- Robust Nylon (glass fiber reinforced) material

Watch Intro Video on Youtube



Solar Ventilator for Marine, Caravans and Motorhomes SV002

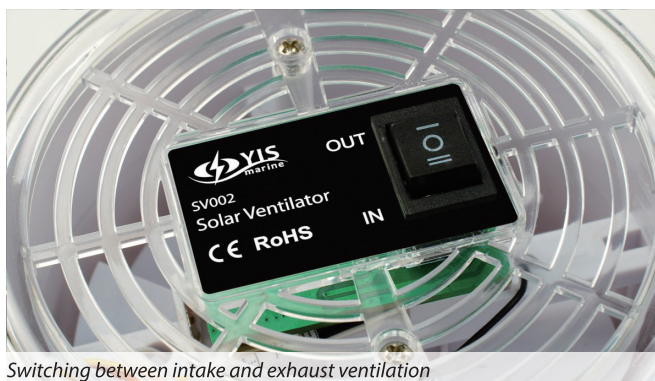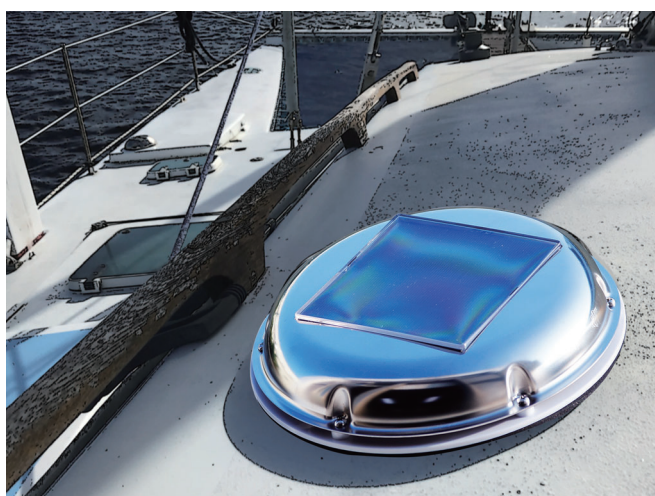


Switching between intake and exhaust ventilation

Features

- Low profile stainless steel solar vent for boats, caravans and motorhomes
- Fully automatic operation powered by solar energy with a solar panel and rechargeable Li-ion battery
- Built-in Battery - no external power or wiring required
- Switching between intake and exhaust ventilation
- Automatically restarts when sunrise after battery is drained
- Mechanical switch allows booting up automatically after sunrise

Specifications

- Solar cell capacity | Max. 1.8w / 3V / 600mA
- Fan motor operation voltage | DC 3V
- Battery | NiMH LSD AA, 1.2 V, 2400 mAh(not included)
- Mounting holes | Ø120 mm

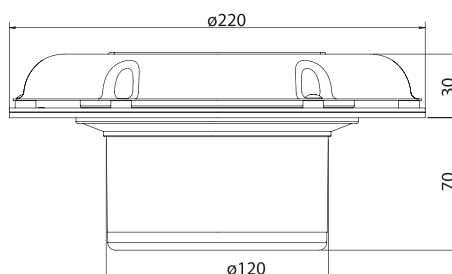

Automotive Electrical Accessories

Car Battery Clips Accessories

Lead Acid Battery Clip with Cable AE601-10



- Battery clip for lead acid battery
- UL2468 cord (8" bare wire)

Battery Clamp to Cigarette Lighter Socket (Coil Cord) AE602-25



- Battery clamps for car batteries
- Coil Cord: 0.12/30, 12 feet
- In-line cigarette lighter socket

Lead Acid Battery Clip with Coaxial DC Power Plug AE601-13



- Battery clip for lead acid battery
- UL2468 cord (8")
- In-line Molded DC Plug
 - Type A: ID 2.1mm OD 5.5mm
 - Type B: ID 2.5mm OD 5.5mm

Customized battery clips accessories AE60X



- Customizable wire and end processes (See p.9 for wiring options)
- You choice of battery clips or clamps (see below)

Lead Acid Battery Clip with Cigarette Lighter Socket AE601-15



- Battery clip for lead acid battery
- UL2468 cord (8")
- In-line cigarette lighter socket

Universal Dry Cell Battery Tester AE603




- Easy to use, portable battery tester
- Universal tester for dry cells(D, C, AA, AAA), 9V (Transistor) batteries, and button cells
- Voltage Range: 0-2V (for dry cells & button cells) / 0-9V (for 9V batteries)

Battery Clamp to Cigarette Lighter Socket (Straight Cord) AE602-15



- Battery clamps for car batteries
- Cable Spec: SPT-1, 18AWG, 1 feet
- In-line cigarette lighter socket

Available Battery Clips / Clamps:


<u>DC308</u>  20A / 65mm	<u>DC309</u>  10A / 53mm	<u>DC310</u>  30A / 75mm
<u>DC312</u>  30A / 75mm	<u>DC313</u>  15A / 51mm	<u>DC314</u>  30A / 70mm

Marine Grade Switches

Weather-proof switches specially designed for outdoor environments

IP67 Water-resistant Sealed Rocker Switch C-7 Series

PATENTED
TW,CH

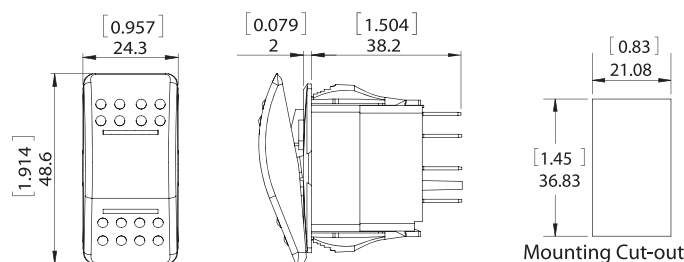

Product Series		
Product ID	Type	Switch Function
C-7124	SPST	(ON)-OFF
C-7137	SPDT	(ON)-OFF-(ON)
C-7144	DPST	(ON)-OFF
C-7167	DPDT	(ON)-OFF-(ON)
C-7231R	SPST	ON-OFF
C-7251R	DPST	ON-OFF
C-7243RR	SPDT	ON-OFF-ON
C-7273RR	DPDT	ON-OFF-ON
C-7246RR	SPDT	(ON)-OFF-ON
C-7276RR	DPDT	(ON)-OFF-ON
C-7272RR	DPDT	ON-ON

※ Product ID are for Switch Body only, for full switch with actuators, add suffix like "-H1W" (see Website)



Features


- Fit popular Contura style switch mounting
- Interchangeable actuators with various options
- Available in customized switch function, illuminating and other configurations
- LED illuminated (DC12V/ 24V dual voltage)
- PC Terminals (0.250" Quick Connect Terminals)
- IP67: Water proof even under temporary water immersion
- Exclusive advanced water-tight sealing design (Patented)



IP67 Water proof even under temporary water immersion

Specifications

- Rating | DC 12V 20A 24V 10A
- Electrical Life | 20,000~50,000 switch function dependent
- Note | IP67 Patented in TW CH

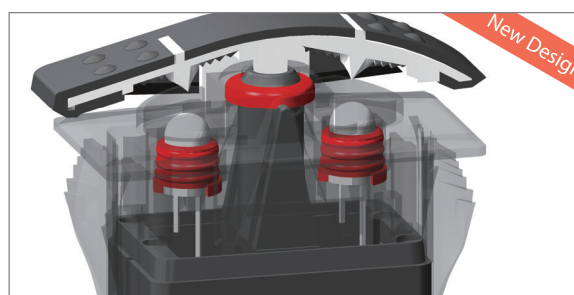


Advanced water-tight sealing design (Patented)

Actuator Removal Tool for C-7 Switches C7-RM-1



How to use




- Used to change C-7 switch actuators
- Anti-slip grip design

Hole Cover C7-HC-1



- Hole Cover for spare switch slots
- Easy snap-in design

Connector Housing C7-CA-1



- Black Plastic Connector
- Simple installation



Actuator for C-7 Switch C7A-XXX



C7A-H1W C7A-H3W C7A-H3R-25

※ Check coding guide online:
https://www.yismarine.com/en/product/Marine_Rocker_Switches-C-7_Actuators.html



- Available stand-alone without switch body
- Available in various colors, lens configurations and printing options
- Lens color available in white, red, amber, green and blue
- Customizable silkscreen printing or label stickers on square lens available

Laser Etched Contour C-7 Actuator C-7251XYS ON-OFF C-7254XYS (ON)-OFF

PATENTED
TW,CH


※ Check full patterns online:
https://www.yismarine.com/en/product/Marine_Rocker_Switches-C-7_Laser_Actuators.html



- Premium feeling and backlight effects
- YIS exclusive trendy actuator shape (Patented)
- Laser etching technology allowing even very complicated patterns
- Illuminates on both symbol and label (label illumination configurable to be always on or power indication)
- 100% customizable with low MoQ

※ X Stands for Symbol illumination LED color, and Y for Label LED Color (X is ON only when switch is ON; Y is configurable externally.)

Mounting Panel for C-7 Series C7-PA-1 (End Frame) C7-PA-2 (Middle Frame)

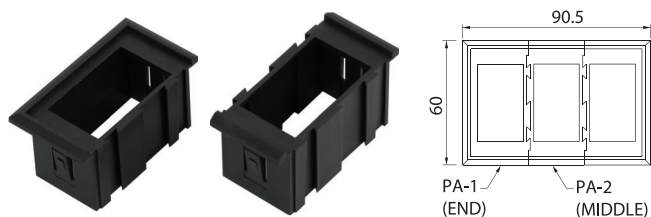

- Allows mounting of multiple switches together
- Cascade as many switches as you like
- Push-in installations

Label Stickers for C-7 Switch with square lens C7-ST-1



- 60 pcs assorted label stickers
- For use with Actuators with white square lens C7A-H3W
- Sold separately



Digital Battery Gauges – Switch Mount SP-BG4 Digital Voltmeter SP-BG5 Digital Voltage & Current Dual-meter




※ Fit popular Contura style switch mounting (See page 58-59)

High Power 2 Port USB Charger – Switch Mount AS235-4.8A (2.4A + 2.4A)



※ Fit popular Contura style switch mounting (See page 63)

IP55 Water-resistant Rocker Switch
C-61/C-62 Series

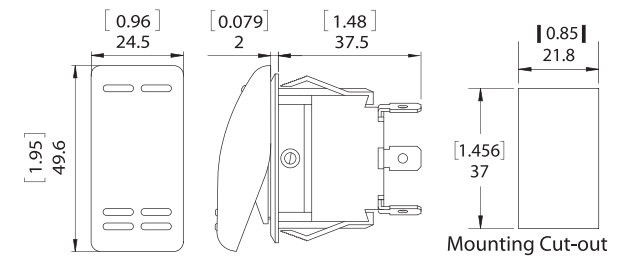

Product Series		
Product ID	Type	Switch Function
C-6124P	SPST	(ON)-OFF
C-6136P	SPDT	(ON)-OFF-ON
C-6137P	SPDT	(ON)-OFF-(ON)
C-6144P	DPST	(ON)-OFF
C-6166P	DPDT	(ON)-OFF-ON
C-6167P	DPDT	(ON)-OFF-(ON)
C-6231P	SPST	ON-OFF
C-6253P	SPDT	ON-OFF-ON


Features

- Robust design to withstand outdoor environments
- Easy-to-press, stylish curved actuator design
- Available in various switch functions and illuminating configurations
- PC Terminals (0.250" Quick Connect Terminals) or Screw Terminals
- LEDs or Lamps available for illuminated C-62 series
- IP55 : Water projected in jets from any direction shall have no harmful effects



Specifications

- Rating | DC 12V 16A 24V 10A
- Electrical Life | 20,000 make and break cycles at full load

Mounting Panel for C-6 Series

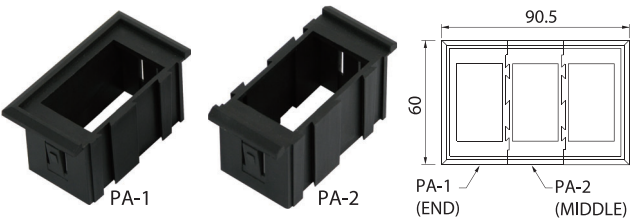

Toggle Switch
C-65/C-66 Series

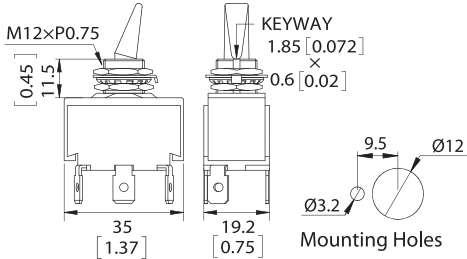

Product Series		
Product ID	Type	Switch Function
C-6521P	SPST	ON-OFF
C-6524P	SPST	(ON)-OFF
C-6537P	SPDT	(ON)-OFF-(ON)
C-6631P	SPST	ON-OFF
C-6634P	SPST	(ON)-OFF
C-6647P	SPDT	(ON)-OFF-(ON)

Features

- Available in various switch functions, illuminating and other configurations
- Current rating up to 16A (@12V DC)
- Self-illuminating handle bar (C-66 only)
- Heat-resistant bakelite switch body
- Available in PC (Quick) Terminals or Screw Terminals
- Hidden color lens allowing up to three different illuminating colors(for illuminated C-66 series)

Specifications

- Rating | DC 12V 16A 24V 10A
- Electrical Life | 20,000 make and break cycles at full load

C6653L-CRG: Tri-color illuminated switch ON-OFF-ON




Rubber Boot
C6-RB-2



- Water-proof, dust proof rubber boot
- Screw Nuts: M12
- Available in clear/black color

Toggle Switch with On indication LED
T-1341

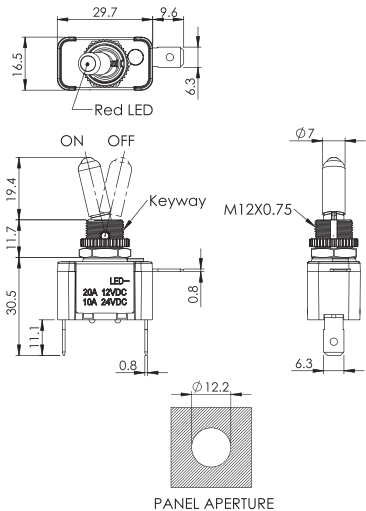


Features

- 3P SPST ON-OFF Toggle Switch with LED indicated
- 3 Quick-connect terminals: 6.3mm*0.8mm
- Rating: 20A 12VDC, 10A 24VDC
- Mechanical Operating Life: 50,000 cycles
- Electrical Operating Life: 25,000 cycles at full load
- Ingress Protection: IP40
- Mounting holes: 12.2mm Diameter 6.0mm max. Thickness

Premium Heavy Duty Toggle Switch Series

T-133X Series

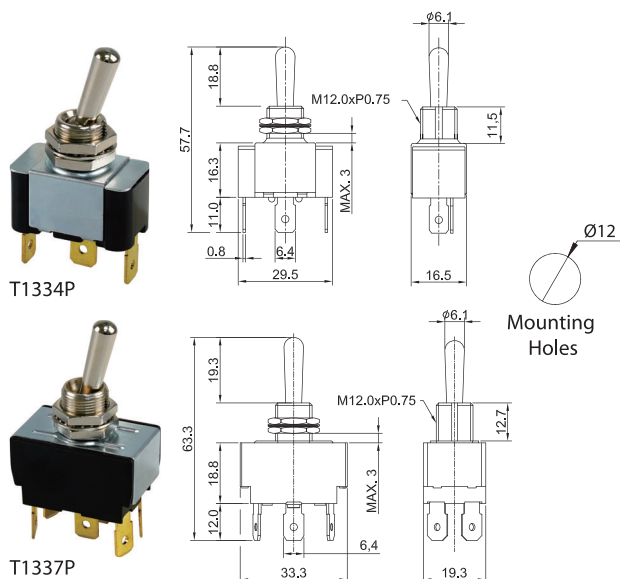


Features

- Product design matches leading brands switch allowing direct replacement
- More Premium feeling and texture than T1325 Series
- 100% Made in Taiwan

Product Series		
Product ID	Type	Switch Function
T-1332P	SPST	ON-OFF
T-1332PM	SPST	(ON)-OFF
T-1334P	SPDT	ON-OFF-ON
T-1334PM1	SPDT	(ON)-OFF-ON
T-1334PM2	SPDT	(ON)-OFF-(ON)
T-1337P	DPDT	ON-OFF-ON
T-1337PM1	DPDT	(ON)-OFF-ON
T-1337PM2	DPDT	(ON)-OFF-(ON)

Heavy-Duty Toggle Switch

T132X Series

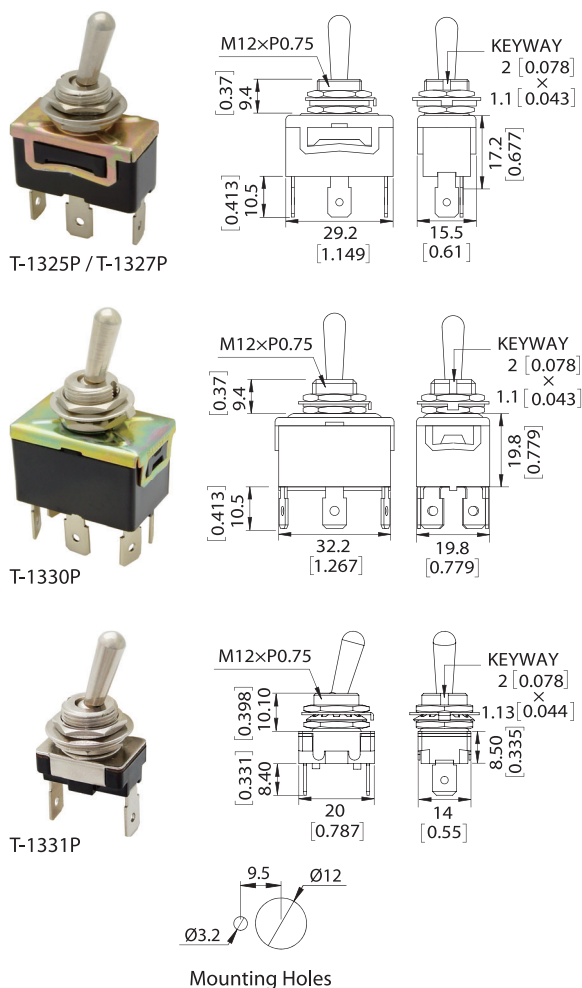

Features

- Current rating up to 15A (@12V DC)
- Robust and durable toggle design
- Available in PC (Quick) Terminals or Screw Terminals
- Series-specific nameplates and rubber boot available
- Short Body design saves mounting space (for T-1331 series)

Specifications

- Rating | DC 12V 15 A 24V 10A
- Electrical Life | 50,000 make and break cycles at full load

Product Series		
Product ID	Type	Switch Function
T-1325P	SPST	ON-OFF
T-1325PM	SPST	(ON)-OFF
T-1327P	SPDT	ON-OFF-ON
T-1327PM1	SPDT	(ON)-OFF-ON
T-1327PM2	SPDT	(ON)-OFF-(ON)
T-1330P	DPDT	ON-OFF-ON
T-1331P	SPST	ON-OFF
T-1331PM	SPST	(ON)-OFF

Rubber Boot

T-RB-3



- Water-proof, dust proof rubber boot
- Screw Nuts: M12
- Available in clear/black color

Watch Intro Video on Youtube




Large Current (20A) Anti-Vandal Stainless Steel Push-Button Switch with LED Ring

PB-44xx Series - with LED light ring

PB-45xx Series - with backlight labels

PATENTED
US,TW,CH

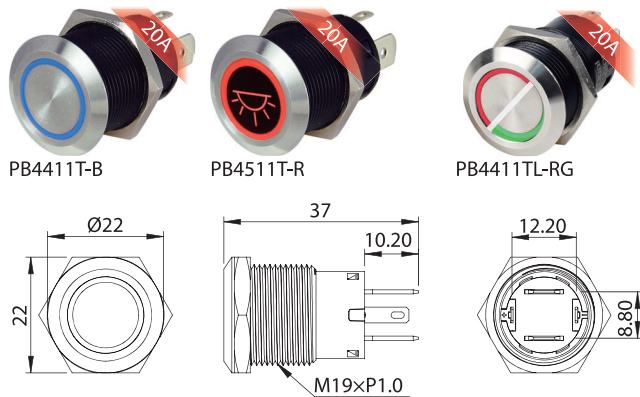

Product Series		
Product ID	Voltage Rating	Switch Function
PB-4411TL-X	DC 12V	ON-OFF (Latching)
PB-4511TL-X		
PB-4411T-X	DC 12V	(ON)-OFF (Momentary)
PB-4511T-X		
PB-4411TL-X-24V	DC 24V	ON-OFF (Latching)
PB-4511TL-X-24V		
PB-4411T-X-24V	DC 24V	(ON)-OFF (Momentary)
PB-4511T-X-24V		

※ X Stands for Symbol illumination LED color.
R : Red / B : Blue / W : White / G : Green

Features


- Market-leading 20A Capability (No more relays!)
- Same compact size as mainstream anti-vandal switches in market (PB-42 Series)
- Durable CNC Stainless Steel (SS316) housing
- 0.250" Quick connect terminals
- LED light rings configurable to be push-on (power indication) or always on (back lighting)
- IP67 – protected even under temporary water immersion

Additional Features for PB45xx

- Backlight button version
- 5 pcs PC membrane label stickers included
- Additional 40pcs assorted label stickers sold separately (PB-ST-1)



5 pcs labels included with PB45xx series

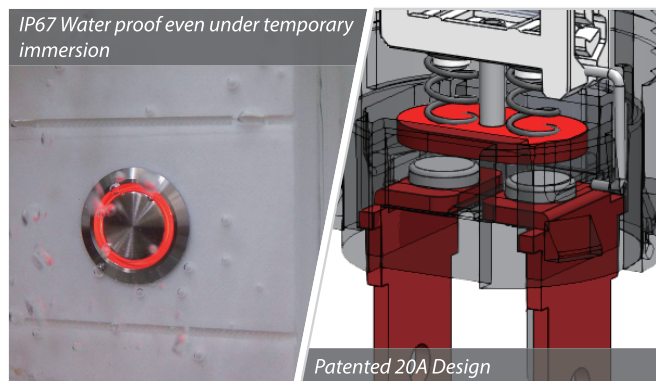

Specifications

- Rating | DC 12V 20A / DC 24V 10A
- Electrical Life | > 20,000 cycles
- Operation Temperature | -20°C ~ +55°C
- Note | Patented in Taiwan(M558458) & China(ZL2018202565058) & USA(US10297404B1)



Label stickers for PB45xx Series


PB-ST-1



- 40 pcs assorted label sticker
- Scratch resistant, water-proof PC membrane material
- Customized version also possible
- Back printing for better durability

Latching Cable set pre-assembled for PB44/PB45xx Series



PB-CA-4

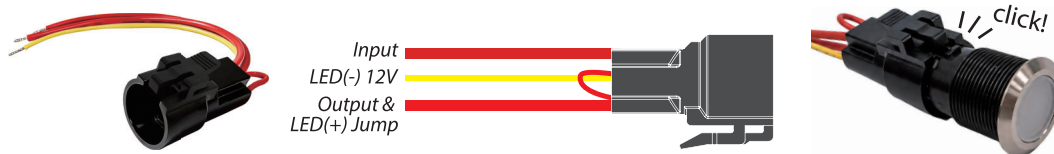

- Upgraded "Latching" design from PB-CA-2 (work only with new switch housing after late 2025)
- Cable set pre-assembled in factory or included as accessories
- Jumper cable allowing configuration of LED Ring to be "Push ON" or "Always ON"
- (Optional) 24V LED negative cable kit allows 12V switch to be applied on 24V applications (PB-CA-4-24V)
- UL1015 18AWG cable capable of carrying 20A current, Cable length: 6" (15cm) (Customizable)

Anti-Vandal Stainless Steel Push-Button Switch with LED Ring

PB-42xx Series

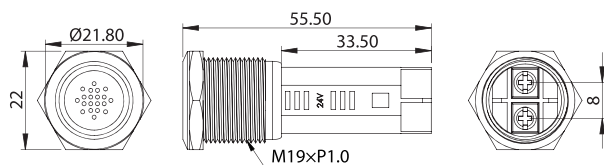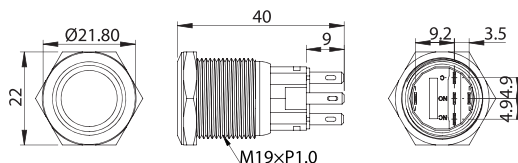

Specifications


- Rating | DC 12V 5A / DC 24V 5A
- Electrical Life | > 50,000 cycles
- Operation Temperature | -20°C ~ +55°C

Product Series			
Product ID	Voltage Rating	LED Color	Switch Function
PB-4212TL-R	DC 12V	Red	ON-OFF (Latching)
PB-4212T-R	DC 12V	Red	(ON)-OFF (Momentary)
PB-4212TL-B	DC 12V	Blue	ON-OFF (Latching)
PB-4212T-B	DC 12V	Blue	(ON)-OFF (Momentary)
PB-4212TL-R-24V	DC 24V	Red	ON-OFF (Latching)
PB-4212T-R-24V	DC 24V	Red	(ON)-OFF (Momentary)
PB-4212TL-B-24V	DC 24V	Blue	ON-OFF (Latching)
PB-4212T-B-24V	DC 24V	Blue	(ON)-OFF (Momentary)
PB-BZ-1R	DC 12V	Red/flashing	Buzzer

- Up to Double Pole NO/NC/COM Terminals (5 or 8 Terminals)
- Durable stainless steel housing and button
- LED light rings configurable to be push-on (power indication) or always on (back lighting).
- IP67 – protected against even under temporary water immersion (IP50 for the Buzzer PB-BZ-1R)

Cable set pre-assembled for PB42xx Series



PB-CA-3



- Cable set pre-assembled in factory or included as accessories
- Cable length: 150mm

Starter Push-Button Switch

PB-4071



Features

- Quick terminal blades
- High current push button switch
- Water-resistant cap available
- Rating: AC 125V 15A / 240V 10A

Rubber Boot

PB-RB-1




YIS Marine LED Lights for Boats

Next Generation of Marine Lighting

LED is the next generation of lighting. With its lower power consumption, vibration-proof and better durability comparing to traditional halogen lights, the LED lights are an ideal solution on the board. The performance of LED lights, however, is based heavily on their electronic circuit design, which is very different from traditional luminaire using incandescent lights. With more than 20 years of expertise in automotive electronics designing and manufacturing, YIS Marine is able to provide high performance LED light products with competitive costs.

Low Power Consumption

Low power consumption means longer cruising time on the sea. As of 2015, the latest LED technology can generate around 80-100 lumens per watt, while the traditional incandescent lights generate less than 20 lumens per watt. In fact, EU has banned use of incandescent lights since 2012, and planned to ban the halogen lights due to their low lighting efficiency.

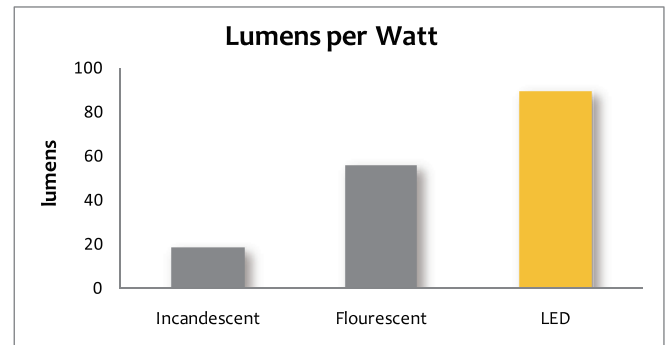


Life & Durability



Typically LED's has a lifespan for about 20,000 – 50,000 hours, more than 20 times of that of an incandescent light. LED also has no filaments to break, and thus are very vibration proof. Most of YIS Marine lights are built in one part without replaceable lamps, and some outdoor models are fully sealed to ensure great durability against moisture and shocks.

Electronic Circuit Design



Electrical systems on the boats are very complex and sophisticated systems. DC power supply on board can vary from 10 – 15V under different circumstances (for a 12V system). That's why almost all of our LED lights come with Constant-Current technology that keeps the LED output stable despite the input voltage variation. As radio communication is crucial on the boats, all of our LED lights also have EMI suppression design and approved by the EU standards **CE**.

Cost

The cost of LED has been dropping consistently each year. This, combining with its steady growth in lighting efficiency, makes LED lights become more and more suitable to replace traditional incandescent lights used on the boat. YIS Marine re-design LED lights on board by removing or modifying parts that were necessary for halogen lights but no longer needed for LED lights. By designing lights exclusively for the LED technology, we are able to build cost-effective LED lights with much better performance than traditional halogen lights.


LED Terminologies

LED is the next generation of lighting. With its lower power consumption, no heat radiation and better durability comparing to traditional halogen lights, the LED lights are an ideal solution on the board. Here is some of the important terminologies of LED lights:

Color Temperature (Unit: K (Kelvin))

Color temperature is conventionally stated in Kelvin (K), the unit of absolute temperature. The color temperature is the temperature that makes an ideal black body radiator radiate comparable hue as the light source.

Usually, color temperatures over 5,200K are called cool colors, color temperature below 3500K are called warm colors.

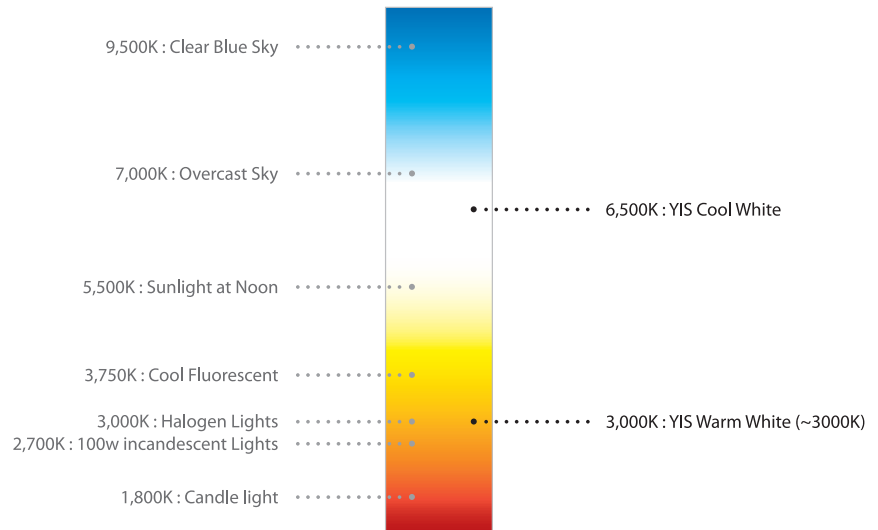

Luminous Flux (Unit: lm(lumens))

The total amount of light emitted from a lamp. The higher lumen is, the more intense the light output. Luminous Flux does not vary with distances.

Illuminance (Unit: Lux)

Illuminance is the total luminous flux falling on a surface. It shows the intensity of the incident light. Mathematically,

$$\text{Illuminance (Lux)} = \text{Lumens (lm)} / \text{area(m}^2\text{)}$$

where area is the illuminated area of the light source. The farther the surface are away from the source, the larger the area would be, and hence the smaller illuminance, while the Luminous Flux remains the same.

Example:

If a light fixture with 100 lumens lights up an area of 1 square meter, the Illuminance would be 100 lux. If, however, the same fixture lights up 10 square meters (at a farther place), the illuminance would be reduced to only 10 lux.

Types of LEDs

SMD LEDs (Surface Mounted Devices)



SMD LEDs are bright and economical LEDs that are mounted on PC Boards and hence are easy for mass production. With the SMD LED becoming brighter and brighter, they have become mainstream of marine lights.




SMD LEDs

High Power LEDs



High power LEDs use from 1 watts to as much as 500 watts in a single package and thus has the ability to provide unparalleled brightness within limited area comparing to SMD LEDs. The heat dissipation issue is an important factor in designing High-Power LED lights. YIS Marine utilizes all-aluminum LED holders/enclosures for our High Power LED product lines.



High Power LEDs

WaveLED Marine LED Lights Series

Watch Intro Video on Youtube




Unique Marine Wave-shaped LED Lights from YIS

WaveLED Ceiling Light

LC004W

WaveLED Ceiling Light - Dual Color

LC004WB / LC004WR

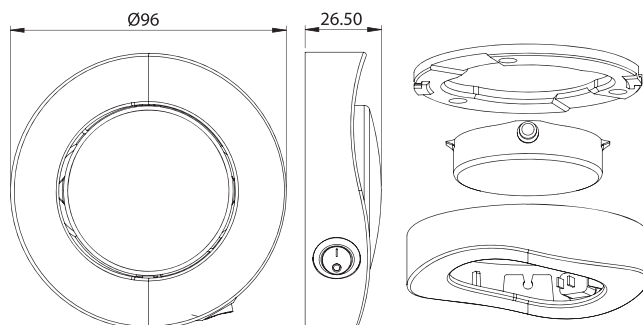

Features

- Unique wave shape enclosure design
- Easy-to-install bayonet latch design
- Matte surface allows soft and smooth light output
- Completely sealed LED Module
- Built-in ON-OFF switch
- Adjustable light angle
- Constant-Current technology design ideal for marine lighting
- DC 12V-24V dual voltage rating
- 2 different enclosure colors available


Additional Features for LC004WB/LC004WR

- White/Blue or White/Red dual light color
- Cost-effective built-in ON-OFF-ON switch

Specifications


- Lighting Source | SMD LED x 6 (120lm)
- Color Temperature | 2900-3200K (Warm White)
- Voltage Rating | DC 12-30V
- Power Consumption | 1.5W
- Note |

Dual Color LC004WB / LC004WR

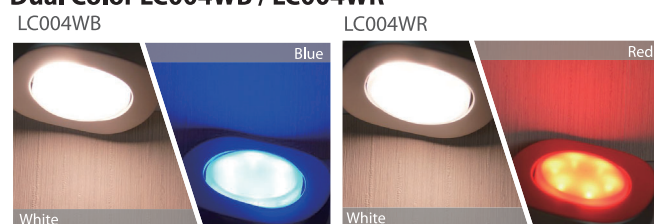

WaveLED Ceiling Light / Spotlight with High Power LED

LC003-3x1W

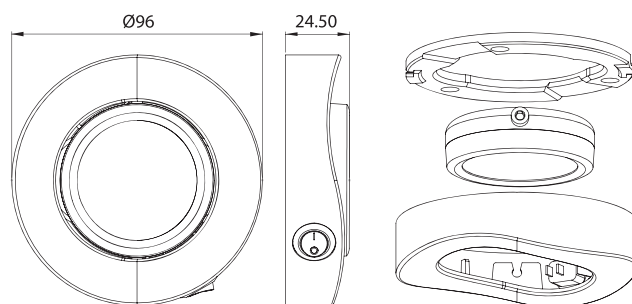

Features

- Unique wave shape enclosure design
- Easy-to-install bayonet latch design
- Specially designed optical lens provide bright and focused spot light
- 3 x 1 Watt super bright High Power LED
- Built-in ON-OFF switch
- Adjustable light angle
- DC 12V-24V dual voltage rating

Specifications

- Lighting Source | High Power LED (1W) x 3
- Color Temperature | 3000-3300K (Warm White)
- Voltage Rating | DC 12-30V
- Power Consumption | 3.24W
- Note |



Watch Intro Video on Youtube



DishLED Dimmable Ceiling Light with Touch Button

LC005-95 / LC005-150

LC005T-95 / LC005T-150 (Tri-color)

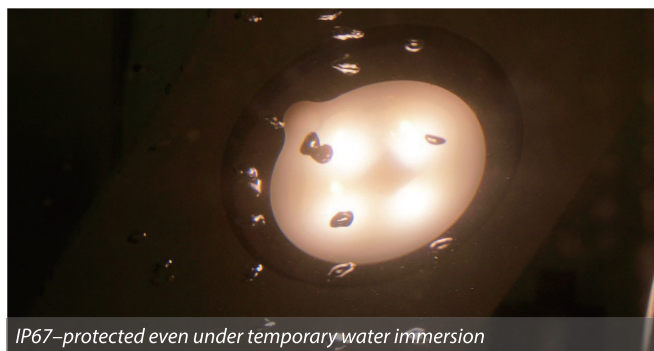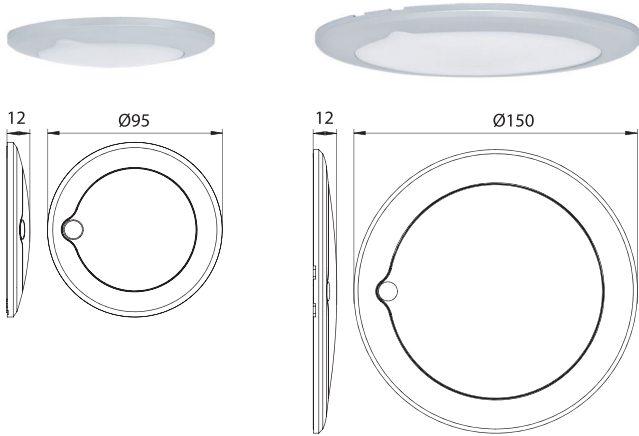

LC005 are ultra-thin ceiling lights with dimmable function and a low profile touch button. They have the same un-intrusive like outlook as the recessed light fixtures yet are also as easy to install as any other surface mount ceiling lights. It can be turned on/off or dimmed linearly with a simple touch, and the memory function allows it to memorize previous brightness level when turned back on. The cut-off memory feature allows multiple DishLEDs to be controlled centrally by a single switch. The completely sealed design made it perfect for use in marine applications (IP67).

Features

- Ultra-thin surface mount (only 12mm in thickness)
- Low profile touch button
- Linear (non-stop) dimming allowing brightness adjustment to any desirable level (10-100%)
- Memory feature – remembering previous brightness level when turned back on
- Power cut-off memory feature allowing central control of several DishLED lights
- Constant-current technology design ideal for marine lighting
- Completely sealed (IP67) – protected even under temporary water immersion

Additional Features for LC005T (Tri-color)

- 3 different color temperatures (3000 to 6500K)

Specifications


- Light Source | Super Bright SMD LED x 4 (200lm)-LC005-95
Super Bright SMD LED x 12 (400lm)-LC005-150
- Color Temperature | 3000 – 3300K (Warm White)
- Voltage Rating | DC 9 – 30V (Multi-volt)
- Power Consumption | 2.4W (LC005-95)
4.5W (LC005-150)
- Note | IP67

LC005T Color Temperature Selectable (3000K-4000K-6500K)

- Light Source | Super Bright SMD LED x 8 (LC005T-95)
Super Bright SMD LED x 20 (LC005T-150)
- Color Temperature | 3000 - 3300K (Warm White) / 4000 - 5000K (Neutral White) / 6500K (Cold White)
- Voltage Rating | DC 9 – 30V (Multi-volt)
- Power Consumption | 6W (LC005T-150)
- Note | IP67

WaveLED Marine Reading Light Series

Watch Intro Video on Youtube



Cost-effective Reading Lights with Trendy Design




The WaveLED reading light series are modern design, good performance and cost-effective LED reading lights. While High Power LED version provides unparalleled focused light output, the SMD version can provide wider angle and smoother output with much lower cost. There is also a dimmable SMD LED version with touch button. With economical plastic housing, built-in switches, and its easy-to-install feature, this series is ideal for sale in the aftermarket.

Features

- Unique wave shaped base design
- New screw-free easy-to-install bayonet catch design
- Built in switch for easy wiring
- Adjustable light angle
- 3 Versions available: high power LED, cost-effective SMD LED, and dimmable touch button version




3 Versions of WaveLED reading lights





High Power LED with Condenser Lens

High power LED provides unparalleled brightness through the ultra clear condenser lens, the high power LED version can light up as far as 5 meters away, suitable for reading or spotlight applications.



SMD LEDs with matte lens



SMD LED version is a wide angle, lower cost alternative. This version is also more suitable for reading at a closer range.



Dimmable SMD LED version with TOUCH button

SMD LED version with additional dimming feature and water-resistant touch button design.

WaveLED Cabin / Reading Light LR002

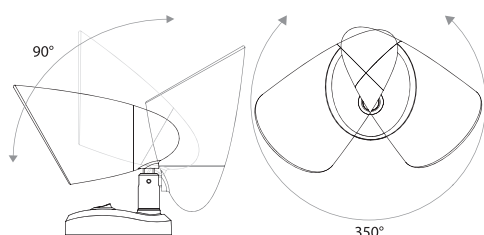

Replaceable G4 LED Bulbs for LR002

LR-G4-2W



Features


- New screw-free bayonet catch wave base design
- Economical, light weight PolyCarbonate shielding
- Replaceable G4 LED bulbs
- Built-in ON-OFF switch
- 350° rotatable horizontally and 90° vertically leaving no blind spot

Specifications

- Lighting Source | G4 LED Bulbs 2W (200-230lm)
- Color Temperature | 2800-3200K (Warm White)
- Voltage Rating | DC 10 - 30V
- Current Consumption | 2W
- Note | CE

WaveLED Reading Light

LR001-1W / LR001-SMD (SMD Version)

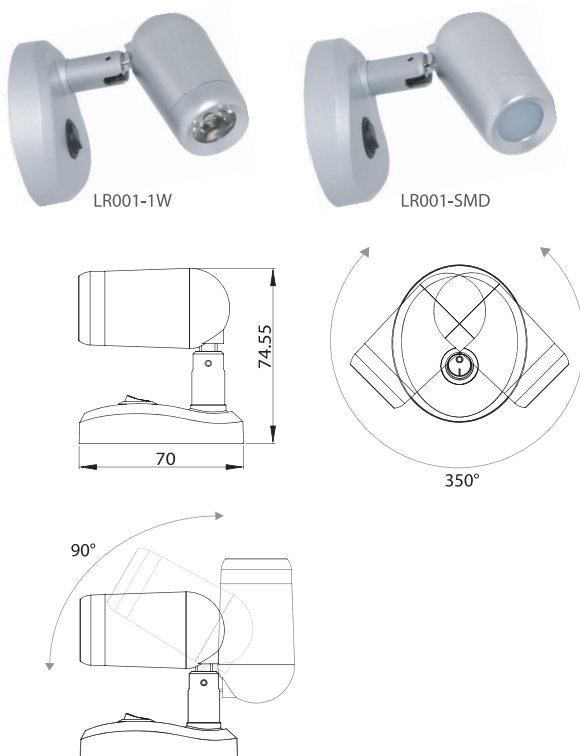

Features

- Compact size with powerful output
- New screw-free bayonet catch wave base design
- 350° rotatable horizontally and 90° vertically leaving no blind spot
- Constant-Current technology design ideal for marine lighting
- Dual Voltage rating for both 12V & 24V systems

Specifications

LR001-1W(High Power LED)

- Lighting Source | High Power LED (1W) x 1 with condenser lens
- Color Temperature | 3000-3300K (Warm White)
- Voltage Rating | DC 9-30V
- Power Consumption | 1.32W
- Note |


LR001-SMD

- Lighting Source | 8 super bright SMD LED (160lm)
- Color Temperature | 2900-3200K (Warm White)
- Voltage Rating | DC 10-30V
- Power Consumption | 1.68W
- Note |

WaveLED Gooseneck Reading Light

LR011-1W-130 / LR011-1W-330

LR011-SMD-130 / LR011-SMD-330 (SMD Version)

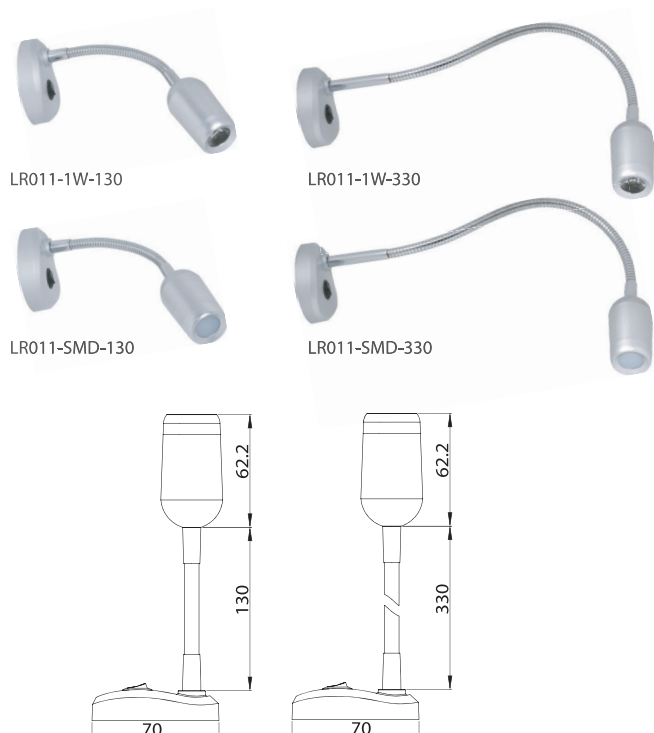

Features

- Compact size with powerful output
- New screw-free bayonet catch wave base design
- Bendable gooseneck allows more freedom of light positions
- Constant-Current technology design ideal for marine lighting
- Dual Voltage rating for both 12V & 24V systems

Specifications

LR011-1W(High Power LED)


- Lighting Source | High Power LED (1W) x with condenser lens
- Color Temperature | 3000-3300K (Warm White)
- Voltage Rating | DC 9-30V
- Power Consumption | 1.32W
- Note |

LR011-SMD

- Lighting Source | 8 super bright SMD LED (160lm)
- Color Temperature | 2900-3200K (Warm White)
- Voltage Rating | DC 10-30V
- Power Consumption | 1.68W
- Note |



LED Reading Light with PD18W USB-C Socket LR004D / LR014D-S

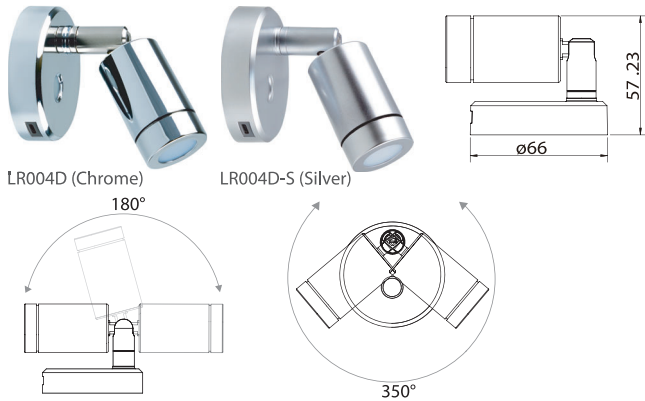

Features


- Chrome plated plastic housing for premium feeling with low cost (also available in Silver painted finish)
- Compact size with powerful 160lm output
- New USB Type-C PD18W Charging Socket on base
- Screw-free bayonet catch base design
- Low profile touch button design
- Constant-Current technology design ideal for marine lighting
- Dual voltage rating for both 12V & 24V system
- Linear (non-stop) dimming allowing brightness adjustment to any desirable level (10-100%)

Specifications

- Lighting Source | 4 x super bright SMD LED (160lm)
- Color Temperature | 3000 - 3300K (Warm White)
- Voltage Range | DC 10V - 30V
- Power Consumption | 1.68W (USB not charging) 22W Max (USB Charging)
- Note | **CE**



LED Reading Light with USB Charging Socket LR003D / LR013D-130 / LR013D-330 (Dimmable)

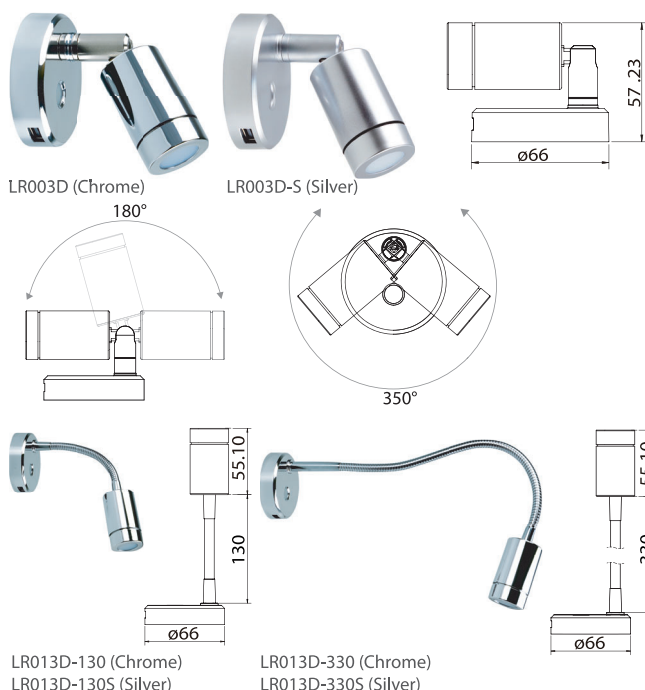

Features

- Chrome plated plastic housing for premium feeling with low cost (also available in Silver painted finish)
- Compact size with powerful 160lm output
- Convenient 1 port 2.4A USB Charge socket on base (Compatible with latest iPad)
- Screw-free bayonet catch base design
- Low profile touch button design
- Constant-Current technology design ideal for marine lighting
- Dual voltage rating for both 12V & 24V system
- Linear (non-stop) dimming allowing brightness adjustment to any desirable level (10-100%)

Specifications


- Lighting Source | 4 x super bright SMD LED (160lm)
- Color Temperature | 3000 - 3300K (Warm White)
- Voltage Range | DC 10V - 30V
- Power Consumption | 1.68W (USB not charging) 15.5W Max (USB Charging)
- Note | **CE**

Marine LED Courtesy Lights

LED Step Lights / Courtesy Light with Stainless Steel Faceplate

LS101(Round)

LS111(Square)

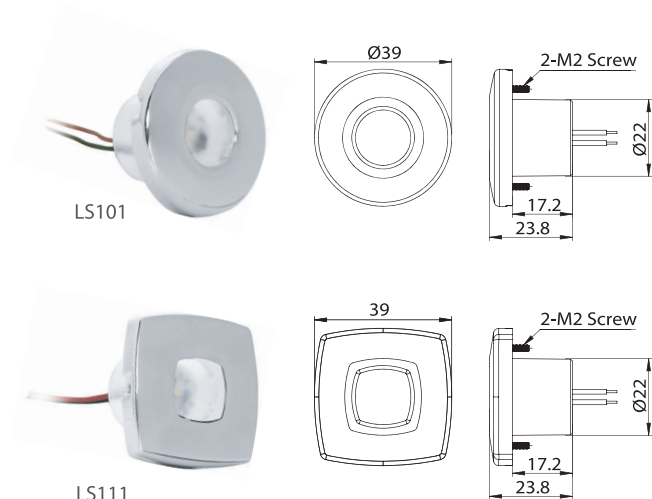


Features

- Polished marine grade stainless steel (SAE 316) faceplate
- Completely sealed – completely waterproof even undertemporary water immersion (IP67)
- Compact size and easy to install
- Matte Surface allowing soft and smooth light output
- LED Colors available in Warm White, Blue, Red

Specifications


- Lighting Source | SMD LED
- Voltage Rating | DC 12V
- Power Consumption | 0.25W
- Note | IP67 

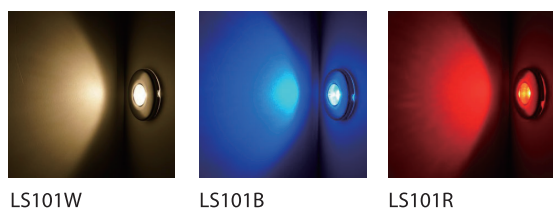

Economical LED Step Lights / Courtesy Light

LS102

Best
Seller

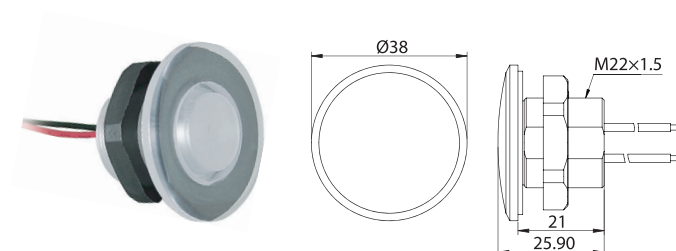

Features

- Completely sealed – completely waterproof even undertemporary water immersion (IP67)
- Compact size and easy to install
- Matte Surface allowing soft and smooth light output
- LED Colors available in Warm White, Blue, Red
- Also applicable as live well bait tank light

Specifications


- Lighting Source | SMD LED
- Voltage Rating | DC 12V
- Power Consumption | 0.25W
- Note | IP67 




LED Step Light / Courtesy Light with Single or Double Light Rays

LS103 (Round)


LS113 (Square)

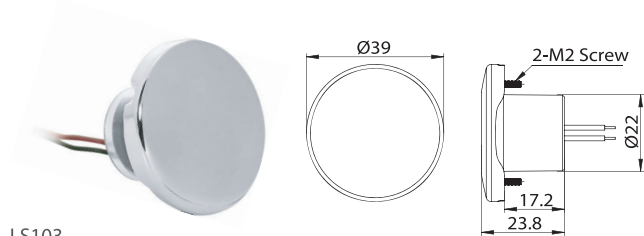

LS103

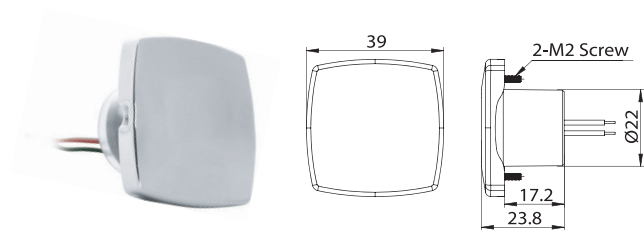

LS113

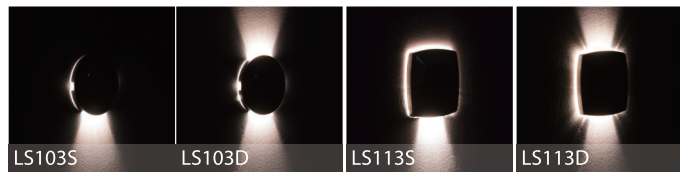

LS103S

LS103D

LS113S

LS113D

Features

- Polished marine grade stainless steel (SAE 316) faceplate
- Single or Double light rays provides elegant illumination
- Completely sealed – completely waterproof even undertemporary water immersion (IP67)
- Compact size and easy to install
- Available in warm white or cold white color
- Dual voltage rating for both 12V & 24V systems


Specifications

- Lighting Source | SMD LED
- Color Temperature | 2900-3200K(Warm White)
- Voltage Rating | DC 10-30V
- Power Consumption | 0.24W(Single Ray) / 0.36W (Double Ray)
- Note | IP67 


LED Step Light / Courtesy Light with Light Ring

LS104 (Round)


LS114 (Square)

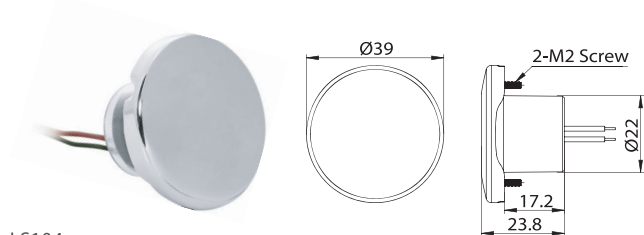

LS104

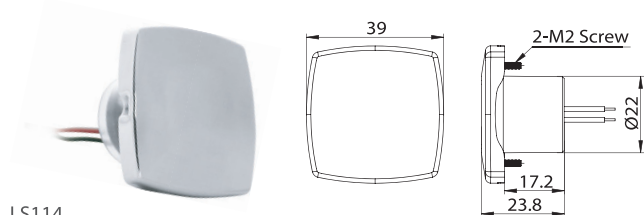

LS114

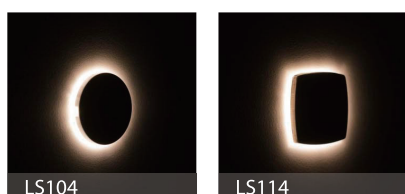

LS104

LS114

Features

- Polished marine grade stainless steel (SAE 316) faceplate
- Sun eclipse like light ring effects
- Completely sealed – completely waterproof even undertemporary water immersion (IP67)
- Compact size and easy to install
- Available in warm white or cold white color

Specifications

- Lighting Source | SMD LED
- Voltage Rating | DC 12V
- Power Consumption | 0.25W
- Note | IP67 



Customize Packaging For Your Products More Eco-Friendly!



Almost all of YIS Marine's quality products come with retail display packages. We can accept low MOQ orders. Designed for the aftermarket, our blister or colored boxes packages typically include customizable label stickers, instruction manual and installation accessories - everything consumers need to install the products themselves. Our blisters and box packages are made locally in Taiwan with good quality that matches the products within them. All of our blister packages are made of 100% recyclable PET plastic and we also offer paper based packaging to ensure more eco-friendly packaging for our planet. In addition to supplying our quality products, we also provide marketing support like blister card / box design, instruction manual or even marketing support for customer's catalogue design. Customer's logo on blister cards are also possible.

